

---

**BGPCEP**  
*Release master*

Sep 18, 2019



---

## Contents

---

<b>1</b>	<b>Developer Guides</b>	<b>3</b>
<b>2</b>	<b>User Guides</b>	<b>19</b>



This documentation provides critical information needed to help you write code for the BGPCEP project.



# CHAPTER 1

---

## Developer Guides

---

### 1.1 BGP Developer Guide

#### 1.1.1 Overview

This section provides an overview of the `odl-bgpcep-bgp-all` Karaf feature. This feature will install everything needed for BGP (Border Gateway Protocol) from establishing the connection, storing the data in RIBs (Route Information Base) and displaying data in network-topology overview.

#### 1.1.2 BGP Architecture

Each feature represents a module in the BGPCEP codebase. The following diagram illustrates how the features are related.

#### 1.1.3 Key APIs and Interfaces

##### BGP concepts

This module contains the base BGP concepts contained in [RFC 4271](#), [RFC 4760](#), [RFC 4456](#), [RFC 1997](#) and [RFC 4360](#).

All the concepts are described in one yang model: `bgp-types.yang`.

Outside generated classes, there is just one class `NextHopUtil` that contains methods for serializing and parsing `NextHop`.

##### BGP parser

Base BGP parser includes messages and attributes from [RFC 4271](#), [RFC 4760](#), [RFC 1997](#) and [RFC 4360](#).

*API* module defines BGP messages in YANG.

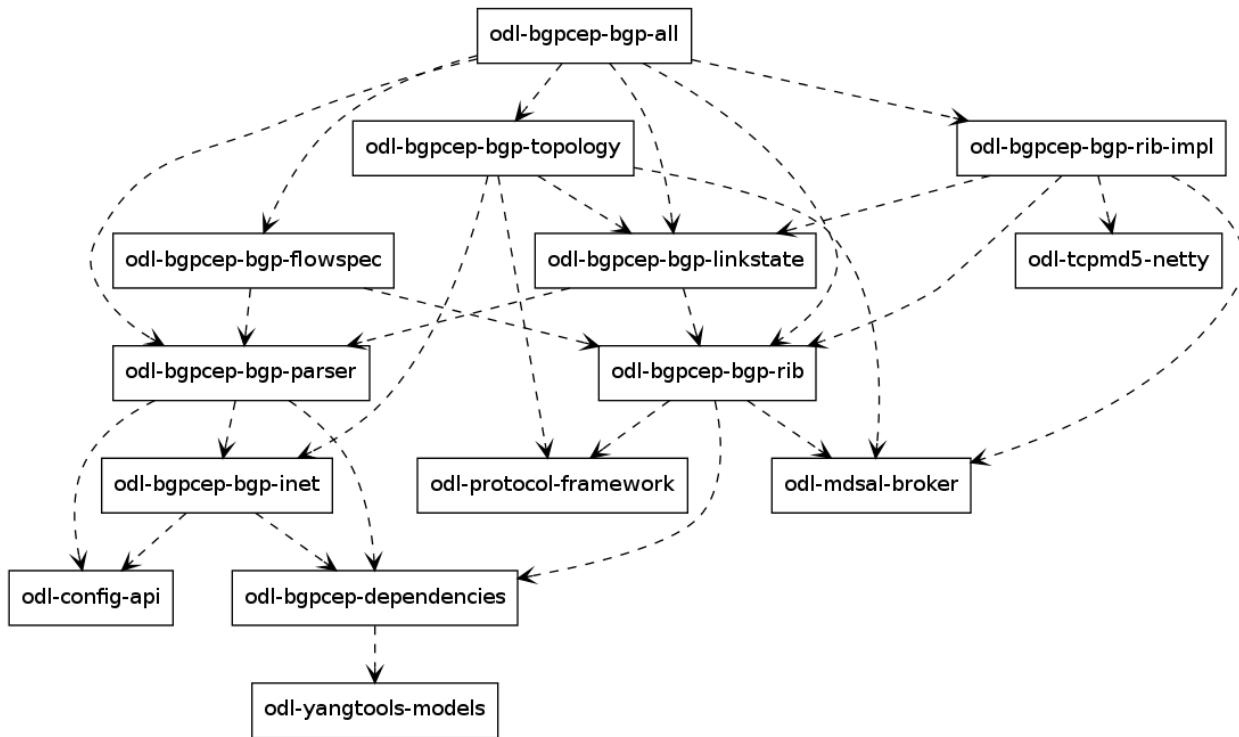


Fig. 1: BGP Dependency Tree

*IMPL* module contains actual parsers and serializers for BGP messages and `Activator` class

*SPI* module contains helper classes needed for registering parsers into activators

## Registration

All parsers and serializers need to be registered into the *Extension provider*. This *Extension provider* is configured in initial configuration of the parser-spi module (`31-bgp.xml`).

```

<module>
  <type xmlns:prefix="urn:opendaylight:params:xml:ns:yang:controller:bgp:parser:spi">
    <prefix:bgp-extensions-impl/>
  <name>global-bgp-extensions</name>
  <extension>
    <type xmlns:bgpspi="urn:opendaylight:params:xml:ns:yang:controller:bgp:parser:spi">
      <bgpspi:extension/>
      <name>base-bgp-parser</name>
    </extension>
    <extension>
      <type xmlns:bgpspi="urn:opendaylight:params:xml:ns:yang:controller:bgp:parser:spi">
        <bgpspi:extension/>
        <name>bgp-linkstate</name>
      </extension>
    </extension>
  </module>
  
```

- *base-bgp-parser* - will register parsers and serializers implemented in the `bgp-parser-impl` module
- *bgp-linkstate* - will register parsers and serializers implemented in the `bgp-linkstate` module

The bgp-linkstate module is a good example of a BGP parser extension.

The configuration of bgp-parser-spi specifies one implementation of *Extension provider* that will take care of registering mentioned parser extensions: `SimpleBGPExtensionProviderContext`. All registries are implemented in package `bgp-parser-spi`.

## Serializing

The serializing of BGP elements is mostly done in the same way as in *PCEP*, the only exception is the serialization of path attributes, which is described here. Path attributes are different from any other BGP element, as path attributes don't implement one common interface, but this interface contains getters for individual path attributes (this structure is because update message can contain exactly one instance of each path attribute). This means, that a given *PathAttributes* object, you can only get to the specific type of the path attribute through checking its presence. Therefore method `serialize()` in *AttributeRegistry*, won't look up the registered class, instead it will go through the registrations and offer this object to the each registered parser. This way the object will be passed also to serializers unknown to module `bgp-parser`, for example to `LinkstateAttributeParser`. RFC 4271 recommends ordering path attributes, hence the serializers are ordered in a list as they are registered in the *Activator*. In other words, this is the only case, where registration ordering matters.

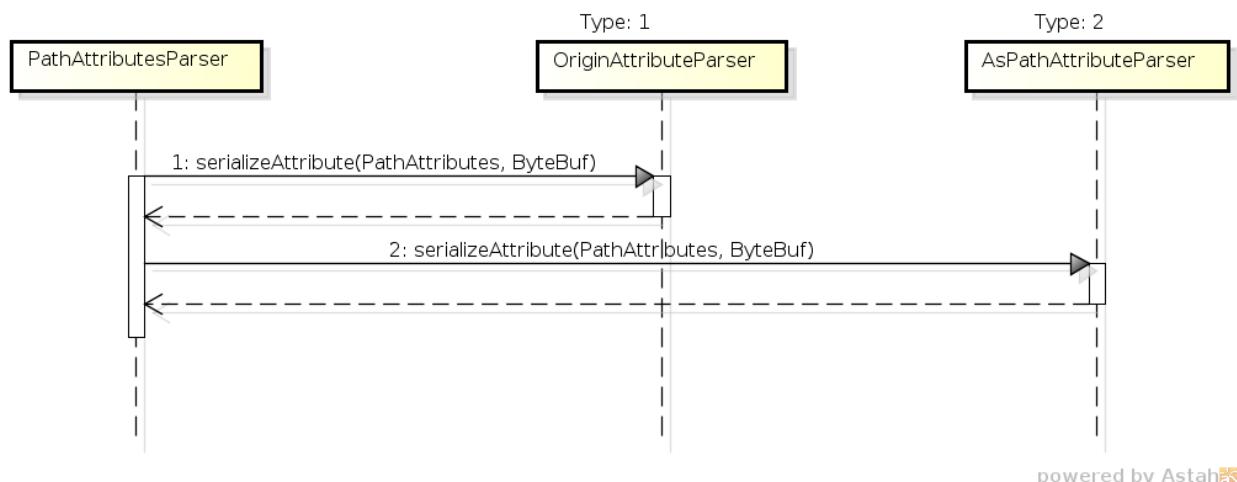


Fig. 2: PathAttributesSerialization

`serialize()` method in each Path Attribute parser contains check for presence of its attribute in the `PathAttributes` object, which simply returns, if the attribute is not there:

```

if (pathAttributes.getAtomicAggregate() == null) {
    return;
}
//continue with serialization of Atomic Aggregate

```

### 1.1.4 BGP RIB

The BGP RIB module can be divided into two parts:

- BGP listener and speaker session handling
- RIB handling.

## Session handling

31-bgp.xml defines only bgp-dispatcher and the parser it should be using (global-bgp-extensions).

```
<module>
<type>prefix:bgp-dispatcher-impl</type>
<name>global-bgp-dispatcher</name>
<bgp-extensions>
<type>bgpspi:extensions</type>
<name>global-bgp-extensions</name>
</bgp-extensions>
<boss-group>
<type>netty:netty-threadgroup</type>
<name>global-boss-group</name>
</boss-group>
<worker-group>
<type>netty:netty-threadgroup</type>
<name>global-worker-group</name>
</worker-group>
</module>
```

For user configuration of BGP, check User Guide.

## Synchronization

Synchronization is a phase, where upon connection, a BGP speaker sends all available data about topology to its new client. After the whole topology has been advertised, the synchronization is over. For the listener, the synchronization is over when the RIB receives End-of-RIB (EOR) messages. There is a special EOR message for each AFI (Address Family Identifier).

- IPv4 EOR is an empty Update message.
- Ipv6 EOR is an Update message with empty MP\_UNREACH attribute where AFI and SAFI (Subsequent Address Family Identifier) are set to Ipv6. OpenDaylight also supports EOR for IPv4 in this format.
- Linkstate EOR is an Update message with empty MP\_UNREACH attribute where AFI and SAFI are set to Linkstate.

For BGP connections, where both peers support graceful restart, the EORs are sent by the BGP speaker and are redirected to RIB, where the specific AFI/SAFI table is set to *true*. Without graceful restart, the messages are generated by OpenDaylight itself and sent after second keepalive for each AFI/SAFI. This is done in [BGPSynchronization](#).

## Peers

[BGPPeer](#) has various meanings. If you configure BGP listener, *BGPPeer* represents the BGP listener itself. If you are configuring BGP speaker, you need to provide a list of peers, that are allowed to connect to this speaker. Unknown peer represents, in this case, a peer that is allowed to be refused. *BGPPeer* represents in this case peer, that is supposed to connect to your speaker. *BGPPeer* is stored in [BGPPeerRegistry](#). This registry controls the number of sessions. Our strict implementation limits sessions to one per peer.

[ApplicationPeer](#) is a special case of peer, that has it's own RIB. This RIB is populated from RESTCONF. The RIB is synchronized with default BGP RIB. Incoming routes to the default RIB are treated in the same way as they were from a BGP peer (speaker or listener) in the network.

## RIB handling

RIB (Route Information Base) is defined as a concept in [RFC 4271](#). RFC does not define how it should be implemented. In our implementation, the routes are stored in the MD-SAL datastore. There are four supported routes -

*Ipv4Routes*, *Ipv6Routes*, *LinkstateRoutes* and *FlowspecRoutes*.

Each route type needs to provide a [RIBSupport.java](#) implementation. *RIBSupport* tells RIB how to parse binding-aware data (BGP Update message) to binding-independent (datastore format).

Following picture describes the data flow from BGP message that is sent to *BGPPeer* to datastore and various types of RIB.

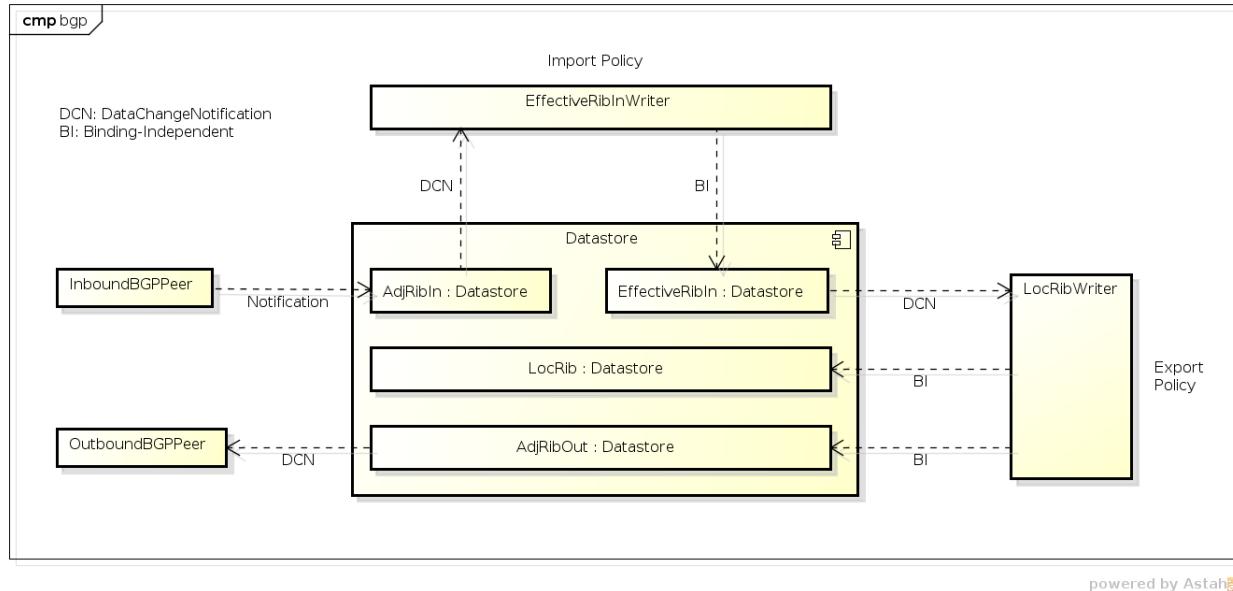


Fig. 3: RIB

*AdjRibInWriter* - represents the first step in putting data to datastore. This writer is notified whenever a peer receives an Update message. The message is transformed into binding-independent format and pushed into datastore to *adj-rib-in*. This RIB is associated with a peer.

*EffectiveRibInWriter* - this writer is notified whenever *adj-rib-in* is updated. It applies all configured import policies to the routes and stores them in *effective-rib-in*. This RIB is also associated with a peer.

*LocRibWriter* - this writer is notified whenever **any** *effective-rib-in* is updated (in any peer). Performs best path selection filtering and stores the routes in *loc-rib*. It also determines which routes need to be advertised and fills in *adj-rib-out* that is per peer as well.

*AdjRibOutListener* - listens for changes in *adj-rib-out*, transforms the routes into BGPUpdate messages and sends them to its associated peer.

### 1.1.5 BGP inet

This module contains only one YANG model [bgp-inet.yang](#) that summarizes the ipv4 and ipv6 extensions to RIB routes and BGP messages.

### 1.1.6 BGP flowspec

BGP flowspec is a module that implements [RFC 5575](#) for IPv4 AFI and [draft-ietf-idr-flow-spec-v6-06](#) for IPv6 AFI. The RFC defines an extension to BGP in form of a new subsequent address family, NLRI and extended communities. All of those are defined in the [bgp-flowspec.yang](#) model. In addition to generated sources, the module contains

parsers for newly defined elements and RIBSupport for flowspec-routes. The route key of flowspec routes is a string representing human-readable flowspec request.

### 1.1.7 BGP linkstate

BGP linkstate is a module that implements [draft-ietf-idr-ls-distribution](#) version 04. The draft defines an extension to BGP in form of a new address family, subsequent address family, NLRI and path attribute. All of those are defined in the [bgp-linkstate.yang](#) model. In addition to generated sources, the module contains [LinkstateAttributeParser](#), [LinkstateNlriParser](#), activators for both, parser and RIB, and RIBSupport handler for linkstate address family. As each route needs a key, in case of linkstate, the route key is defined as a binary string, containing all the NLRI serialized to byte format. The BGP linkstate extension also supports distribution of MPLS TE state as defined in [draft-ietf-idr-te-lsp-distribution-03](#), extension for Segment Routing [draft-gredler-idr-bgp-ls-segment-routing-ext-00](#) and Segment Routing Egress Peer Engineering [draft-ietf-idr-bgpls-segment-routing-epc-02](#).

### 1.1.8 BGP labeled-unicast

BGP labeled unicast is a module that implements [RFC 3107](#). The RFC defines an extension to the BGP MP to carry Label Mapping Information as a part of the NLRI. The AFI indicates, as usual, the address family of the associated route. The fact that the NLRI contains a label is indicated by using SAFI value 4. All of those are defined in [bgp-labeled-unicast.yang](#) model. In addition to the generated sources, the module contains new NLRI codec and RIBSupport. The route key is defined as a binary, where whole NLRI information is encoded.

### 1.1.9 BGP topology provider

BGP data besides RIB, is stored in network-topology view. The format of how the data is displayed there conforms to [draft-clemm-netmod-yang-network-topo](#).

### 1.1.10 API Reference Documentation

Javadocs are generated while creating mvn:site and they are located in target/ directory in each module.

## 1.2 BGP Monitoring Protocol Developer Guide

### 1.2.1 Overview

This section provides an overview of **feature odl-bgpcep-bmp**. This feature will install everything needed for BMP (BGP Monitoring Protocol) including establishing the connection, processing messages, storing information about monitored routers, peers and their Adj-RIB-In (unprocessed routing information) and Post-Policy Adj-RIB-In and displaying data in BGP RIBs overview. The OpenDaylight BMP plugin plays the role of a monitoring station.

### 1.2.2 Key APIs and Interfaces

#### Session handling

*32-bmp.xml* defines only bmp-dispatcher the parser should be using (global-bmp-extensions).

```

<module>
  <type xmlns:prefix="urn:opendaylight:params:xml:ns:yang:controller:bmp:impl">
    ↵prefix:bmp-dispatcher-impl</type>
    <name>global-bmp-dispatcher</name>
    <bmp-extensions>
      <type xmlns:bmp-spi="urn:opendaylight:params:xml:ns:yang:controller:bmp:spi">bmp-
        ↵spi:extensions</type>
        <name>global-bmp-extensions</name>
      </bmp-extensions>
    </boss-group>
    <type xmlns:netty="urn:opendaylight:params:xml:ns:yang:controller:netty">
      ↵netty:netty-threadgroup</type>
      <name>global-boss-group</name>
    </boss-group>
    <worker-group>
      <type xmlns:netty="urn:opendaylight:params:xml:ns:yang:controller:netty">
        ↵netty:netty-threadgroup</type>
        <name>global-worker-group</name>
      </worker-group>
    </module>
  
```

For user configuration of BMP, check User Guide.

## Parser

The base BMP parser includes messages and attributes from <https://tools.ietf.org/html/draft-ietf-grow-bmp-15>

## Registration

All parsers and serializers need to be registered into *Extension provider*. This *Extension provider* is configured in initial configuration of the parser (`32-bmp.xml`).

```

<module>
  <type xmlns:prefix="urn:opendaylight:params:xml:ns:yang:controller:bmp:spi">
    ↵prefix:bmp-extensions-impl</type>
    <name>global-bmp-extensions</name>
    <extension>
      <type xmlns:bmp-spi="urn:opendaylight:params:xml:ns:yang:controller:bmp:spi">bmp-
        ↵spi:extension</type>
        <name>bmp-parser-base</name>
      </extension>
    </module>
  
```

- *bmp-parser-base* - will register parsers and serializers implemented in bmp-impl module

## Parsing

Parsing of BMP elements is mostly done equally to BGP. Some of the BMP messages includes wrapped BGP messages.

## BMP Monitoring Station

The BMP application (Monitoring Station) serves as message processor incoming from monitored routers. The processed message is transformed and relevant information is stored. Route information is stored in a BGP RIB data

structure.

BMP data is displayed only through one URL that is accessible from the base BMP URL:

'<http://<controllerIP>:8181/restconf/operational/bmp-monitor:bmp-monitor>'

Each Monitor station will be displayed and it may contains multiple monitored routers and peers within:

```
<bmp-monitor xmlns="urn:opendaylight:params:xml:ns:yang:bmp-monitor">
<monitor>
<monitor-id>example-bmp-monitor</monitor-id>
<router>
<router-id>127.0.0.11</router-id>
<status>up</status>
<peer>
<peer-id>20.20.20.20</peer-id>
<as>72</as>
<type>global</type>
<peer-session>
<remote-port>5000</remote-port>
<timestamp-sec>5</timestamp-sec>
<status>up</status>
<local-address>10.10.10.10</local-address>
<local-port>220</local-port>
</peer-session>
<pre-policy-rib>
<tables>
<afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-address-
family</afi>
<safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
subsequent-address-family</safi>
<ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
<ipv4-route>
<prefix>10.10.10.0/24</prefix>
<attributes>
...
</attributes>
</ipv4-route>
</ipv4-routes>
<attributes>
<uptodate>true</uptodate>
</attributes>
</tables>
</pre-policy-rib>
<address>10.10.10.10</address>
<post-policy-rib>
...
</post-policy-rib>
<bgp-id>20.20.20.20</bgp-id>
<stats>
<timestamp-sec>5</timestamp-sec>
<invalidated-cluster-list-loop>53</invalidated-cluster-list-loop>
<duplicate-prefix-advertisements>16</duplicate-prefix-advertisements>
<loc-rib-routes>100</loc-rib-routes>
<duplicate-withdraws>11</duplicate-withdraws>
<invalidated-as-confed-loop>55</invalidated-as-confed-loop>
<adj-ribs-in-routes>10</adj-ribs-in-routes>
<invalidated-as-path-loop>66</invalidated-as-path-loop>
```

(continues on next page)

(continued from previous page)

```

<invalidated-originator-id>70</invalidated-originator-id>
<rejected-prefixes>8</rejected-prefixes>
</stats>
</peer>
<name>name</name>
<description>description</description>
<info>some info;</info>
</router>
</monitor>
</bmp-monitor>
</source>

```

### 1.2.3 API Reference Documentation

Javadocs are generated while creating mvn:site and they are located in target/ directory in each module.

## 1.3 PCEP Developer Guide

### 1.3.1 Overview

This section provides an overview of **feature odl-bgpcep-pcep-all**. This feature will install everything needed for PCEP (Path Computation Element Protocol) including establishing the connection, storing information about LSPs (Label Switched Paths) and displaying data in network-topology overview.

### 1.3.2 PCEP Architecture

Each feature represents a module in the BGPCEP codebase. The following diagram illustrates how the features are related.

### 1.3.3 Key APIs and Interfaces

#### PCEP

##### Session handling

*32-pcep.xml* defines only pcep-dispatcher the parser should be using (global-pcep-extensions), factory for creating session proposals (you can create different proposals for different PCCs (Path Computation Clients)).

```

<module>
  <type xmlns:prefix="urn:opendaylight:params:xml:ns:yang:controller:pcep:impl">
    <prefix:pcep-dispatcher-impl</type>
    <name>global-pcep-dispatcher</name>
    <pcep-extensions>
      <type xmlns:prefix="urn:opendaylight:params:xml:ns:yang:controller:pcep:spi">
        <prefix:pcepspi-extensions</type>
        <name>global-pcep-extensions</name>
      </pcep-extensions>
    <pcep-session-proposal-factory>

```

(continues on next page)

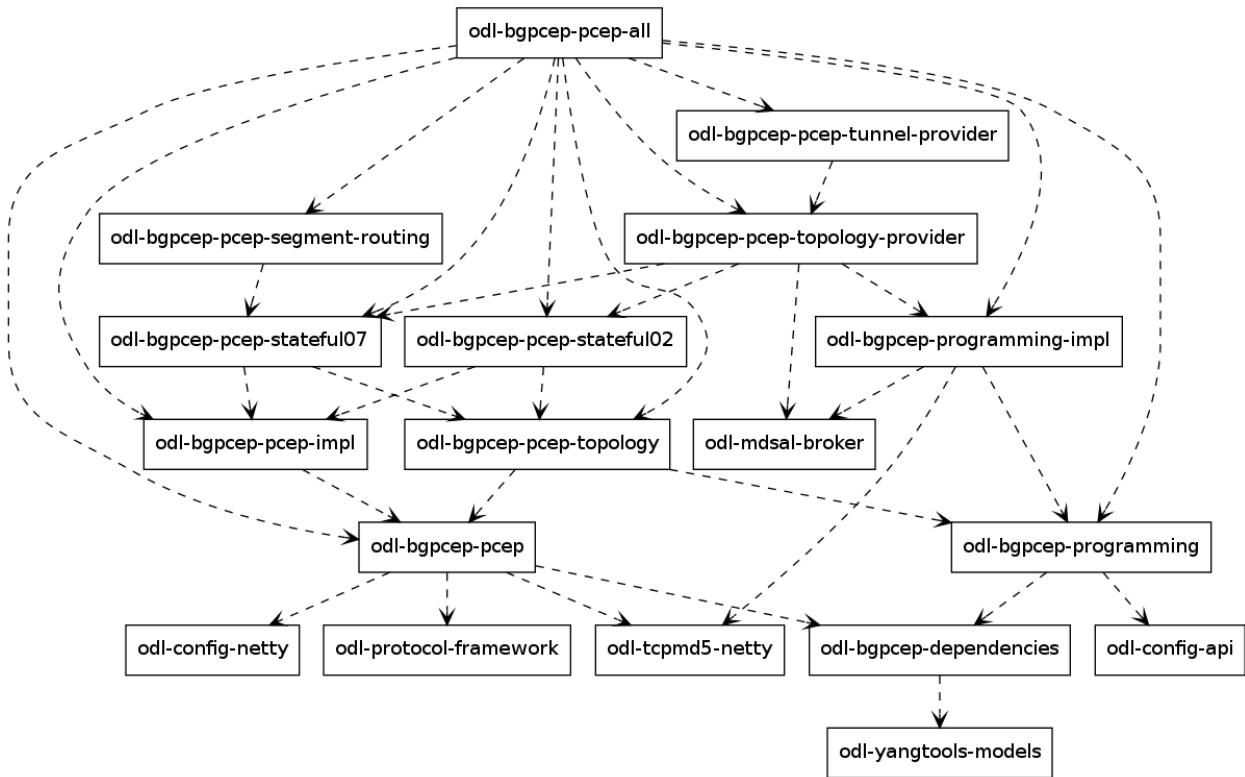


Fig. 4: PCEP Dependency Tree

(continued from previous page)

```

<type xmlns:pcep="urn:opendaylight:params:xml:ns:yang:controller:pcep">pcep:pcep-
  ↵session-proposal-factory</type>
  <name>global-pcep-session-proposal-factory</name>
</pcep-session-proposal-factory>
<boss-group>
  <type xmlns:netty="urn:opendaylight:params:xml:ns:yang:controller:netty">
    ↵netty:netty-threadgroup</type>
    <name>global-boss-group</name>
  </boss-group>
  <worker-group>
    <type xmlns:netty="urn:opendaylight:params:xml:ns:yang:controller:netty">
      ↵netty:netty-threadgroup</type>
      <name>global-worker-group</name>
    </worker-group>
  </module>

```

For user configuration of PCEP, check User Guide.

## Parser

The base PCEP parser includes messages and attributes from RFC5441, RFC5541, RFC5455, RFC5557 and RFC5521.

## Registration

All parsers and serializers need to be registered into *Extension provider*. This *Extension provider* is configured in initial configuration of the parser-spi module (`32-pcep.xml`).

```
<module>
  <type xmlns:prefix="urn:opendaylight:params:xml:ns:yang:controller:pcep:spi">
    <prefix:pcep-extensions-impl</type>
    <name>global-pcep-extensions</name>
    <extension>
      <type xmlns:pcepspi="urn:opendaylight:params:xml:ns:yang:controller:pcep:spi">
        <pcepspi:extension</type>
        <name>pcep-parser-base</name>
      </extension>
      <extension>
        <type xmlns:pcepspi="urn:opendaylight:params:xml:ns:yang:controller:pcep:spi">
          <pcepspi:extension</type>
          <name>pcep-parser-ietf-stateful07</name>
        </extension>
        <extension>
          <type xmlns:pcepspi="urn:opendaylight:params:xml:ns:yang:controller:pcep:spi">
            <pcepspi:extension</type>
            <name>pcep-parser-ietf-initiated00</name>
          </extension>
          <extension>
            <type xmlns:pcepspi="urn:opendaylight:params:xml:ns:yang:controller:pcep:spi">
              <pcepspi:extension</type>
              <name>pcep-parser-sync-optimizations</name>
            </extension>
          </extension>
        </extension>
      </extension>
    </module>
```

- *pcep-parser-base* - will register parsers and serializers implemented in pcep-impl module
- *pcep-parser-ietf-stateful07* - will register parsers and serializers of draft-ietf-pce-stateful-pce-07 implementation
- *pcep-parser-ietf-initiated00* - will register parser and serializer of draft-ietf-pce-pce-initiated-lsp-00 implementation
- *pcep-parser-sync-optimizations* - will register parser and serializers of draft-ietf-pce-stateful-sync-optimizations-03 implementation

Stateful07 module is a good example of a PCEP parser extension.

Configuration of PCEP parsers specifies one implementation of *Extension provider* that will take care of registering mentioned parser extensions: `SimplePCEPExtensionProviderContext`. All registries are implemented in package `pcep-spi`.

## Parsing

Parsing of PCEP elements is mostly done equally to BGP, the only exception is message parsing, that is described here.

In BGP messages, parsing of first-level elements (path-attributes) can be validated in a simple way, as the attributes should be ordered chronologically. PCEP, on the other hand, has a strict object order policy, that is described in RBNF (Routing Backus-Naur Form) in each RFC. Therefore the algorithm for parsing here is to parse all objects in order as they appear in the message. The result of parsing is a list of *PCEPObjets*, that is put through validation. `validate()` methods are present in each message parser. Depending on the complexity of the message, it can contain either a simple condition (checking the presence of a mandatory object) or a full state machine.

In addition to that, PCEP requires sending error message for each documented parsing error. This is handled by creating an empty list of messages *errors* which is then passed as argument throughout whole parsing process. If some parser encounters *PCEPDocumentedException*, it has the duty to create appropriate PCEP error message and add it to this list. In the end, when the parsing is finished, this list is examined and all messages are sent to peer.

Better understanding provides this sequence diagram:

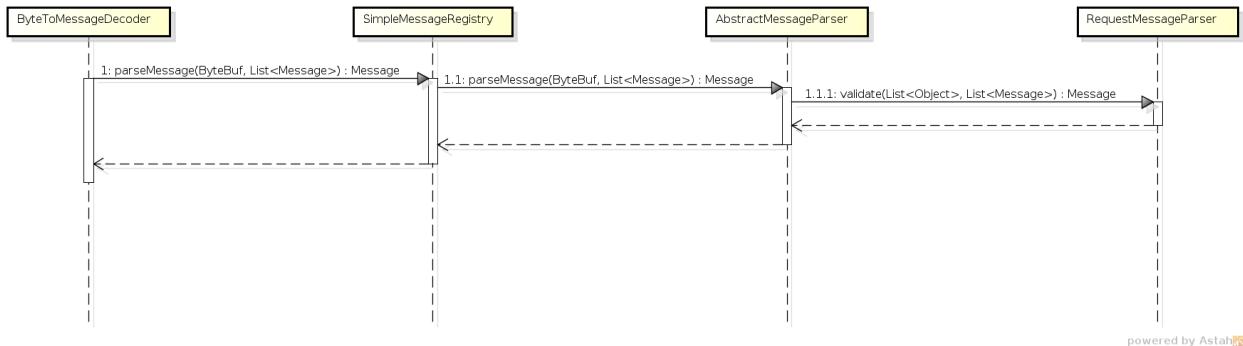


Fig. 5: Parsing

## PCEP IETF stateful

This section summarizes module pcep-ietf-stateful07. The term *stateful* refers to [draft-ietf-pce-stateful-pce](#) and [draft-ietf-pce-pce-initiated-lsp](#) in versions [draft-ietf-pce-stateful-pce-07](#) with [draft-ietf-pce-pce-initiated-lsp-00](#).

We will upgrade our implementation, when the stateful draft gets promoted to RFC.

The stateful module is implemented as extensions to pcep-base-parser. The stateful draft declared new elements as well as additional fields or TLVs (type,length,value) to known objects. All new elements are defined in yang models, that contain augmentations to elements defined in [pcep-types.yang](#). In the case of extending known elements, the *Parser* class merely extends the base class and overrides necessary methods as shown in following diagram:

All parsers (including those for newly defined PCEP elements) have to be registered via the *Activator* class. This class is present in both modules.

In addition to parsers, the stateful module also introduces additional session proposal. This proposal includes new fields defined in stateful drafts for Open object.


## PCEP segment routing (SR)

PCEP Segment Routing is an extension of base PCEP and pcep-ietf-stateful-07 extension. The pcep-segment-routing module implements [draft-ietf-pce-segment-routing-01](#).

The extension brings new SR-ERO (Explicit Route Object) and SR-RRO (Reported Route Object) subobject composed of SID (Segment Identifier) and/or NAI (Node or Adjacency Identifier). The segment Routing path is carried in the ERO and RRO object, as a list of SR-ERO/SR-RRO subobjects in an order specified by the user. The draft defines new TLV - SR-PCE-CAPABILITY TLV, carried in PCEP Open object, used to negotiate Segment Routing ability.

The yang models of subobject, SR-PCE-CAPABILITY TLV and appropriate augmentations are defined in [odl-pcep-segment-routing.yang](#).

The pcep-segment-routing module includes parsers/serializers for new subobject ([SrEroSubobjectParser](#)) and TLV ([SrPceCapabilityTlvParser](#)).

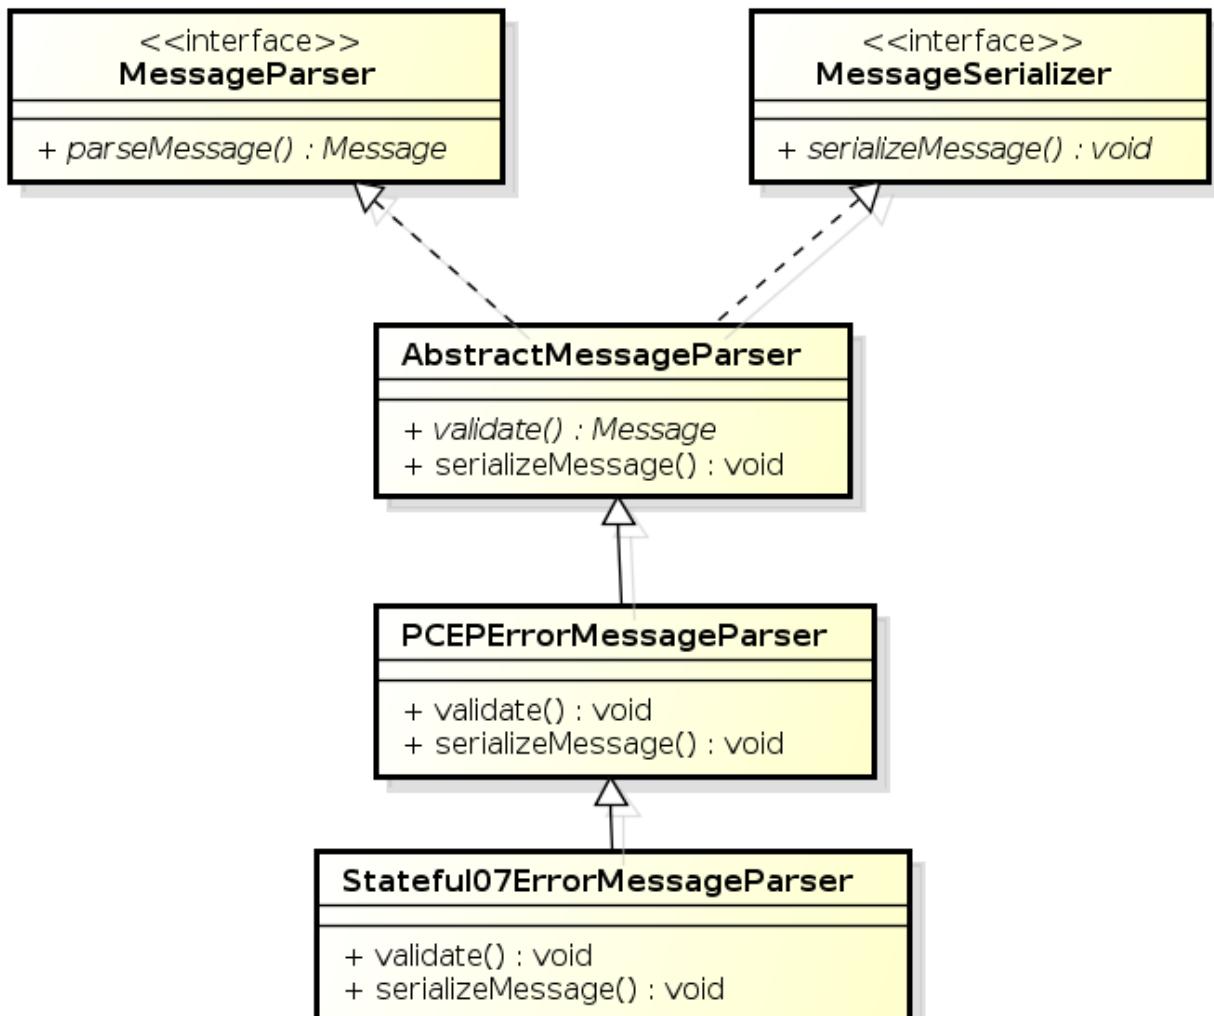

powered by Astah

Fig. 6: Extending existing parsers

The pcep-segment-routing module implements [draft-ietf-pce-lsp-setup-type-01](#), too. The draft defines new TLV - Path Setup Type TLV, which value indicate path setup signaling technique. The TLV may be included in RP(Request Parameters)/SRP(Stateful PCE Request Parameters) object. For the default RSVP-TE (Resource Reservation Protocol), the TLV is omitted. For Segment Routing, PST = 1 is defined.

The Path Setup Type TLV is modeled with yang in module [pcep-types.yang](#). A parser/serializer is implemented in [PathSetupTypeTlvParser](#) and it is overriden in segment-routing module to provide the aditional PST.

## PCEP Synchronization Procedures Optimization

Optimizations of Label Switched Path State Synchronization Procedures for a Stateful PCE [draft-ietf-pce-stateful-sync-optimizations-03](#) specifies following optimizations for state synchronization and the corresponding PCEP procedures and extensions:

- **State Synchronization Avoidance:** To skip state synchronization if the state has survived and not changed during session restart.
- **Incremental State Synchronization:** To do incremental (delta) state synchronization when possible.
- **PCE-triggered Initial Synchronization:** To let PCE control the timing of the initial state synchronization. The capability can be applied to both full and incremental state synchronization.
- **PCE-triggered Re-synchronization:** To let PCE re-synchronize the state for sanity check.

## PCEP Topology

PCEP data is displayed only through one URL that is accessible from the base network-topology URL:

<http://localhost:8181/restconf/operational/network-topology:network-topology/topology/pcep-topology>

Each PCC will be displayed as a node:

```
<node>
  <path-computation-client>
    <ip-address>42.42.42.42</ip-address>
    <state-sync>synchronized</state-sync>
    <stateful-tlv>
      <stateful>
        <initiation>true</initiation>
        <lsp-update-capability>true</lsp-update-capability>
      </stateful>
    </stateful-tlv>
  </path-computation-client>
  <node-id>pcc://42.42.42.42</node-id>
</node>
</source>
```

If some tunnels are configured on the network, they would be displayed on the same page, within a node that initiated the tunnel:

```
<node>
  <path-computation-client>
    <state-sync>synchronized</state-sync>
    <stateful-tlv>
      <stateful>
        <initiation>true</initiation>
        <lsp-update-capability>true</lsp-update-capability>
      </stateful>
    </stateful-tlv>
  </path-computation-client>
</node>
```

(continues on next page)

(continued from previous page)

```

</stateful>
</stateful-tlv>
<reported-lsp>
  <name>foo</name>
  <lsp>
    <operational>down</operational>
    <sync>false</sync>
    <ignore>false</ignore>
    <plsp-id>1</plsp-id>
    <create>false</create>
    <administrative>true</administrative>
    <remove>false</remove>
    <delegate>true</delegate>
    <processing-rule>false</processing-rule>
    <tlvs>
      <lsp-identifiers>
        <ipv4>
          <ipv4-tunnel-sender-address>43.43.43.43</ipv4-tunnel-sender-address>
          <ipv4-tunnel-endpoint-address>0.0.0.0</ipv4-tunnel-endpoint-address>
          <ipv4-extended-tunnel-id>0.0.0</ipv4-extended-tunnel-id>
        </ipv4>
        <tunnel-id>0</tunnel-id>
        <lsp-id>0</lsp-id>
      </lsp-identifiers>
      <symbolic-path-name>
        <path-name>Zm9v</path-name>
      </symbolic-path-name>
    </tlvs>
  </lsp>
</reported-lsp>
<ip-address>43.43.43.43</ip-address>
</path-computation-client>
<node-id>pcc://43.43.43.43</node-id>
</node>

```

Note that, the *<path-name>* tag displays tunnel name in Base64 encoding.

### 1.3.4 API Reference Documentation

Javadocs are generated while creating mvn:site and they are located in target/ directory in each module.



# CHAPTER 2

---

## User Guides

---

### 2.1 BGP User Guide

This guide contains information on how to use OpenDaylight Border Gateway Protocol (BGP) plugin. The user should learn about BGP basic concepts, supported capabilities, configuration and usage.

#### 2.1.1 Overview

This section provides high-level overview of the Border Gateway Protocol, OpenDaylight implementation and BGP usage in SDN era.

##### Contents

- *Border Gateway Protocol*
- *BGP in SDN*
- *OpenDaylight BGP plugin*

#### Border Gateway Protocol

The Border Gateway Protocol (BGP) is an inter-Autonomous System (AS) routing protocol. The primary role of the BGP is an exchange of routes among other BGP systems. The route is an unit of information which pairs destination (IP address prefix) with attributes to the path with the destination. One of the most interesting attributes is a list of ASes that the route traversed - essential when avoiding loop routing. Advertised routes are stored in the Routing Information Bases (RIBs). Routes are later used to forward packets, stored in Routing Table for this purpose. The main advantage of the BGP over other routing protocols is its scalability, thus it has become the standardized Internet routing protocol (Internet is a set of ASes).

## BGP in SDN

However BGP evolved long time before SDN was born, it plays a significant role in many SDN use-cases. Also, continuous evolution of the protocol brings extensions that are very well suited for SDN. Nowadays, BGP can carry various types of routing information - L3VPN, L2VPN, IP multicast, linkstate, etc. Here is a brief list of software-based/legacy-network technologies where BGP-based SDN solution get into an action:

- SDN WAN - WAN orchestration and optimization
- SDN router - Turns switch into an Internet router
- Virtual Route Reflector - High-performance server-based BGP Route Reflector
- SDX - A Software Defined Internet Exchange controller
- Large-Scale Data Centers - BGP Data Center Routing, MPLS/SR in DCs, DC interconnection
- DDoS mitigation - Traffic Filtering distribution with BGP

## OpenDaylight BGP plugin

The OpenDaylight controller provides an implementation of BGP (RFC 4271) as a south-bound protocol plugin. The implementation renders all basic *BGP speaker capabilities*:

- inter/intra-AS peering
- routes advertising
- routes originating
- routes storage

The plugin's **north-bound API** (REST/Java) provides to user:

- fully dynamic runtime standardized BGP configuration
- read-only access to all RIBs
- read-write programmable RIBs
- read-only reachability/linkstate topology view

---

**Note:** The BGP plugin is NOT a virtual router - does not construct Routing Tables, nor forward traffic.

---

### 2.1.2 List of supported capabilities

In addition to the base protocol implementation, the plugin provides many extensions to BGP, all based on IETF standards.

- [RFC4271](#) - A Border Gateway Protocol 4 (BGP-4)
- [RFC4456](#) - BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP)
- [RFC1997](#) - BGP Communities Attribute
- [RFC4360](#) - BGP Extended Communities Attribute
- [RFC4486](#) - Subcodes for BGP Cease Notification Message
- [RFC5492](#) - Capabilities Advertisement with BGP-4
- [RFC5004](#) - Avoid BGP Best Path Transitions from One External to Another

- [RFC6286](#) - Autonomous-System-Wide Unique BGP Identifier for BGP-4
- [RFC6793](#) - BGP Support for Four-Octet Autonomous System (AS) Number Space
- [RFC7311](#) - The Accumulated IGP Metric Attribute for BGP
- [RFC5668](#) - 4-Octet AS Specific BGP Extended Community
- [draft-ietf-idr-link-bandwidth](#) - BGP Link Bandwidth Extended Community
- [draft-ietf-idr-bgp-extended-messages](#) - Extended Message support for BGP
- **RFC4760 - Multiprotocol Extensions for BGP-4**
  - **RFC7752 - North-Bound Distribution of Link-State and TE Information using BGP**
    - \* [draft-gredler-idr-bgp-ls-segment-routing-ext](#) - BGP Link-State extensions for Segment Routing
    - \* [draft-ietf-idr-bgppls-segment-routing-epc](#) - Segment Routing Egress Peer Engineering BGP-LS Extensions
  - **RFC5575 - Dissemination of Flow Specification Rules**
    - \* [RFC7674](#) - Clarification of the Flowspec Redirect Extended Community
    - \* [draft-ietf-idr-flow-spec-v6](#) - Dissemination of Flow Specification Rules for IPv6
    - \* [draft-ietf-idr-flowspec-redirect-ip](#) - BGP Flow-Spec Redirect to IP Action
  - **RFC3107 - Carrying Label Information in BGP-4**
    - \* [draft-ietf-idr-bgp-prefix-sid](#) - Segment Routing Prefix SID extensions for BGP
  - **RFC4364 - BGP/MPLS IP Virtual Private Networks (VPNs)**
    - \* [RFC4659](#) - BGP-MPLS IP Virtual Private Network (VPN) Extension for IPv6 VPN
  - **RFC6513 - Multicast in MPLS/BGP IP VPNs (VPNs)**
    - \* [RFC6514](#) - BGP Encodings and Procedures for Multicast in MPLS/BGP IP VPNs
    - \* [RFC6515](#) - IPv4 and IPv6 Infrastructure Addresses in BGP Updates for Multicast VPN
    - \* [RFC4684](#) - Constrained Route Distribution for Border Gateway Protocol/MultiProtocol Label Switching (BGP/MPLS) Internet Protocol (IP) Virtual Private Networks (VPNs)
  - **RFC7432 - BGP MPLS-Based Ethernet VPN**
    - \* [draft-ietf-bess-evpn-overlay](#) - A Network Virtualization Overlay Solution using EVPN
    - \* [draft-ietf-bess-evpn-vpws](#) - VPWS support in EVPN
    - \* [draft-sajassi-bess-evpn-vpws-fxc-01](#) - EVPN VPWS Flexible Cross-Connect Service
  - [RFC7911](#) - Advertisement of Multiple Paths in BGP
  - [RFC2918](#) - Route Refresh Capability for BGP-4
  - **RFC4724 - Graceful Restart Mechanism for BGP**
    - [draft-uttaro-idr-bgp-persistence-04](#) - Support for Long-lived BGP Graceful Restart
  - [RFC7606](#) - Revised Error Handling for BGP UPDATE Messages

## 2.1.3 Running BGP

This section explains how to install BGP plugin.

1. Install BGP feature - odl-bgpcep-bgp. Also, for sake of this sample, it is required to install RESTCONF. In the Karaf console, type command:

```
feature:install odl-restconf odl-bgpcep-bgp
```

2. The BGP plugin contains a default configuration, which is applied after the feature starts up. One instance of BGP plugin is created (named *example-bgp-rib*), and its presence can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bpgr-rib

**Method:** GET

**Response Body:**

```
<bgp-rib xmlns="urn:opendaylight:params:xml:ns:yang:bgp-rib">
  <rib>
    <id>example-bgp-rib</id>
    <loc-rib>
      ...
    </loc-rib>
  </rib>
</bgp-rib>
```

## 2.1.4 Basic Configuration & Concepts

The following section shows how to configure BGP basics, how to verify functionality and presents essential components of the plugin. Next samples demonstrate the plugin's runtime configuration capability. It shows the way to configure the plugin via REST, using standardized OpenConfig BGP APIs.

### Contents

- *Configuration*
- *BGP RIB API*
- *BGP pipeline*
- *References*

### Configuration

#### Protocol Configuration

As a first step, a new protocol instance needs to be configured. It is a very basic configuration conforming with RFC4271.

---

**Note:** RIB policy must already be configured and present before configuring the protocol.

---

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST**Content-Type:** application/xml**Request Body:**

```

1 <protocol xmlns="http://openconfig.net/yang/network-instance">
2   <name>bgp-example</name>
3   <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
4   <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
5     <global>
6       <config>
7         <router-id>192.0.2.2</router-id>
8         <as>65000</as>
9       </config>
10      <apply-policy>
11        <config>
12          <default-export-policy>REJECT-ROUTE</default-export-policy>
13          <default-import-policy>REJECT-ROUTE</default-import-policy>
14          <import-policy>default-odl-import-policy</import-policy>
15          <export-policy>default-odl-export-policy</export-policy>
16        </config>
17      </apply-policy>
18    </global>
19  </bgp>
20</protocol>
```

@line 2: The unique protocol instance identifier.

@line 7: BGP Identifier of the speaker.

@line 8: Local autonomous system number of the speaker. Note that, OpenDaylight BGP implementation supports four-octet AS numbers only.

@line 14: Default ODL Import Policy.

@line 15: Default ODL Export Policy.

The new instance presence can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example**Method:** GET**Response Body:**

```

1 <rib xmlns="urn:opendaylight:params:xml:ns:yang:bgp-rib">
2   <id>bgp-example</id>
3   <loc-rib>
4     <tables>
5       <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
6         <address-family></address-family>
7         <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
8           <subsequent-address-family></subsequent-address-family>
9           <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet"></ipv4-
10          <routes>
11            <attributes>
12              <uptodate>true</uptodate>
13            </attributes>
14          </tables>
```

(continues on next page)

(continued from previous page)

```

12   </loc-rib>
13 </rib>
```

@line 3: Loc-RIB - Per-protocol instance RIB, which contains the routes that have been selected by local BGP speaker's decision process.

@line 4: The BGP-4 supports carrying IPv4 prefixes, such routes are stored in *ipv4-address-family/unicast-subsequent-address-family* table.

## RIB Policy Configuration

The OpenDaylight BGP implementation supports configurable RIB policies that allow the modification of import and export policies.

---

**Note:** Default ODL BGP RIB Config Policy is provided. Any config policy to be used by Protocol must be configured and present before than Protocol configuration is added. If policy is reconfigured, protocol must be re configured again.

---

**URL:** /restconf/config/openconfig-routing-policy:routing-policy

**Method:** GET

**Content-Type:** application/xml

**Request Body:**

```

1  <routing-policy xmlns="http://openconfig.net/yang/routing-policy">
2    <defined-sets>
3      <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
4        <cluster-id-sets xmlns=
5          "urn:.opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
6          ...
7          </cluster-id-sets>
8          <role-sets xmlns=
9            "urn:.opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
10           ...
11           </role-sets>
12           <originator-id-sets xmlns=
13             "urn:.opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
14               ...
15               </originator-id-sets>
16             </bgp-defined-sets>
17           </defined-sets>
18           <policy-definitions>
19             <policy-definition>
20               <name>default-odl-export-policy</name>
21               <statements>
22                 <statement>
23                   <name>to-odl-internal</name>
24                   <actions>
25                     <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
26                       ...
27                     </bgp-actions>
28                   </actions>
29                   <conditions>
30                     <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy"
31                       ...
32                     </bgp-conditions>
33                   </conditions>
34                 </statement>
35               </statements>
36             </policy-definition>
37           </policy-definitions>
38         </routing-policy>
```

(continues on next page)

(continued from previous page)

```

28          ...
29          </bgp-conditions>
30      </conditions>
31  </statement>
32  ...
33  </statements>
34 </policy-definition>
35 <policy-definition>
36     <name>default-odl-import-policy</name>
37     ...
38   </policy-definition>
39 </policy-definitions>
40 </routing-policy>
```

@line 2: BGP defined sets.

@line 15: Policy definitions.

## Policy Configuration

Conditions may include multiple match or comparison operations; similarly, actions may consist of a multitude of changes to route attributes or a final disposition regarding the acceptance or rejection of the route.

**URL:** /restconf/config/openconfig-routing-policy:routing-policy/openconfig-routing-policy:policy-definitions/

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <policy-definition xmlns="http://openconfig.net/yang/routing-policy">
2   <name>odl-policy-example</name>
3   <statements>
4     <statement>
5       <name>reject-all-incoming-routes</name>
6       <actions>
7         <reject-route/>
8       </actions>
9       <conditions>
10      <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
11        <match-role-set xmlns=
12          ↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
13            <from-role>
14              <role-set>/rpol:routing-policy/rpol:defined-sets/
15            ↳ bgppol:bgp-defined-sets/role-sets/role-set[role-set-name="all"]</role-set>
16            </from-role>
17          </match-role-set>
18        </bgp-conditions>
19      </conditions>
20    </statement>
  </statements>
</policy-definition>
```

@line 2: The unique policy instance identifier.

@line 5: Policy Statement Identifier.

@line 7: Actions.

@line 10: BGP Conditions.

---

The new instance presence can be verified via REST:

**URL:** /restconf/config/openconfig-routing-policy:routing-policy/openconfig-routing-policy:policy-definitions/policy-definition/odl-policy-example

**Method:** GET

**Response Body:**

```
1 <policy-definition xmlns="http://openconfig.net/yang/routing-policy">
2   <name>odl-policy-example</name>
3   <statements>
4     <statement>
5       <name>reject-all-incoming-routes</name>
6       <actions>
7         <reject-route></reject-route>
8       </actions>
9       <conditions>
10      <bpg-conditions xmlns="http://openconfig.net/yang/bgp-policy">
11        <match-role-set xmlns=
12          "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
13          <from-role>
14            <role-set>/rpol:routing-policy/rpol:defined-sets/
15          <bgppol:bgp-defined-sets/role-sets/role-set[role-set-name="all"]</role-set>
16            <match-set-options>ANY</match-set-options>
17          </from-role>
18        </match-role-set>
19      </bpg-conditions>
20    </conditions>
21  </statement>
22 </statements>
23 </policy-definition>
```

@line 2: Policy definition Identifier.

@line 5: Policy Statement Identifier.

## Actions

ODL BGP by default provides support for a group of BGP Actions.

### Accept

Default policy to accept the route.

```
1 <actions>
2   <accept-route/>
3 </actions>
```

## Reject

Default policy to reject the route.

```

1 <actions>
2   <reject-route/>
3 </actions>
```

## As-path prepend

Action to prepend local AS number to the AS-path

```

1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-as-path-prepend/>
4   </bgp-actions>
5 </actions>
```

## Originator Id prepend

Action to prepend Originator Id. In case there is no Originator Id present, local Originator Id is prepended.

- Local

```

1 <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
2   <set-originator-id-prepend xmlns=
3   ↵ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
4 </bgp-actions>
```

- By value

```

1 <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
2   <set-originator-id-prepend xmlns=
3   ↵ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
4     <originator-id>192.0.2.1</originator-id>
5   </set-originator-id-prepend>
6 </bgp-actions>
```

## Cluster Id prepend

Action to prepend local Cluster Id to Cluster Id List.

```

1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-cluster-id-prepend xmlns=
4     ↵ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
5   </bgp-actions>
6 </actions>
```

## Set Route Origin

Set the origin attribute to the specified value.

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-route-origin>IGP</set-route-origin>
4   </bgp-actions>
5 </actions>
```

## Set Local Preference

Set the local pref attribute on the route update.

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-local-pref>100</set-local-pref>
4   </bgp-actions>
5 </actions>
```

## Set NextHop

Set the next-hop attribute in the route update.

- Local

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-next-hop>SELF</set-next-hop>
4   </bgp-actions>
5 </actions>
```

- By value

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-next-hop>4.5.6.7</set-next-hop>
4   </bgp-actions>
5 </actions>
```

## Set MED

Set the med metric attribute in the route update.

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-med>15</set-med>
4   </bgp-actions>
5 </actions>
```

## Community set prepend

Action to set the community attributes of the route, along with options to modify how the community is modified.

- Inline

```

1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-community>
4       <communities>
5         <as-number>65</as-number>
6         <semantics>10</semantics>
7       </communities>
8       <communities>
9         <as-number>66</as-number>
10        <semantics>11</semantics>
11      </communities>
12      <options>ADD</options>
13    </set-community>
14  </bgp-actions>
15 </actions>

```

@line 3: Set Community.

- By reference

```

1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-community>
4       <community-set-ref>
5         /rpol:routing-policy/rpol:defined-sets/rpol:community-sets/community-
6         ↵set [community-set-name="community-set-name-example"]
7       </community-set-ref>
8       <options>ADD</options>
9     </set-community>
10    </bgp-actions>
11 </actions>

```

@line 3: Set Community.

@line 5: Community set reference.

@line 7: Options are ADD, REMOVE, REPLACE.

Defined set

```

1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3     <community-sets>
4       <community-set>
5         <community-set-name>community-set-name-test</community-set-name>
6         <communities>
7           <as-number>65</as-number>
8           <semantics>10</semantics>
9         </communities>
10        <communities>
11          <as-number>66</as-number>
12          <semantics>11</semantics>
13        </communities>
14      </community-set>
15    </community-sets>
16  </bgp-defined-sets>
17 </defined-sets>

```

@line 3: Community set.

### Extended Community set action

Action to set the extended community attributes of the route, along with options to modify how the community is modified.

- Inline

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-ext-community>
4       <ext-community-member>
5         <encapsulation-extended-community>
6           <tunnel-type>vxlan</tunnel-type>
7         </encapsulation-extended-community>
8       </ext-community-member>
9       <ext-community-member>
10      <as-4-route-origin-extended-community>
11        <as-4-specific-common>
12          <as-number>65000</as-number>
13          <local-administrator>123</local-administrator>
14        </as-4-specific-common>
15        </as-4-route-origin-extended-community>
16      </ext-community-member>
17      <options>ADD</options>
18    </set-ext-community>
19  </bgp-actions>
20 </actions>
```

@line 3: Set Extended Community.

- By reference

```
1 <actions>
2   <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3     <set-ext-community>
4       <ext-community-set-ref>
5         /rpol:routing-policy/rpol:defined-sets/rpol:ext-community-sets/ext-
6         ↵community-set[ext-community-set-name="ext-community-set-name-example"]
7       </ext-community-set-ref>
8       <options>REMOVE</options>
9     </set-ext-community>
10    </bgp-actions>
</actions>
```

@line 3: Set Extended Community.

@line 5: Extended Community set reference.

@line 7: Options are ADD, REMOVE, REPLACE.

---

Defined set

```
1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
```

(continues on next page)

(continued from previous page)

```

3      <ext-community-sets>
4          <ext-community-set>
5              <ext-community-set-name>ext-community-set-name-test</ext-community-
6      ↵set-name>
7          <ext-community-member>
8              <encapsulation-extended-community>
9                  <tunnel-type>vxlan</tunnel-type>
10             </encapsulation-extended-community>
11         </ext-community-member>
12         <ext-community-member>
13             <as-4-route-origin-extended-community>
14                 <as-4-specific-common>
15                     <as-number>65000</as-number>
16                     <local-administrator>123</local-administrator>
17                 </as-4-specific-common>
18             </as-4-route-origin-extended-community>
19         </ext-community-member>
20     </ext-community-set>
21 </ext-community-sets>
22 </bgp-defined-sets>
</defined-sets>

```

@line 3: Extendend Community set.

@line 5: Extendend Community set name.

## Filter Non transitive attributes

Filters attributes, removing non transitive attributes.

```

1 <actions>
2     <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3         <non-transitive-attributes-filter xmlns=
4             ↵"urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
5     </bgp-actions>
</actions>

```

## Client Attribute Prepend

Replace attributes per any VPN Route attributes from client Peer, if present.

```

1 <actions>
2     <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
3         <client-attribute-prepend xmlns=
4             ↵"urn:opendaylight:params:xml:ns:yang:bgp:route:target:constraint"/>
5     </bgp-actions>
</actions>

```

## Conditions

ODL BGP by default provides support for a group of BGP Conditions.

## Match BGP Neighbor Set

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-bgp-neighbor-set xmlns=
4       ↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <from-neighbor>
6         <neighbor-set>/rpol:routing-policy/rpol:defined-sets/rpol:neighbor-
7           ↳ sets/neighbor-set[neighbor-set-name="bgp-neighbor-set-example"]</neighbor-set>
8           <match-set-options>INVERT</match-set-options>
9         </from-neighbor>
10        </match-bgp-neighbor-set>
11      </bgp-conditions>
12    </conditions>

```

@line 3: Match BGP Neighbor Condition set.

@line 4: Match BGP Neighbor from whom we receive the route.

@line 5: Match BGP Neighbor Set reference.

@line 6: Match Set Options (ANY, INVERT)

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-bgp-neighbor-set xmlns=
4       ↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <to-neighbor>
6         <neighbor-set>/rpol:routing-policy/rpol:defined-sets/rpol:neighbor-
7           ↳ sets/neighbor-set[neighbor-set-name="bgp-neighbor-set-example"]</neighbor-set>
8           <match-set-options>INVERT</match-set-options>
9         </to-neighbor>
10        </match-bgp-neighbor-set>
11      </bgp-conditions>
12    </conditions>

```

@line 3: Match BGP Neighbor Condition set.

@line 4: Match BGP Neighbor to whom we send the route.

@line 5: Match BGP Neighbor Set reference.

@line 6: Match Set Options (ANY, INVERT)

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-bgp-neighbor-set xmlns=
4       ↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <from-neighbor>
6         <neighbor-set>/rpol:routing-policy/rpol:defined-sets/rpol:neighbor-
7           ↳ sets/neighbor-set[neighbor-set-name="bgp-neighbor-set-example"]</neighbor-set>
8         </from-neighbor>
9         <to-neighbor>
10        <neighbor-set>/rpol:routing-policy/rpol:defined-sets/rpol:neighbor-
11           ↳ sets/neighbor-set[neighbor-set-name="bgp-neighbor-set-example"]</neighbor-set>
12           <match-set-options>INVERT</match-set-options>
13         </to-neighbor>
14       </match-bgp-neighbor-set>
15     </bgp-conditions>
16   </conditions>

```

---

@line 3: Match BGP Neighbor Condition set.  
 @line 4: Match BGP Neighbor from whom we receive the route.  
 @line 5: Match BGP Neighbor Set reference.  
 @line 7: Match BGP Neighbor to whom we send the route.  
 @line 8: Match BGP Neighbor Set reference.  
 @line 9: Match Set Options (ANY, INVERT)

---

#### Defined set

```

1  <defined-sets>
2    <neighbor-sets>
3      <neighbor-set>
4        <neighbor-set-name>bgp-neighbor-set-example</neighbor-set-name>
5        <neighbor>
6          <address>127.0.0.1</address>
7        </neighbor>
8        <neighbor>
9          <address>127.0.0.2</address>
10       </neighbor>
11     </neighbor-set>
12   </neighbor-sets>
13 </defined-sets>
```

@line 3: Originator Id Set.  
 @line 5: Originator Id Set name.

#### Match Originator Id Set

```

1  <conditions>
2    <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3      <match-originator-id-set-condition xmlns=
4        "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5        <originator-id-set>
6          /rpol:routing-policy/rpol:defined-sets/bgppol:bgp-defined-sets/
7          ↳originator-id-sets/originator-id-set[originator-set-name="local-originator-id"]
8            </originator-id-set>
9            <match-set-options>INVERT</match-set-options>
10           </match-originator-id-set-condition>
11         </bgp-conditions>
12       </conditions>
```

@line 3: Match Originator Id Condition set.  
 @line 5: Match Originator Id Set reference.  
 @line 7: Match Set Options (ANY, INVERT)

---

#### Defined set

```
1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3     <originator-id-sets xmlns=
4       "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <originator-id-set>
6         <originator-id-set-name>local-originator-id</originator-id-set-name>
7         <local/>
8       </originator-id-set>
9     </originator-id-sets>
10    </bgp-defined-sets>
11  </defined-sets>
```

@line 3: Originator Id Set.

@line 5: Originator Id Set name.

## Match Cluster Id Set

```
1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-cluster-id-set-condition xmlns=
4       "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <cluster-id-set>
6         /rpol:routing-policy/rpol:defined-sets/bgppol:bgp-defined-sets/
7         <cluster-id-sets><cluster-id-set[cluster-set-name="local-cluster-id"]>
8           <cluster-id-set>
9             <match-set-options>INVERT</match-set-options>
10            </match-cluster-id-set-condition>
11          </bgp-conditions>
12        </conditions>
```

@line 3: Match Cluster Id Condition set.

@line 5: Match Cluster Id Set reference.

---

## Defined set

```
1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3     <cluster-id-sets xmlns=
4       "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <cluster-id-set>
6         <cluster-id-set-name>local-cluster-id</cluster-id-set-name>
7         <local/>
8       </cluster-id-set>
9     </cluster-id-sets>
10    </bgp-defined-sets>
11  </defined-sets>
```

@line 3: Cluster Id Set.

@line 5: Cluster Id Set name.

## Match Peer Role Set

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-role-set xmlns=
4       ↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
5       <from-role>
6         <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-defined-
7           ↳ sets/role-sets/role-set[role-set-name="only-ibgp"]</role-set>
8           <match-set-options>INVERT</match-set-options>
9         </from-role>
10        <to-role>
11          <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-defined-
12            ↳ sets/role-sets/role-set[role-set-name="all"]</role-set>
13          </to-role>
14        </match-role-set>
15      </bgp-conditions>
16    </conditions>

```

@line 3: Match Role Set.

@line 5: Match Role Set reference.

@line 6: Match Set Options (ANY, INVERT)

## Defined set

```

1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3     <role-set>
4       <role-set-name>all</role-set-name>
5         <role>ebgp</role>
6         <role>ibgp</role>
7         <role>rr-client</role>
8         <role>internal</role>
9       </role-set>
10      <role-set>
11        <role-set-name>only-ibgp</role-set-name>
12          <role>ibgp</role>
13        </role-set>
14      </bgp-defined-sets>
15    </defined-sets>

```

@line 3: Role Set.

@line 4: Role Set name.

@line 10: Role Set.

@line 11: Role Id Set name.

## Match AS Path Set

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-as-path-set>

```

(continues on next page)

(continued from previous page)

```

4      <as-path-set>
5          /rpol:routing-policy/rpol:defined-sets/bgp-pol:bgp-defined-sets/bgp-
6          ↳pol:as-path-sets/bgp-pol:as-path-set/[as-path-set-name="as-path-set-example"]
7              </as-path-set>
8                  <match-set-options>ANY</match-set-options>
9              </match-as-path-set>
10             </bgp-conditions>
11         </conditions>

```

@line 3: Match AS Path Set.

@line 5: AS Path Set reference.

@line 7: Match Set Option(ANY, ALL, INVERT).

**Defined set**

```

1 <defined-sets>
2     <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3         <as-path-sets>
4             <as-path-set>
5                 <as-path-set-name>as-path-set-example</as-path-set-name>
6                 <as-path-set-member>65</as-path-set-member>
7                 <as-path-set-member>64</as-path-set-member>
8                 <as-path-set-member>63</as-path-set-member>
9             </as-path-set>
10            </as-path-sets>
11        </bgp-defined-sets>
12    </defined-sets>

```

@line 4: AS Path Set.

@line 5: AS Path Set name.

@line 6: AS Path set member

**Match Community Set**

```

1 <conditions>
2     <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3         <match-community-set>
4             <community-set>
5                 /rpol:routing-policy/rpol:defined-sets/rpol:community-sets/community-
6                 ↳set [community-set-name="community-set-name-example"]
7                     </community-set>
8                     <match-set-options>ANY</match-set-options>
9                 </match-community-set>
10                </bgp-conditions>
11            </conditions>

```

@line 3: Match Community Set.

@line 5: Match Community Set reference.

@line 7: Match Set Option(ANY, ALL, INVERT).

Defined set

```

1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3     <community-sets>
4       <community-set>
5         <community-set-name>community-set-name-example</community-set-name>
6         <communities>
7           <as-number>65</as-number>
8           <semantics>10</semantics>
9         </communities>
10        <communities>
11          <as-number>66</as-number>
12          <semantics>11</semantics>
13        </communities>
14      </community-set>
15    </community-sets>
16  </bgp-defined-sets>
17 </defined-sets>
```

@line 4: Community Set.

@line 5: Community Set name.

@line 6: Communities.

@line 10: Communities.

## Match Extended Community Set

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <match-ext-community-set>
4       <ext-community-set>
5         /rpol:routing-policy/rpol:defined-sets/rpol:ext-community-sets/ext-
6         ↵community-set [ext-community-set-name="ext-community-set-name-test"]
7       </ext-community-set>
8       <match-set-options>ANY</match-set-options>
9     </match-ext-community-set>
10    </bgp-conditions>
11  </conditions>
```

@line 3: Match Extended Community Set.

@line 5: Match Extended Community Set reference.

@line 7: Match Set Option(ANY, ALL, INVERT).

Defined set

```

1 <defined-sets>
2   <bgp-defined-sets xmlns="http://openconfig.net/yang/bgp-policy">
3     <ext-community-sets>
4       <ext-community-set>
5         <ext-community-set-name>ext-community-set-name-test</ext-community-
6         ↵set-name>
7         <ext-community-member>
```

(continues on next page)

(continued from previous page)

```

7          <encapsulation-extended-community>
8              <tunnel-type>vxlan</tunnel-type>
9          </encapsulation-extended-community>
10         </ext-community-member>
11         <ext-community-member>
12             <as-4-route-origin-extended-community>
13                 <as-4-specific-common>
14                     <as-number>65000</as-number>
15                     <local-administrator>123</local-administrator>
16                 </as-4-specific-common>
17             </as-4-route-origin-extended-community>
18         </ext-community-member>
19     </ext-community-set>
20   </ext-community-sets>
21 </bgp-defined-sets>
22 </defined-sets>
```

@line 4: Extended Community Set.

@line 5: Extended Community Set name.

@line 6: Extended Communities.

@line 11: Extended Communities.

## Match in Afi Safi

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <afi-safi-in xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-UNICAST</
4   <afi-safi-in>
5 </bgp-conditions>
6 </conditions>
```

@line 3: Afi Safi match.

## Match not in Afi Safi

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <afi-safi-not-in xmlns=
4       "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"
5       xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-UNICAST</afi-safi-
6     <not-in>
7       <afi-safi-not-in xmlns=
8       "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"
9       xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV6-UNICAST</afi-safi-
10      <not-in>
11        </bgp-conditions>
12      </conditions>
```

@line 3: Afi Safi not in match.

## Match As Path Length

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <as-path-length>
4       <operator xmlns:x="http://openconfig.net/yang/policy-types">x:attribute-
5         <eq></operator>
6         <value>2</value>
7       </as-path-length>
8     </bgp-conditions>
9   </conditions>

```

@line 3: As Path Length match.

## Match Local Pref

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <local-pref-eq>100</local-pref-eq>
4   </bgp-conditions>
5 </conditions>

```

@line 3: Local Preference match.

## Match Origin

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <origin-eq>IGP</origin-eq>
4   </bgp-conditions>
5 </conditions>

```

@line 3: Origin match.

## Match MED

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <med-eq>100</med-eq>
4   </bgp-conditions>
5 </conditions>

```

@line 3: MED match.

## Match Next Hop

```

1 <conditions>
2   <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3     <next-hop-in>192.168.2.2</next-hop-in>
4     <next-hop-in>42.42.42.42</next-hop-in>

```

(continues on next page)

(continued from previous page)

```
5   </bgp-conditions>
6   </conditions>
```

@line 3: Next hop match.

### Match VPN Non member

True if Route Targets attributes does not match with any Route Target Constrain advertized per Advertized peer.

```
1   <conditions>
2     <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
3       <vpn-non-member xmlns=
4         ↪"urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
5     </bgp-conditions>
6   </conditions>
```

@line 3: VPN Non member match.

### BGP Server

BGP uses TCP as its transport protocol, by default listens on port 179. OpenDaylight BGP plugin is configured to listen on port 1790, due to privileged ports restriction for non-root users. One of the workarounds is to use port redirection. In case other port is desired to be used instead, we can reconfigure it.

Here is a sample of bgp port listening re-configuration:

**URL:** /restconf/config/odl-bgp-peer-acceptor-config:bgp-peer-acceptor-config/default

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1   <bgp-peer-acceptor-config xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-peer-
2     ↪acceptor-config">
3     <config-name>default</config-name>
4     <binding-address>0.0.0.0</binding-address>
5     <binding-port>1791</binding-port>
6   </bgp-peer-acceptor-config>
```

@line 3: Binding address: By default is 0.0.0.0, so it is not a mandatory field.

@line 4: Binding Port: Port were BGP Server will listen.

### BGP Peering

To exchange routing information between two BGP systems (peers), it is required to configure a peering on both BGP speakers first. This mean that each BGP speaker has a white list of neighbors, representing remote peers, with which the peering is allowed. The TCP connection is established between two peers and they exchange messages to open and confirm the connection parameters followed by routes exchange.

Here is a sample basic neighbor configuration:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor-address>192.0.2.1</neighbor-address>
3     <timers>
4       <config>
5         <hold-time>90</hold-time>
6         <connect-retry>10</connect-retry>
7       </config>
8     </timers>
9     <transport>
10      <config>
11        <remote-port>179</remote-port>
12        <passive-mode>false</passive-mode>
13        <!--<local-address>192.0.2.5</local-address>-->
14      </config>
15    </transport>
16    <config>
17      <peer-type>INTERNAL</peer-type>
18    </config>
19    <afi-safis>
20      ...
21    </afi-safis>
22  </neighbor>
```

@line 2: IP address of the remote BGP peer. Also serves as an unique identifier of a neighbor in a list of neighbors.

@line 5: Proposed number of seconds for value of the Hold Timer. Default value is **90**.

@line 6: Time interval in seconds between attempts to establish session with the peer. Effective in active mode only. Default value is **30**.

@line 11: Remote port number to which the local BGP is connecting. Effective in active mode only. Default value **179**.

@line 12: Wait for peers to issue requests to open a BGP session, rather than initiating sessions from the local router. Default value is **false**.

@line 13: Optional Local IP (either IPv4 or IPv6) address used to establish connections to the remote peer. Effective in active mode only.

@line 17: Explicitly designate the peer as internal or external. Default value is **INTERNAL**.

@line 19: Enable families.

---

Once the remote peer is connected and it advertised routes to local BGP system, routes are stored in peer's RIBs. The RIBs can be checked via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/peer/bgp:%2F%2F192.0.2.1

**Method:** GET

**Response Body:**

```
1 <peer xmlns="urn:opendaylight:params:xml:ns:yang:bgp-rib">
2   <peer-id>bgp://192.0.2.1</peer-id>
3   <supported-tables>
4     <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-address-
5       family</afi>
6       <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
7       subsequent-address-family</safi>
8     </supported-tables>
9     <peer-role>ibgp</peer-role>
10    <adj-rib-in>
11      <tables>
12        <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
13       address-family</afi>
14       <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
15       subsequent-address-family</safi>
16       <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
17         <ipv4-route>
18           <path-id>0</path-id>
19           <prefix>10.0.0.10/32</prefix>
20           <attributes>
21             <as-path></as-path>
22             <origin>
23               <value>igp</value>
24             </origin>
25             <local-pref>
26               <pref>100</pref>
27             </local-pref>
28             <ipv4-next-hop>
29               <global>10.10.1.1</global>
30             </ipv4-next-hop>
31           </attributes>
32         </ipv4-route>
33       </ipv4-routes>
34       <attributes>
35         <uptodate>true</uptodate>
36       </attributes>
37     </tables>
38   </adj-rib-in>
39   <effective-rib-in>
40     <tables>
41       <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
42       address-family</afi>
43       <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
44       subsequent-address-family</safi>
45       <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
46         <ipv4-route>
47           <path-id>0</path-id>
48           <prefix>10.0.0.10/32</prefix>
49           <attributes>
50             <as-path></as-path>
51             <origin>
```

(continues on next page)

(continued from previous page)

```

52             <global>10.10.1.1</global>
53         </ipv4-next-hop>
54     </attributes>
55   </ipv4-route>
56 </ipv4-routes>
57 <attributes>
58   <uptodate>true</uptodate>
59 </attributes>
60 </tables>
61 </effective-rib-in>
62 <adj-rib-out>
63   <tables>
64     <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
65   ↵address-family</afi>
66     <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
67   ↵subsequent-address-family</safi>
68     <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet"></ipv4-
69   ↵routes>
70     <attributes></attributes>
71   </tables>
72 </adj-rib-out>
73 </peer>

```

@line 8: **Adj-RIB-In** - Per-peer RIB, which contains unprocessed routes that has been advertised to local BGP speaker by the remote peer.

@line 13: Here is the reported route with destination *10.0.0.10/32* in Adj-RIB-In.

@line 35: **Effective-RIB-In** - Per-peer RIB, which contains processed routes as a result of applying inbound policy to Adj-RIB-In routes.

@line 40: Here is the reported route with destination *10.0.0.10/32*, same as in Adj-RIB-In, as it was not touched by import policy.

@line 62: **Adj-RIB-Out** - Per-peer RIB, which contains routes for advertisement to the peer by means of the local speaker's UPDATE message.

@line 66: The peer's Adj-RIB-Out is empty as there are no routes to be advertise from local BGP speaker.

Also the same route should appeared in Loc-RIB now:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/ipv4-routes

**Method:** GET

**Response Body:**

```

1 <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
2   <ipv4-route>
3     <path-id>0</path-id>
4     <prefix>10.0.0.10/32</prefix>
5     <attributes>
6       <as-path></as-path>
7       <origin>
8         <value>igp</value>

```

(continues on next page)

(continued from previous page)

```

9      </origin>
10     <local-pref>
11       <pref>100</pref>
12     </local-pref>
13     <ipv4-next-hop>
14       <global>10.10.1.1</global>
15     </ipv4-next-hop>
16   </attributes>
17 </ipv4-route>
18 </ipv4-routes>

```

@line 4: **Destination** - IPv4 Prefix Address.

@line 6: **AS\_PATH** - mandatory attribute, contains a list of the autonomous system numbers through that routing information has traversed.

@line 8: **ORIGIN** - mandatory attribute, indicates an origin of the route - **ibgp, egp, incomplete**.

@line 11: **LOCAL\_PREF** - indicates a degree of preference for external routes, higher value is preferred.

@line 14: **NEXT\_HOP** - mandatory attribute, defines IP address of the router that should be used as the next hop to the destination.

There are much more attributes that may be carried along with the destination:

#### BGP-4 Path Attributes

- **MULTI\_EXIT\_DISC (MED)** Optional attribute, to be used to discriminate among multiple exit/entry points on external links, lower number is preferred.

```

<multi-exit-disc>
  <med>0</med>
</multi-exit-disc>

```

- **ATOMIC\_AGGREGATE** Indicates whether AS\_SET was excluded from AS\_PATH due to routes aggregation.

```
<atomic-aggregate/>
```

- **AGGREGATOR** Optional attribute, contains AS number and IP address of a BGP speaker which performed routes aggregation.

```

<aggregator>
  <as-number>65000</as-number>
  <network-address>192.0.2.2</network-address>
</aggregator>

```

- **Unrecognised** Optional attribute, used to store optional attributes, unrecognized by a local BGP speaker.

```

<unrecognized-attributes>
  <partial>true</partial>
  <transitive>true</transitive>
  <type>101</type>
  <value>0101010101010101</value>
</unrecognized-attributes>

```

#### Route Reflector Attributes

- **ORIGINATOR\_ID** Optional attribute, carries BGP Identifier of the originator of the route.

```
<originator-id>
  <originator>41.41.41.41</originator>
</originator-id>
```

- **CLUSTER\_LIST** Optional attribute, contains a list of CLUSTER\_ID values representing the path that the route has traversed.

```
<cluster-id>
  <cluster>40.40.40.40</cluster>
</cluster-id>
```

- **Communities** Optional attribute, may be used for policy routing.

```
<communities>
  <as-number>65000</as-number>
  <semantics>30740</semantics>
</communities>
```

## Extended Communities

- **Route Target** Identifies one or more routers that may receive a route.

```
<extended-communities>
  <transitive>true</transitive>
  <route-target-ipv4>
    <global-administrator>192.0.2.2</global-administrator>
    <local-administrator>123</local-administrator>
  </route-target-ipv4>
</extended-communities>
<extended-communities>
  <transitive>true</transitive>
  <as-4-route-target-extended-community>
    <as-4-specific-common>
      <as-number>65000</as-number>
      <local-administrator>123</local-administrator>
    </as-4-specific-common>
  </as-4-route-target-extended-community>
</extended-communities>
```

- **Route Origin** Identifies one or more routers that injected a route.

```
<extended-communities>
  <transitive>true</transitive>
  <route-origin-ipv4>
    <global-administrator>192.0.2.2</global-administrator>
    <local-administrator>123</local-administrator>
  </route-origin-ipv4>
</extended-communities>
<extended-communities>
  <transitive>true</transitive>
  <as-4-route-origin-extended-community>
    <as-4-specific-common>
      <as-number>65000</as-number>
      <local-administrator>123</local-administrator>
    </as-4-origin-common>
  </as-4-route-target-extended-community>
</extended-communities>
```

- **Link Bandwidth** Carries the cost to reach external neighbor.

```
<extended-communities>
  <transitive>true</transitive>
  <link-bandwidth-extended-community>
    <bandwidth>BH9CQAA=</bandwidth>
  </link-bandwidth-extended-community>
</extended-communities>
```

- **AIGP** Optional attribute, carries accumulated IGP metric.

```
<aigp>
  <aigp-tlv>
    <metric>120</metric>
  </aigp-tlv>
</aigp>
```

---

**Note:** When the remote peer disconnects, it disappear from operational state of local speaker instance and advertised routes are removed too.

---

## External peering configuration

An example above provided configuration for internal peering only. Following configuration sample is intended for external peering:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor-address>192.0.2.3</neighbor-address>
3   <config>
4     <peer-type>EXTERNAL</peer-type>
5     <peer-as>64999</peer-as>
6   </config>
7 </neighbor>
```

@line 5: AS number of the remote peer.


## Local AS

The local-AS feature allows a router(eBGP) to appear to be a member of a second autonomous system (AS), in addition to its real AS.

In above figure, R3 is eBGP router with configured local-as of 62, and peer-as of 63.

In updates sent from R3 to R2, the AS\_SEQUENCE in the AS\_PATH attribute contains “62 63”. And updates sent from R2 to R3, the AS\_SEQUENCE in the AS\_PATH attribute contains “62 65”.

AS 62 will be prepended to updates that are sent to and received from R3.

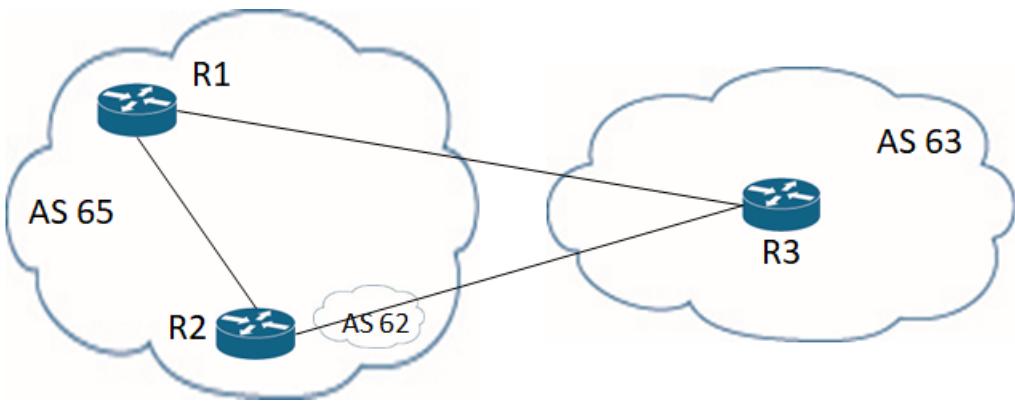

Following configuration sample is intended for external peering with Local AS:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor-address>192.0.2.3</neighbor-address>
3   <config>
4     <peer-type>EXTERNAL</peer-type>
5     <peer-as>63</peer-as>
6     <local-as>62</local-as>
7   </config>
8 </neighbor>
```

@line 5: AS number of the remote peer.

@line 6: Local AS number of the remote peer.

## Route reflector configuration

The local BGP speaker can be configured with a specific *cluster ID*. Following example adds the cluster ID to the existing speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/global/config

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

1 <config>
2   <router-id>192.0.2.2</router-id>
3   <as>65000</as>
4   <route-reflector-cluster-id>192.0.2.1</route-reflector-cluster-id>
5 </config>
```

@line 4: Route-reflector cluster id to use when local router is configured as a route reflector. The `router-id` is used as a default value.

Following configuration sample is intended for route reflector client peering:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**


```

1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:openconfig-extensions">
2   <neighbor-address>192.0.2.4</neighbor-address>
3   <config>
4     <peer-type>INTERNAL</peer-type>
5   </config>
6   <route-reflector>
7     <config>
8       <route-reflector-client>true</route-reflector-client>
9     </config>
10    </route-reflector>
11 </neighbor>
```

@line 8: Configure the neighbor as a route reflector client. Default value is *false*.

## Route reflector and Multiple Cluster IDs

An optional non-transitive attribute called CLUSTER\_LIST is modified when a route reflector reflects a prefix. For loop prevention the route reflector adds its own cluster ID to, and discards any update containing router's own cluster ID. Using multiple cluster IDs allows updates to propagate to nodes that reside in a different cluster.

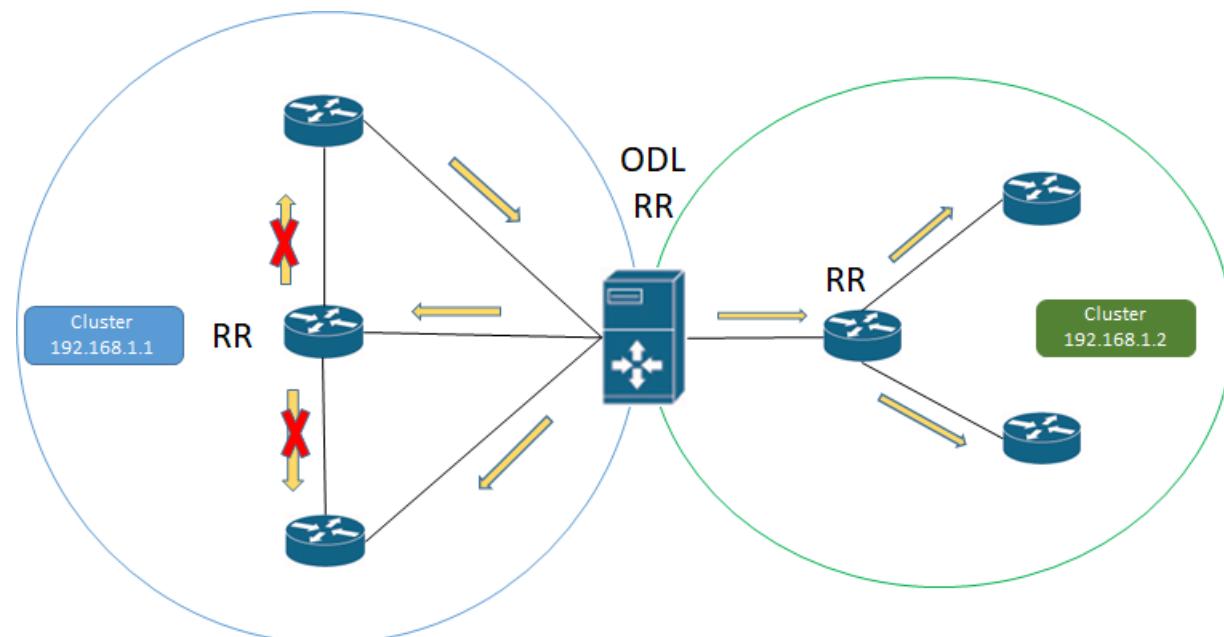

Following configuration sample is intended for route reflector client peering using specific cluster id:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor-address>192.0.2.4</neighbor-address>
3   <config>
4     <peer-type>INTERNAL</peer-type>
5   </config>
6   <route-reflector>
7     <config>
8       <route-reflector-client>true</route-reflector-client>
9       <route-reflector-cluster-id>192.0.2.4</route-reflector-cluster-id>
10      </config>
11    </route-reflector>
12  </neighbor>
```

@line 8: Configure the neighbor as a route reflector client. Default value is *false*.

@line 9: Route-reflector cluster id to use for this specific neighbor when local router is configured as a route reflector.

## MD5 authentication configuration

The OpenDaylight BGP implementation is supporting TCP MD5 for authentication. Sample configuration below shows how to set authentication password for a peer:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor-address>192.0.2.5</neighbor-address>
3   <config>
4     <auth-password>topsecret</auth-password>
5   </config>
6 </neighbor>
```

@line 4: Configures an MD5 authentication password for use with neighboring devices.

## BGP Peer Group

Allows the creation of a peer group configuration that applies to all peers configured as part of the group.

A sample peer group configuration follows:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/peer-groups

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <peer-group xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <peer-group-name>internal-neighbor</peer-group-name>
3   <config>
4     <peer-type>INTERNAL</peer-type>
5     <peer-as>64496</peer-as>
6   </config>
7   <transport>
8     <config>
9       <remote-port>179</remote-port>
10      <passive-mode>true</passive-mode>
11    </config>
12  </transport>
13  <timers>
14    <config>
15      <hold-time>180</hold-time>
16      <connect-retry>10</connect-retry>
17    </config>
18  </timers>
19  <route-reflector>
20    <config>
21      <route-reflector-client>false</route-reflector-client>
22    </config>
23  </route-reflector>
24  <afi-safis>
25    <afi-safi>
26      <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:IPV4-
27      ↵UNICAST</afi-safi-name>
28        <!--Advertise N Paths
29        <receive>true</receive>
30        <send-max>0</send-max>-->
31      </afi-safi>
32      <afi-safi>
33        <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:IPV6-
34        ↵UNICAST</afi-safi-name>
35        </afi-safi>
36        <afi-safi>
37          <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:IPV4-
38          ↵LABELLED-UNICAST</afi-safi-name>
39          </afi-safi>
40          <afi-safi>
41            <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:L3VPN-
42            ↵IPV4-UNICAST</afi-safi-name>
43            </afi-safi>
44            <afi-safi>
45              <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:L3VPN-
46              ↵IPV6-UNICAST</afi-safi-name>
```

(continues on next page)

(continued from previous page)

```

45      </afi-safi>
46      <afi-safi>
47          <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:L2VPN-EVPN
48      ↵</afi-safi-name>
49      <afi-safi>
50          <afi-safi-name>LINKSTATE</afi-safi-name>
51      </afi-safi>
52      <afi-safi>
53          <afi-safi-name>IPV4-FLOW</afi-safi-name>
54      </afi-safi>
55      <afi-safi>
56          <afi-safi-name>IPV6-FLOW</afi-safi-name>
57      </afi-safi>
58      <afi-safi>
59          <afi-safi-name>IPV4-L3VPN-FLOW</afi-safi-name>
60      </afi-safi>
61      <afi-safi>
62          <afi-safi-name>IPV6-L3VPN-FLOW</afi-safi-name>
63      </afi-safi>
64  </afi-safis>
65 </peer-group>

```

@line 2: Peer Group Identifier.

A sample basic neighbor configuration using a peer group follows:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2     <neighbor-address>192.0.2.1</neighbor-address>
3     <config>
4         <peer-group>/bgp/neighbors/neighbor/bgp/peer-groups/peer-group[peer-group-name=
5             ↵"internal-neighbor"]</peer-group>
6     </config>
</neighbor>

```

@line 4: Peer group identifier.

**Note:** Existing neighbor configuration can be reconfigured (change configuration parameters) anytime. As a result, established connection is dropped, peer instance is recreated with a new configuration settings and connection re-established.

**Note:** The BGP configuration is persisted on Opendaylight shutdown and restored after the re-start.

## BGP Application Peer and programmable RIB

The OpenDaylight BGP implementation also supports routes injection via *Application Peer*. Such peer has its own programmable RIB, which can be modified by user. This concept allows user to originate new routes and advertise them to all connected peers.

### Application Peer configuration

Following configuration sample show a way to configure the *Application Peer*:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor-address>10.25.1.9</neighbor-address>
3   <config>
4     <peer-group>application-peers</peer-group>
5   </config>
6 </neighbor>
```

@line 2: IP address is uniquely identifying *Application Peer* and its programmable RIB. Address is also used in local BGP speaker decision process.

@line 4: Indicates that peer is associated with *application-peers* group. It serves to distinguish *Application Peer*'s from regular neighbors.

---

The *Application Peer* presence can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/peer/bgp:%2F%2F10.25.1.9

**Method:** GET

**Response Body:**

```
1 <peer xmlns="urn:opendaylight:params:xml:ns:yang:bgp-rib">
2   <peer-id>bgp://10.25.1.9</peer-id>
3   <peer-role>internal</peer-role>
4   <adj-rib-in>
5     <tables>
6       <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
7         <address-family></address-family>
8         <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
9           <subsequent-address-family></subsequent-address-family>
10          <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet"></ipv4-
11            <routes>
12              <attributes>
13                <uptodate>false</uptodate>
14              </attributes>
15            </tables>
```

(continues on next page)

(continued from previous page)

```

13   </adj-rib-in>
14   <effective-rib-in>
15     <tables>
16       <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
17         ↵address-family</afi>
18         <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
19           ↵subsequent-address-family</safi>
20             <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet"></ipv4-
21               ↵routes>
22                 <attributes></attributes>
23               </tables>
24             </effective-rib-in>
25   </peer>

```

@line 3: Peer role for *Application Peer* is *internal*.

@line 8: Adj-RIB-In is empty, as no routes were originated yet.

---

**Note:** There is no Adj-RIB-Out for *Application Peer*.

---

## Programmable RIB

Next example shows how to inject a route into the programmable RIB.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<ipv4-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
  <path-id>0</path-id>
  <prefix>10.0.0.11/32</prefix>
  <attributes>
    <as-path></as-path>
    <origin>
      <value>igp</value>
    </origin>
    <local-pref>
      <pref>100</pref>
    </local-pref>
    <ipv4-next-hop>
      <global>10.11.1.1</global>
    </ipv4-next-hop>
  </attributes>
</ipv4-route>

```

---

Now the injected route appears in *Application Peer's* RIBs and in local speaker's Loc-RIB:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/peer/bgp:%2F%2F10.25.1.9

**Method:** GET

**Response Body:**

```
1 <peer xmlns="urn:opendaylight:params:xml:ns:yang:bgp-rib">
2   <peer-id>bgp://10.25.1.9</peer-id>
3   <peer-role>internal</peer-role>
4   <adj-rib-in>
5     <tables>
6       <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
7         <address-family></address-family>
8         <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
9           <subsequent-address-family></subsequent-address-family>
10          <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
11            <ipv4-route>
12              <path-id>0</path-id>
13              <prefix>10.0.0.11/32</prefix>
14              <attributes>
15                <as-path></as-path>
16                <origin>
17                  <value>igp</value>
18                </origin>
19                <local-pref>
20                  <pref>100</pref>
21                </local-pref>
22                <ipv4-next-hop>
23                  <global>10.11.1.1</global>
24                </ipv4-next-hop>
25              </attributes>
26            </ipv4-route>
27          </ipv4-routes>
28          <attributes>
29            <uptodate>false</uptodate>
30          </attributes>
31        </tables>
32      </adj-rib-in>
33      <effective-rib-in>
34        <tables>
35          <afi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:ipv4-
36            <address-family></address-family>
37            <safi xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types">x:unicast-
38              <subsequent-address-family></subsequent-address-family>
39              <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
40                <ipv4-route>
41                  <path-id>0</path-id>
42                  <prefix>10.0.0.11/32</prefix>
43                  <attributes>
44                    <as-path></as-path>
45                    <origin>
46                      <value>igp</value>
47                    </origin>
48                    <local-pref>
49                      <pref>100</pref>
50                    </local-pref>
51                    <ipv4-next-hop>
52                      <global>10.11.1.1</global>
53                    </ipv4-next-hop>
54                  </attributes>
```

(continues on next page)

(continued from previous page)

```

51      </ipv4-route>
52    </ipv4-routes>
53    <attributes></attributes>
54  </tables>
55  </effective-rib-in>
56</peer>
```

@line 9: Injected route is present in *Application Peer's Adj-RIB-In* and *Effective-RIB-In*.

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/ipv4-routes

**Method:** GET

**Response Body:**

```

1<ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
2  <ipv4-route>
3    <path-id>0</path-id>
4    <prefix>10.0.0.10/32</prefix>
5    <attributes>
6      <as-path></as-path>
7      <origin>
8        <value>igp</value>
9      </origin>
10     <local-pref>
11       <pref>100</pref>
12     </local-pref>
13     <ipv4-next-hop>
14       <global>10.11.1.1</global>
15     </ipv4-next-hop>
16   </attributes>
17 </ipv4-route>
18 <ipv4-route>
19   <path-id>0</path-id>
20   <prefix>10.0.0.10/32</prefix>
21   <attributes>
22     <as-path></as-path>
23     <origin>
24       <value>igp</value>
25     </origin>
26     <local-pref>
27       <pref>100</pref>
28     </local-pref>
29     <ipv4-next-hop>
30       <global>10.10.1.1</global>
31     </ipv4-next-hop>
32   </attributes>
33 </ipv4-route>
34</ipv4-routes>
```

@line 2: The injected route is now present in Loc-RIB along with a route (destination 10.0.0.10/32) advertised by remote peer.

This route is also advertised to the remote peer (*192.0.2.1*), hence route appears in its Adj-RIB-Out:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/peer/bgp:%2F192.0.2.1/adj-rib-out/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes

**Method:** GET

**Response Body:**

```
<ipv4-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
  <path-id>0</path-id>
  <prefix>10.0.0.11/32</prefix>
  <attributes>
    <as-path></as-path>
    <origin>
      <value>igp</value>
    </origin>
    <local-pref>
      <pref>100</pref>
    </local-pref>
    <ipv4-next-hop>
      <global>10.11.1.1</global>
    </ipv4-next-hop>
  </attributes>
</ipv4-route>
```

---

The injected route can be modified (i.e. different path attribute):

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes/ipv4-route/10.0.0.11%2F32/0

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
<ipv4-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
  <path-id>0</path-id>
  <prefix>10.0.0.11/32</prefix>
  <attributes>
    <as-path></as-path>
    <origin>
      <value>igp</value>
    </origin>
    <local-pref>
      <pref>50</pref>
    </local-pref>
    <ipv4-next-hop>
      <global>10.11.1.2</global>
    </ipv4-next-hop>
  </attributes>
</ipv4-route>
```

---

The route can be removed from programmable RIB in a following way:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes/ipv4-route/10.0.0.11%2F32/0

**Method:** DELETE

Also it is possible to remove all routes from a particular table at once:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes/

**Method:** DELETE

Consequently, route disappears from programmable RIB, *Application Peer's* RIBs, Loc-RIB and peer's Adj-RIB-Out (UPDATE message with prefix withdrawal is send).

**Note:** Routes stored in programmable RIB are persisted on Opendaylight shutdown and restored after the re-start.

## BGP Protocol Configuration Loader

BGP Protocol Configuration Loader allows the user to define the static initial configuration for a BGP protocol instance. This service will detect the creation of new configuration files following the pattern `protocols-*.xml` under the path “`etc/opendaylight/bgpcep`”. Once the file is processed, the defined configuration will be available from the configuration Data Store.

**Note:** If the BGP instance is already present, no update or configuration will be applied.

**PATH:** `etc/opendaylight/bgpcep/protocols-config.xml`

```
<protocols xmlns="http://openconfig.net/yang/network-instance">
    <protocol>
        <name>example-bgp-rib</name>
        <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</
        identifier>
        <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
            <global>
                <config>
                    <router-id>192.0.2.2</router-id>
                    <as>64496</as>
                    <!-- if cluster-id is not present, it's value is the same as bgp-
                    id -->
                    <!-- <route-reflector-cluster-id>192.0.2.3</route-reflector-
                    cluster-id> -->
                    <!-- <read-only-limit>120</read-only-limit>-->
                </config>
                <afi-safis>
                    <afi-safi>
                        <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
                            x:IPV4-UNICAST</afi-safi-name>
                        <!--Advertise N Paths
```

(continues on next page)

(continued from previous page)

```

        <receive>true</receive>
        <send-max>2</send-max>-->
    </afi-safi>
    <afi-safi>
        <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
    ↵x:IPV6-UNICAST</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
    ↵x:IPV4-LABELLED-UNICAST</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
    ↵x:IPV6-LABELLED-UNICAST</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
    ↵x:L3VPN-IPV4-UNICAST</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
    ↵x:L3VPN-IPV6-UNICAST</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
    ↵x:L2VPN-EVPN</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name>LINKSTATE</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name>IPV4-FLOW</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name>IPV6-FLOW</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name>IPV4-L3VPN-FLOW</afi-safi-name>
        </afi-safi>
        <afi-safi>
            <afi-safi-name>IPV6-L3VPN-FLOW</afi-safi-name>
        </afi-safi>
        </afi-safis>
    </global>
    <neighbors xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-
    ↵extensions">
        <neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-
    ↵extensions">
            <neighbor-address>192.0.2.1</neighbor-address>
            <config>
                <peer-type>INTERNAL</peer-type>
                <peer-as>64496</peer-as>
            </config>
            <transport>
                <config>
                    <remote-port>179</remote-port>
                    <passive-mode>true</passive-mode>
                </config>
            </transport>
        </neighbor>
    </neighbors>

```

(continues on next page)

(continued from previous page)

```

        </config>
    </transport>
    <timers>
        <config>
            <hold-time>180</hold-time>
            <connect-retry>10</connect-retry>
        </config>
    </timers>
    <route-reflector>
        <config>
            <route-reflector-client>false</route-reflector-client>
        </config>
    </route-reflector>
    <afi-safis>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:IPV4-UNICAST</afi-safi-name>
                <!--Advertise N Paths
                <receive>true</receive>
                <send-max>0</send-max>-->
            </afi-safi>
            <afi-safi>
                <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:IPV6-UNICAST</afi-safi-name>
                </afi-safi>
                <afi-safi>
                    <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:IPV4-LABELLED-UNICAST</afi-safi-name>
                    </afi-safi>
                    <afi-safi>
                        <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:IPV6-LABELLED-UNICAST</afi-safi-name>
                        </afi-safi>
                        <afi-safi>
                            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:L3VPN-IPV4-UNICAST</afi-safi-name>
                            </afi-safi>
                            <afi-safi>
                                <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:L3VPN-IPV6-UNICAST</afi-safi-name>
                                </afi-safi>
                                <afi-safi>
                                    <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-
↪types">x:L2VPN-EVPN</afi-safi-name>
                                    </afi-safi>
                                    <afi-safi>
                                        <afi-safi-name>LINKSTATE</afi-safi-name>
                                    </afi-safi>
                                    <afi-safi>
                                        <afi-safi-name>IPV4-FLOW</afi-safi-name>
                                    </afi-safi>
                                    <afi-safi>
                                        <afi-safi-name>IPV6-FLOW</afi-safi-name>
                                    </afi-safi>
                                    <afi-safi>
                                        <afi-safi-name>IPV4-L3VPN-FLOW</afi-safi-name>
                                    </afi-safi>
                                </afi-safi>
                            </afi-safi>
                        </afi-safi>
                    </afi-safi>
                </afi-safi>
            </afi-safi>
        </afi-safi>
    </afi-safis>

```

(continues on next page)

(continued from previous page)

```

<afi-safi>
    <afi-safi-name>IPV6-L3VPN-FLOW</afi-safi-name>
</afi-safi>
</afi-safis>
</neighbor>
<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-
extensions">
    <neighbor-address>192.0.2.6</neighbor-address>
    <config>
        <peer-group>application-peers</peer-group>
    </config>
</neighbor>
</neighbors>
</bgp>
</protocol>
</protocols>

```

## BGP Configuration Example

BGP provides a feature providing a BGP Protocol and Network Topology configuration file example. Once feature is installed defined configuration will be loaded and setup.

```
feature:install odl-bgpcep-bgp-config-example
```

## BGP RIB API

This tree illustrates the BGP RIBs organization in datastore.

```

bgp-rib
  +-+ro rib* [id]
    +-+ro id          rib-id
    +-+ro peer* [peer-id]
      |  +-+ro peer-id           peer-id
      |  +-+ro peer-role         peer-role
      |  +-+ro simple-routing-policy?  simple-routing-policy
      |  +-+ro supported-tables* [afi safi]
      |    |  +-+ro afi            identityref
      |    |  +-+ro safi           identityref
      |    |  +-+ro send-receive?   send-receive
      |    +-+ro adj-rib-in
      |      |  +-+ro tables* [afi safi]
      |      |    +-+ro afi            identityref
      |      |    +-+ro safi           identityref
      |      |    +-+ro attributes
      |      |      |  +-+ro uptodate?   boolean
      |      |      +-+ro (routes)?
      |      +-+ro effective-rib-in
      |        |  +-+ro tables* [afi safi]
      |        |    +-+ro afi            identityref
      |        |    +-+ro safi           identityref
      |        |    +-+ro attributes
      |        |      |  +-+ro uptodate?   boolean
      |        |      +-+ro (routes)?

```

(continues on next page)

(continued from previous page)

```

|   +-+ro adj-rib-out
|     +-+ro tables* [afi safi]
|       +-+ro afi           identityref
|       +-+ro safi          identityref
|       +-+ro attributes
|         | +-+ro upToDate?  boolean
|         +-+ro (routes)?
+-+ro loc-rib
  +-+ro tables* [afi safi]
    +-+ro afi           identityref
    +-+ro safi          identityref
    +-+ro attributes
      | +-+ro upToDate?  boolean
      +-+ro (routes)?

```

## BGP pipeline

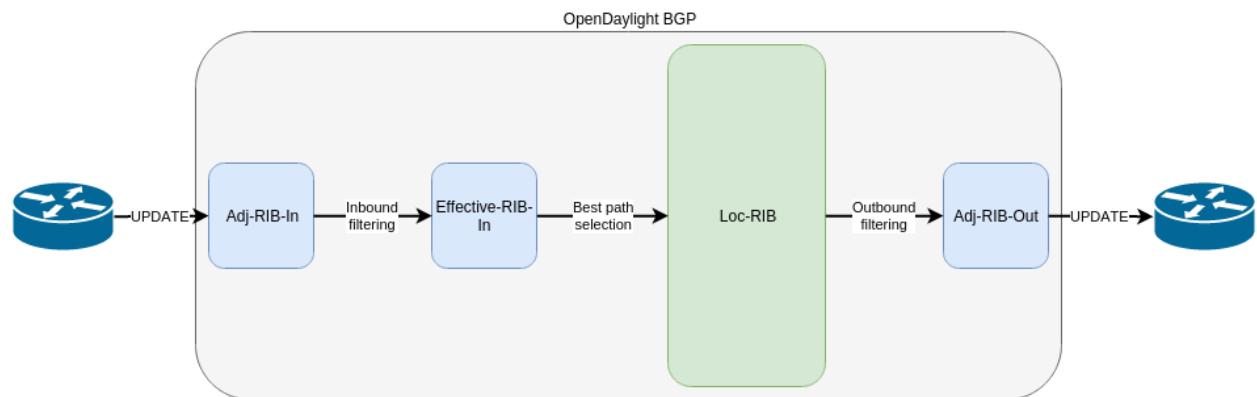


Fig. 1: BGP pipeline - routes re-advertisement.

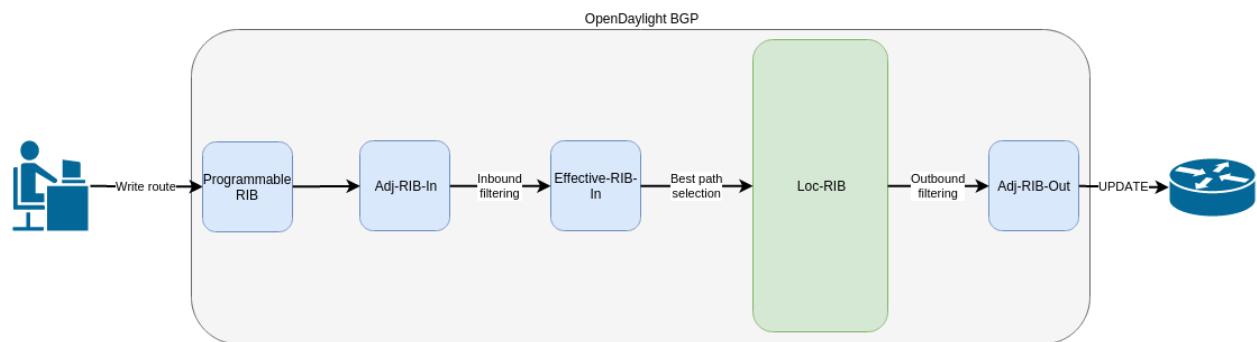


Fig. 2: BGP application peer pipeline - routes injection.

## References

- A Border Gateway Protocol 4 (BGP-4)
- BGP Route Reflection

- BGP Communities Attribute
- BGP Support for Four-Octet Autonomous System (AS) Number Space
- The Accumulated IGP Metric Attribute for BGP
- 4-Octet AS Specific BGP Extended Community
- BGP Link Bandwidth Extended Community
- Use of BGP for Routing in Large-Scale Data Centers

## 2.1.5 IP Unicast Family

The BGP-4 allows to carry IPv4 specific information only. The basic BGP Multiprotocol extension brings *Unicast* Subsequent Address Family (SAFI) - intended to be used for IP unicast forwarding. The combination of IPv4 and IPv6 Address Family (AF) and Unicast SAFI is essential for Internet routing. The IPv4 Unicast routes are interchangeable with BGP-4 routes, as they can carry the same type of routing information.

### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *IP Unicast API*
  - *IPv4 Unicast Route*
  - *IPv6 Unicast Route*
- *Usage*
  - *IPv4 Unicast*
  - *IPv6 Unicast*
- *Programming*
  - *IPv4 Unicast*
  - *IPv6 Unicast*
- *References*

### Configuration

This section shows a way to enable IPv4 and IPv6 Unicast family in BGP speaker and peer configuration.

#### BGP Speaker

To enable IPv4 and IPv6 Unicast support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <global>
      <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
      </config>
      <afi-safis>
        <afi-safi>
          <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
            ↳x: IPV4-UNICAST</afi-safi-name>
          </afi-safi>
        <afi-safi>
          <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
            ↳x: IPV6-UNICAST</afi-safi-name>
          </afi-safi>
        </afi-safis>
      </global>
    </bgp>
  </protocol>
```

## BGP Peer

Here is an example for BGP peer configuration with enabled IPv4 and IPv6 Unicast family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <neighbor-address>192.0.2.1</neighbor-address>
  <afi-safis>
    <afi-safi>
      <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-
      ↳UNICAST</afi-safi-name>
      </afi-safi>
    <afi-safi>
      <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV6-
      ↳UNICAST</afi-safi-name>
      </afi-safi>
    </afi-safis>
  </neighbor>
```

## IP Unicast API

Following trees illustrate the BGP IP Unicast routes structures.

### IPv4 Unicast Route

```
: (ipv4-routes-case)
  +-ro ipv4-routes
    +-ro ipv4-route* [route-key path-id]
      +-ro route-key      string
      +-ro prefix        inet:ipv4-prefix
      +-ro path-id       path-id
      +-ro attributes
        +-ro origin
          | +-ro value    bgp-t:bgp-origin
        +-ro as-path
          | +-ro segments*
            | +-ro as-sequence*   inet:as-number
            | +-ro as-set*        inet:as-number
        +-ro (c-next-hop)?
          | +-:(ipv4-next-hop-case)
            | | +-ro ipv4-next-hop
              | | +-ro global?    inet:ipv4-address
          | +-:(ipv6-next-hop-case)
            | | +-ro ipv6-next-hop
              | | +-ro global?    inet:ipv6-address
            | | +-ro link-local?  inet:ipv6-address
          | +-:(empty-next-hop-case)
            | | +-ro empty-next-hop?    empty
        +-ro multi-exit-disc
          | +-ro med?     uint32
        +-ro local-pref
          | +-ro pref?    uint32
        +-ro atomic-aggregate!
        +-ro aggregator
          | +-ro as-number?    inet:as-number
          | +-ro network-address?  inet:ipv4-address
        +-ro communities*
          | +-ro as-number?    inet:as-number
          | +-ro semantics?    uint16
        +-ro extended-communities*
          | +-ro transitive?    boolean
          | +-ro (extended-community)?
            | | +-:(as-specific-extended-community-case)
              | | | +-ro as-specific-extended-community
                | | | +-ro global-administrator?  short-as-number
                | | | +-ro local-administrator?  binary
            | | +-:(inet4-specific-extended-community-case)
              | | | +-ro inet4-specific-extended-community
                | | | +-ro global-administrator?  inet:ipv4-address
                | | | +-ro local-administrator?  binary
            | | +-:(opaque-extended-community-case)
              | | | +-ro opaque-extended-community
                | | | +-ro value?    binary
            | | +-:(route-target-extended-community-case)
              | | | +-ro route-target-extended-community
```

(continues on next page)

(continued from previous page)

```

|   |   +-+ro global-administrator?    short-as-number
|   |   +-+ro local-administrator?    binary
|   +-:(route-origin-extended-community-case)
|   |   +-+ro route-origin-extended-community
|   |   +-+ro global-administrator?    short-as-number
|   |   +-+ro local-administrator?    binary
|   +-:(route-target-ipv4-case)
|   |   +-+ro route-target-ipv4
|   |   +-+ro global-administrator?    inet:ipv4-address
|   |   +-+ro local-administrator?    uint16
|   +-:(route-origin-ipv4-case)
|   |   +-+ro route-origin-ipv4
|   |   +-+ro global-administrator?    inet:ipv4-address
|   |   +-+ro local-administrator?    uint16
|   +-:(link-bandwidth-case)
|   |   +-+ro link-bandwidth-extended-community
|   |   +-+ro bandwidth    netc:bandwidth
|   +-:(as-4-generic-spec-extended-community-case)
|   |   +-+ro as-4-generic-spec-extended-community
|   |   +-+ro as-4-specific-common
|   |   +-+ro as-number          inet:as-number
|   |   +-+ro local-administrator  uint16
|   +-:(as-4-route-target-extended-community-case)
|   |   +-+ro as-4-route-target-extended-community
|   |   +-+ro as-4-specific-common
|   |   +-+ro as-number          inet:as-number
|   |   +-+ro local-administrator  uint16
|   +-:(as-4-route-origin-extended-community-case)
|   |   +-+ro as-4-route-origin-extended-community
|   |   +-+ro as-4-specific-common
|   |   +-+ro as-number          inet:as-number
|   |   +-+ro local-administrator  uint16
|   +-:(encapsulation-case)
|   |   +-+ro encapsulation-extended-community
|   |   +-+ro tunnel-type      encapsulation-tunnel-type
+-+ro originator-id
|   +-+ro originator?    inet:ipv4-address
+-+ro cluster-id
|   +-+ro cluster*     bgp-t:cluster-identifier
+-+ro aigp
|   +-+ro aigp-tlv
|   +-+ro metric?      netc:accumulated-igp-metric
+-+ro unrecognized-attributes* [type]
    +-+ro partial      boolean
    +-+ro transitive   boolean
    +-+ro type         uint8
    +-+ro value        binary

```

## IPv6 Unicast Route

```

:(ipv6-routes-case)
+-+ro ipv6-routes
  +-+ro ipv6-route* [route-key path-id]
    +-+ro route-key    string

```

(continues on next page)

(continued from previous page)

```
+--ro prefix          inet:ipv6-prefix
+--ro path-id         path-id
+--ro attributes
...
```

## Usage

### IPv4 Unicast

The IPv4 Unicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/ipv4-routes

**Method:** GET

**Response Body:**

```
<ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
  <ipv4-route>
    <route-key>193.0.2.1/32</route-key>
    <path-id>0</path-id>
    <prefix>193.0.2.1/32</prefix>
    <attributes>
      <as-path></as-path>
      <origin>
        <value>igp</value>
      </origin>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <ipv4-next-hop>
        <global>10.0.0.1</global>
      </ipv4-next-hop>
    </attributes>
  </ipv4-route>
</ipv4-routes>
```

### IPv6 Unicast

The IPv6 Unicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/ipv6-routes

**Method:** GET

**Response Body:**

```
<ipv6-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
  <ipv6-route>
    <route-key>2a02:b80:0:1::/64</route-key>
```

(continues on next page)

(continued from previous page)

```

<path-id>0</path-id>
<prefix>2a02:b80:0:1::/64</prefix>
<attributes>
  <as-path></as-path>
  <origin>
    <value>igp</value>
  </origin>
  <local-pref>
    <pref>200</pref>
  </local-pref>
  <ipv6-next-hop>
    <global>2a02:b80:0:2::1</global>
  </ipv6-next-hop>
</attributes>
</ipv6-route>
</ipv6-routes>

```

---

**Note:** IPv4/6 routes mapping to topology nodes is supported by BGP Topology Provider.

---

## Programming

### IPv4 Unicast

This examples show how to originate and remove IPv4 route via programmable RIB. Make sure the *Application Peer* is configured first.

---

**Note:** IPv4 Route Key must be equal to prefix.

---

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<ipv4-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
  <route-key>10.0.0.11/32</route-key>
  <prefix>10.0.0.11/32</prefix>
  <path-id>0</path-id>
  <attributes>
    <as-path></as-path>
    <origin>
      <value>igp</value>
    </origin>
    <local-pref>
      <pref>100</pref>
    </local-pref>
    <ipv4-next-hop>
      <global>10.11.1.1</global>
    </ipv4-next-hop>
  </attributes>
</ipv4-route>

```

(continues on next page)

(continued from previous page)

```
</ipv4-next-hop>
</attributes>
</ipv4-route>
```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv4-routes/ipv4-route/10.0.0.11%2F32/0

**Method:** DELETE

## IPv6 Unicast

This examples show how to originate and remove IPv6 route via programmable RIB:

**Note:** IPv6 Route Key must be equal to prefix.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv6-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv6-routes

**Method:** POST

**Content-Type:** application/xml

### Request Body:

```
<ipv6-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
    <route-key>2001:db8:30::3/128</route-key>
    <prefix>2001:db8:30::3/128</prefix>
    <path-id>0</path-id>
    <attributes>
        <ipv6-next-hop>
            <global>2001:db8:1::6</global>
        </ipv6-next-hop>
        <as-path/>
        <origin>
            <value>igp</value>
        </origin>
        <local-pref>
            <pref>100</pref>
        </local-pref>
    </attributes>
</ipv6-route>
```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv6-address-family/bgp-types:unicast-subsequent-address-family/bgp-inet:ipv6-routes/ipv6-route/2001:db8:30::3%2F128/0

**Method:** DELETE

## References

- Multiprotocol Extensions for BGP-4

### 2.1.6 IP Labeled Unicast Family

The BGP Labeled Unicast (BGP-LU) Multiprotocol extension is used to distribute a MPLS label that is mapped to a particular route. It can be used to advertise a MPLS transport path between IGP regions and Autonomous Systems. Also, BGP-LU can help to solve the Inter-domain traffic-engineering problem and can be deployed in large-scale data centers along with MPLS and Spring. In addition, IPv6 Labeled Unicast can be used to interconnect IPv6 islands over IPv4/MPLS networks using 6PE.

#### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *IP Labeled Unicast API*
  - *IPv4 Labeled Unicast Route*
  - *IPv6 Labeled Unicast Route*
- *Usage*
- *Programming*
  - *IPv4 Labeled*
  - *IPv6 Labeled*
- *References*

## Configuration

This section shows a way to enable IPv4 and IPv6 Labeled Unicast family in BGP speaker and peer configuration.

### BGP Speaker

To enable IPv4 and IPv6 Labeled Unicast support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:openconfig-extensions">
```

(continues on next page)

(continued from previous page)

```

<global>
    <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
    </config>
    <afi-safis>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
                x:IPV4-LABELLED-UNICAST</afi-safi-name>
            </afi-safi>
            <afi-safi>
                <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
                    x:IPV6-LABELLED-UNICAST</afi-safi-name>
                </afi-safi>
            </afi-safis>
        </global>
    </bgp>
</protocol>

```

## BGP Peer

Here is an example for BGP peer configuration with enabled IPv4 and IPv6 Labeled Unicast family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <neighbor-address>192.0.2.1</neighbor-address>
    <afi-safis>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-
                x:LABELLED-UNICAST</afi-safi-name>
            </afi-safi>
            <afi-safi>
                <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV6-
                x:LABELLED-UNICAST</afi-safi-name>
            </afi-safi>
        </afi-safis>
    </neighbor>

```

## IP Labeled Unicast API

Following trees illustrate the BGP IP Labeled Unicast routes structures.

## IPv4 Labeled Unicast Route

```
: (labeled-unicast-routes-case)
++--ro labeled-unicast-routes
    +--ro labeled-unicast-route* [route-key path-id]
        +--ro route-key string
        +--ro label-stack*
            | +--ro label-value? netc:mpls-label
        +--ro prefix?         inet:ip-prefix
        +--ro path-id         path-id
        +--ro attributes
        ...

```

## IPv6 Labeled Unicast Route

```
: (labeled-unicast-ipv6-routes-case)
  +-ro labeled-unicast-ipv6-routes
    +-ro labeled-unicast-route* [route-key path-id]
      +-ro route-key          string
      +-ro label-stack*
        | +-ro label-value?   netc:mpls-label
      +-ro prefix?           inet:ip-prefix
      +-ro path-id           path-id
      +-ro attributes
      ...

```

## Usage

The IPv4 Labeled Unicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/  
**bgp-types:** ipv4-address-family/bgp-labeled-unicast:labeled-unicast-subsequent-address-family  
**bgp-labeled-unicast:labeled-unicast-routes**

#### **Method:** GET

### **Response Body:**

```
<labeled-unicast-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-labeled-unicast
← ">
  <labeled-unicast-route>
    <path-id>0</path-id>
    <route-key>MAA+gRQAAA==</route-key>
    <attributes>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <ipv4-next-hop>
        <global>200.10.0.101</global>
      </ipv4-next-hop>
      <as-path></as-path>
      <origin>
        <value>igp</value>
      </origin>
```

(continues on next page)

(continued from previous page)

```

</attributes>
<label-stack>
    <label-value>1000</label-value>
</label-stack>
<prefix>20.0.0.0/24</prefix>
</labeled-unicast-route>
</labeled-unicast-routes>

```

## Programming

### IPv4 Labeled

This examples show how to originate and remove IPv4 labeled route via programmable RIB. Make sure the *Application Peer* is configured first.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-labeled-unicast:labeled-unicast-subsequent-address-family/bgp-labeled-unicast:labeled-unicast-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<labeled-unicast-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-labeled-unicast
↪">
    <route-key>label1</route-key>
    <prefix>1.1.1.1/32</prefix>
    <path-id>0</path-id>
    <label-stack>
        <label-value>800322</label-value>
    </label-stack>
    <attributes>
        <ipv4-next-hop>
            <global>199.20.160.41</global>
        </ipv4-next-hop>
        <origin>
            <value>igp</value>
        </origin>
        <as-path/>
        <local-pref>
            <pref>100</pref>
        </local-pref>
    </attributes>
</labeled-unicast-route>

```

---

In addition, BGP-LU Spring extension allows to attach BGP Prefix SID attribute to the route, in order to signal the BGP-Prefix-SID, where the SR is applied to MPLS dataplane.

```

<bgp-prefix-sid>
    <bgp-prefix-sid-tlvs>
        <label-index-tlv xmlns="urn:opendaylight:params:xml:ns:yang:bgp-labeled-
↪unicast">322</label-index-tlv>

```

(continues on next page)

(continued from previous page)

```

</bgp-prefix-sid-tlvs>
<bgp-prefix-sid-tlvs>
  <srgb-value xmlns="urn:opendaylight:params:xml:ns:yang:bgp-labeled-unicast">
    <base>800000</base>
    <range>4095</range>
  </srgb-value>
</bgp-prefix-sid-tlvs>
</bgp-prefix-sid>

```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-labeled-unicast:labeled-unicast-subsequent-address-family/bgp-labeled-unicast:labeled-unicast-routes/bgp-labeled-unicast:labeled-unicast-route/label1/0

**Method:** DELETE

## IPv6 Labeled

This examples show how to originate and remove IPv6 labeled route via programmable RIB.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-labeled-unicast:labeled-unicast-subsequent-address-family/bgp-labeled-unicast:labeled-unicast-ipv6-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<labeled-unicast-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-labeled-unicast">
  <route-key>label1</route-key>
  <prefix>2001:db8:30::3/128</prefix>
  <path-id>0</path-id>
  <label-stack>
    <label-value>123</label-value>
  </label-stack>
  <attributes>
    <ipv6-next-hop>
      <global>2003:4:5:6::7</global>
    </ipv6-next-hop>
    <origin>
      <value>igp</value>
    </origin>
    <as-path/>
    <local-pref>
      <pref>100</pref>
    </local-pref>
  </attributes>
</labeled-unicast-route>

```

To remove the route added above, following request can be used:

**URL:**

/restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-labeled-unicast:labeled-unicast-subsequent-address-family/bgp-labeled-unicast:labeled-unicast-ipv6-routes/bgp-labeled-unicast:labeled-unicast-route/label1/0

**Method:** DELETE**References**

- Carrying Label Information in BGP-4
- Segment Routing Prefix SID extensions for BGP
- Connecting IPv6 Islands over IPv4 MPLS Using IPv6 Provider Edge Routers (6PE)
- BGP-Prefix Segment in large-scale data centers
- Egress Peer Engineering using BGP-LU

## 2.1.7 IP L3VPN Family

The BGP/MPLS IP Virtual Private Networks (BGP L3VPN) Multiprotocol extension can be used to exchange particular VPN (customer) routes among the provider's routers attached to that VPN. Also, routes are distributed to specific VPN remote sites.

**Contents**

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *IP L3VPN API*
  - *IPv4 L3VPN Unicast Route*
  - *IPv6 L3VPN Unicast Route*
  - *IPv4 L3VPN Multicast Route*
  - *IPv6 L3VPN Multicast Route*
- *Usage*
  - *IPv4 L3VPN Unicast*
  - *IPv6 L3VPN Unicast*
  - *IPv4 L3VPN Multicast*
  - *IPv6 L3VPN Multicast*
- *Programming*
- *References*

### Configuration

This section shows a way to enable IPv4 and IPv6 L3VPN family in BGP speaker and peer configuration.

## BGP Speaker

To enable IPv4 and IPv6 L3VPN support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <global>
      <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
      </config>
      <afi-safis>
        <afi-safi>
          <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
            ↳x:L3VPN-IPV4-UNICAST</afi-safi-name>
          </afi-safi>
          <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
              ↳x:L3VPN-IPV6-UNICAST</afi-safi-name>
            </afi-safi>
            <afi-safi>
              <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
                ↳x:L3VPN-IPV4-MULTICAST</afi-safi-name>
              </afi-safi>
              <afi-safi>
                <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
                  ↳x:L3VPN-IPV6-MULTICAST</afi-safi-name>
                </afi-safi>
              </afi-safis>
            </global>
          </bgp>
    </protocol>
```

## BGP Peer

Here is an example for BGP peer configuration with enabled IPv4 and IPv6 L3VPN family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <neighbor-address>192.0.2.1</neighbor-address>
  <afi-safis>
    <afi-safi>
      <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:L3VPN-
      ↵IPV4-UNICAST</afi-safi-name>
      </afi-safi>
      <afi-safi>
        <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:L3VPN-
        ↵IPV6-UNICAST</afi-safi-name>
        </afi-safi>
      </afi-safis>
    </neighbor>
```

## IP L3VPN API

Following trees illustrate the BGP IP L3VPN routes structures.

### IPv4 L3VPN Unicast Route

```
: (vpn-ipv4-routes-case)
  +-+ro vpn-ipv4-routes
    +-+ro vpn-route* [route-key path-id]
      +-+ro route-key          string
      +-+ro path-id            path-id
      +-+ro label-stack*
        | +-+ro label-value?   netc:mpls-label
        +-+ro prefix?          inet:ip-prefix
        +-+ro path-id?          path-id
        +-+ro route-distinguisher? bgp-t:route-distinguisher
        +-+ro attributes
      ...
    ...
```

### IPv6 L3VPN Unicast Route

```
: (vpn-ipv6-routes-case)
  +-+ro vpn-ipv6-routes
    +-+ro vpn-route* [route-key path-id]
      +-+ro route-key          string
      +-+ro path-id            path-id
      +-+ro label-stack*
        | +-+ro label-value?   netc:mpls-label
        +-+ro prefix?          inet:ip-prefix
        +-+ro path-id?          path-id
        +-+ro route-distinguisher? bgp-t:route-distinguisher
        +-+ro attributes
      ...
    ...
```

## IPv4 L3VPN Multicast Route

```
: (l3vpn-mcast-routes-ipv4-case)
  +-ro l3vpn-mcast-routes-ipv4
    +-ro l3vpn-mcast-route* [route-key path-id]
      +-ro prefix?          inet:ip-prefix
      +-ro route-distinguisher?  bgp-t:route-distinguisher
```

## IPv6 L3VPN Multicast Route

```
: (l3vpn-mcast-routes-ipv6-case)
  +-ro l3vpn-mcast-routes-ipv6
    +-ro l3vpn-mcast-route* [route-key path-id]
      +-ro prefix?          inet:ip-prefix
      +-ro route-distinguisher?  bgp-t:route-distinguisher
```

## Usage

### IPv4 L3VPN Unicast

The IPv4 L3VPN Unicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:mpls-labeled-vpn-subsequent-address-family/bgp-vpn-ipv4:vpn-ipv4-routes

**Method:** GET

**Response Body:**

```
<vpn-ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-vpn-ipv4">
  <vpn-route>
    <path-id>0</path-id>
    <route-key>cAXdYQABrBAALABLcGII</route-key>
    <label-stack>
      <label-value>24022</label-value>
    </label-stack>
    <attributes>
      <extended-communities>
        <transitive>true</transitive>
        <route-target-extended-community>
          <global-administrator>65000</global-administrator>
          <local-administrator>AAAAZQ==</local-administrator>
        </route-target-extended-community>
      </extended-communities>
      <origin>
        <value>igp</value>
      </origin>
      <as-path></as-path>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <ipv4-next-hop>
        <global>127.16.0.44</global>
```

(continues on next page)

(continued from previous page)

```
</ipv4-next-hop>
</attributes>
<route-distinguisher>172.16.0.44:101</route-distinguisher>
<prefix>10.2.34.0/24</prefix>
</vpn-route>
</vpn-ipv4-routes>
```

## IPv6 L3VPN Unicast

The IPv6 L3VPN Unicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv6-address-family/bgp-types:mpls-labeled-vpn-subsequent-address-family/bgp-vpn-ipv6:vpn-ipv6-routes

**Method:** GET

### Response Body:

```
<vpn-ipv6-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-vpn-ipv6">
  <vpn-route>
    <path-id>0</path-id>
    <route-key>mAXdcQABrBAALAB1KgILgAAAAE=</route-key>
    <label-stack>
      <label-value>24023</label-value>
    </label-stack>
    <attributes>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <extended-communities>
        <route-target-extended-community>
          <global-administrator>65000</global-administrator>
          <local-administrator>AAAAZQ==</local-administrator>
        </route-target-extended-community>
        <transitive>true</transitive>
      </extended-communities>
      <ipv6-next-hop>
        <global>2a02:b80:0:2::1</global>
      </ipv6-next-hop>
      <origin>
        <value>igp</value>
      </origin>
      <as-path></as-path>
    </attributes>
    <route-distinguisher>172.16.0.44:101</route-distinguisher>
    <prefix>2a02:b80:0:1::/64</prefix>
  </vpn-route>
</vpn-ipv6-routes>
```

## IPv4 L3VPN Multicast

The IPv4 L3VPN Multicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:mcast-mpls-labeled-vpn-subsequent-address-family/bgp-l3vpn-mcast:l3vpn-mcast-routes

**Method:** GET

**Response Body:**

```
<13vpn-mcast-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp:13vpn:mcast">
  <13vpn-mcast-route>
    <path-id>0</path-id>
    <route-key>mAXdcQABrBAALAB1KgILgAAAAAE=</route-key>
    <route-distinguisher>172.16.0.44:101</route-distinguisher>
    <prefix>10.2.34.0/24</prefix>
    <attributes>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <extended-communities>
        <transitive>true</transitive>
        <vrf-route-import-extended-community>
          <inet4-specific-extended-community-common>
            <global-administrator>10.0.0.1</global-administrator>
            <local-administrator>123=</local-administrator>
          </inet4-specific-extended-community-common>
        </vrf-route-import-extended-community>
      </extended-communities>
      <ipv4-next-hop>
        <global>127.16.0.44</global>
      </ipv4-next-hop>
      <origin>
        <value>igp</value>
      </origin>
      <as-path></as-path>
    </attributes>
  </13vpn-mcast-route>
</13vpn-mcast-routes>
```

## IPv6 L3VPN Multicast

The IPv4 L3VPN Multicast table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv6-address-family/bgp-types:mcast-mpls-labeled-vpn-subsequent-address-family/bgp-l3vpn-mcast:l3vpn-mcast-routes

**Method:** GET

**Response Body:**

```
<13vpn-mcast-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp:13vpn:mcast">
  <13vpn-mcast-route>
    <path-id>0</path-id>
    <route-key>mAXdcQABrBAALAB1KgILgAAAAAE=</route-key>
    <route-distinguisher>172.16.0.44:101</route-distinguisher>
    <prefix>2a02:b80:0:1::/64</prefix>
    <attributes>
      <local-pref>
```

(continues on next page)

(continued from previous page)

```

<pref>100</pref>
</local-pref>
<extended-communities>
    <transitive>true</transitive>
    <vrf-route-import-extended-community>
        <inet4-specific-extended-community-common>
            <global-administrator>10.0.0.1</global-administrator>
            <local-administrator>123=</local-administrator>
        </inet4-specific-extended-community-common>
    </vrf-route-import-extended-community>
</extended-communities>
<ipv6-next-hop>
    <global>2a02:b80:0:2::1</global>
</ipv6-next-hop>
<origin>
    <value>igp</value>
</origin>
<as-path></as-path>
</attributes>
</l3vpn-mcast-route>
</l3vpn-mcast-routes>

```

## Programming

This examples show how to originate and remove IPv4 L3VPN Unicast route via programmable RIB. Make sure the *Application Peer* is configured first.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:mpls-labeled-vpn-subsequent-address-family/bgp-vpn-ipv4:vpn-ipv4-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<vpn-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-vpn-ipv4">
    <path-id>0</path-id>
    <route-key>vpn1</route-key>
    <label-stack>
        <label-value>123</label-value>
    </label-stack>
    <route-distinguisher>429496729:1</route-distinguisher>
    <prefix>2.2.2.2/32</prefix>
    <attributes>
        <ipv4-next-hop>
            <global>199.20.166.41</global>
        </ipv4-next-hop>
        <as-path/>
        <origin>
            <value>igp</value>
        </origin>
        <extended-communities>
            <route-target-extended-community>
                <global-administrator>65000</global-administrator>

```

(continues on next page)

(continued from previous page)

```

<local-administrator>AAAAZQ==</local-administrator>
</route-target-extended-community>
<transitive>true</transitive>
</extended-communities>
</attributes>
</vpn-route>

```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-types:mpls-labeled-vpn-subsequent-address-family/bgp-vpn-ipv4:vpn-ipv4-routes/vpn-route/vpn1/0

**Method:** DELETE

## References

- BGP/MPLS IP Virtual Private Networks (VPNs)
- BGP-MPLS IP Virtual Private Network (VPN) Extension for IPv6 VPN
- BGP/MPLS VPN Virtual PE

## 2.1.8 Link-State Family

The BGP Link-State (BGP-LS) Multiprotocol extension allows to distribute Link-State and Traffic Engineering (TE) information. This information is typically distributed by IGP routing protocols within the network, limiting LSDB or TED visibility to the IGP area. The BGP-LS-enabled routers are capable of collecting such information from networks (multiple IGP areas, inter-AS) and sharing with external components (i.e. OpenDaylight BGP). The information is applicable in ALTO servers and PCEs, as both need to gather information about topologies. In addition, link-state information is extended to carry segment information (Spring).

### Contents

- *Configuration*
  - *BGP Speaker*
  - *Linkstate path attribute*
  - *BGP Peer*
- *Link-State Route API*
- *Usage*
- *References*

### Configuration

This section shows a way to enable IPv4 and IPv6 Labeled Unicast family in BGP speaker and peer configuration.

## BGP Speaker

To enable BGP-LS support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:openconfig-extensions">
    <global>
      <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
      </config>
      <afi-safis>
        <afi-safi>
          <afi-safi-name>LINKSTATE</afi-safi-name>
        </afi-safi>
      </afi-safis>
    </global>
  </bgp>
</protocol>
```

## Linkstate path attribute

IANA allocation for BGP-LS path attribute is TYPE 29. Some older BGP-LS implementations might still require earliest assigned allocation TYPE 99. To use TYPE = 99, you need to set value bellow to false.

**URL:** /restconf/config/bgp-linkstate-app-config:bgp-linkstate-app-config

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
<bgp-linkstate-app-config xmlns=
  "urn:opendaylight:params:xml:ns:yang:controller:bgp:linkstate-app-config">
  <iota-linkstate-attribute-type>false</iota-linkstate-attribute-type>
</bgp-linkstate-app-config>
```

## BGP Peer

Here is an example for BGP peer configuration with enabled BGP-LS family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <neighbor-address>192.0.2.1</neighbor-address>
  <afi-safis>
    <afi-safi>
      <afi-safi-name>LINKSTATE</afi-safi-name>
    </afi-safi>
  </afi-safis>
</neighbor>
```

## Link-State Route API

Following tree illustrate the BGP Link-State route structure.

```
: (linkstate-routes-case)
  +-+ro linkstate-routes
    +-+ro linkstate-route* [route-key path-id]
      +-+ro route-key                      string
      +-+ro path-id                        path-id
      +-+ro protocol-id                   protocol-id
      +-+ro identifier                     identifier
      +-+ro (object-type)?
        |  +-+: (node-case)
        |  |  +-+ro node-descriptors
        |  |  +-+ro as-number?            inet:as-number
        |  |  +-+ro area-id?             area-identifier
        |  |  +-+ro domain-id?           domain-identifier
        |  |  +-+ro (c-router-identifier)?
        |  |  |  +-+: (isis-node-case)
        |  |  |  |  +-+ro isis-node
        |  |  |  |  +-+ro iso-system-id   netc:iso-system-identifier
        |  |  |  +-+: (isis-pseudonode-case)
        |  |  |  |  +-+ro isis-pseudonode
        |  |  |  |  +-+ro is-is-router-identifier
        |  |  |  |  |  +-+ro iso-system-id   netc:iso-system-identifier
        |  |  |  |  +-+ro psn                uint8
        |  |  |  +-+: (ospf-node-case)
        |  |  |  |  +-+ro ospf-node
        |  |  |  |  |  +-+ro ospf-router-id  uint32
        |  |  |  +-+: (ospf-pseudonode-case)
        |  |  |  |  +-+ro ospf-pseudonode
        |  |  |  |  +-+ro ospf-router-id  uint32
        |  |  |  |  +-+ro lan-interface     ospf-interface-identifier
        |  |  +-+: (link-case)
        |  |  |  +-+ro local-node-descriptors
        |  |  |  |  +-+ro as-number?          inet:as-number
        |  |  |  |  +-+ro area-id?           area-identifier
        |  |  |  |  +-+ro domain-id?         domain-identifier
        |  |  |  |  +-+ro (c-router-identifier)?
        |  |  |  |  |  +-+: (isis-node-case)
        |  |  |  |  |  |  +-+ro isis-node
        |  |  |  |  |  |  |  +-+ro iso-system-id   netc:iso-system-identifier
        |  |  |  |  |  |  +-+: (isis-pseudonode-case)
        |  |  |  |  |  |  |  +-+ro isis-pseudonode
```

(continues on next page)

(continued from previous page)

```

| | | | |     +-ro is-is-router-identifier
| | | | |     |   +-ro iso-system-id      netc:iso-system-identifier
| | | | |     +-ro psn                      uint8
| | | | +-+: (ospf-node-case)
| | | | |   +-ro ospf-node
| | | | |     +-ro ospf-router-id    uint32
| | | | +-+: (ospf-pseudonode-case)
| | | | |   +-ro ospf-pseudonode
| | | | |     +-ro ospf-router-id    uint32
| | | | |     +-ro lan-interface    ospf-interface-identifier
| | | | +-ro bgp-router-id?      inet:ipv4-address
| | | +-ro member-asn?        inet:as-number
| | +-ro remote-node-descriptors
| | | +-ro as-number?        inet:as-number
| | | +-ro area-id?         area-identifier
| | | +-ro domain-id?       domain-identifier
| | | +-ro (c-router-identifier)?
| | | | +-+: (isis-node-case)
| | | | |   +-ro isis-node
| | | | |     +-ro iso-system-id      netc:iso-system-identifier
| | | | +-+: (isis-pseudonode-case)
| | | | |   +-ro isis-pseudonode
| | | | |     +-ro is-is-router-identifier
| | | | |     |   +-ro iso-system-id      netc:iso-system-identifier
| | | | |     +-ro psn                      uint8
| | | | +-+: (ospf-node-case)
| | | | |   +-ro ospf-node
| | | | |     +-ro ospf-router-id    uint32
| | | | +-+: (ospf-pseudonode-case)
| | | | |   +-ro ospf-pseudonode
| | | | |     +-ro ospf-router-id    uint32
| | | | |     +-ro lan-interface    ospf-interface-identifier
| | | +-ro bgp-router-id?      inet:ipv4-address
| | +-ro member-asn?        inet:as-number
| +-ro link-descriptors
| | +-ro link-local-identifier?  uint32
| | +-ro link-remote-identifier? uint32
| | +-ro ipv4-interface-address? ipv4-interface-identifier
| | +-ro ipv6-interface-address? ipv6-interface-identifier
| | +-ro ipv4-neighbor-address? ipv4-interface-identifier
| | +-ro ipv6-neighbor-address? ipv6-interface-identifier
| | +-ro multi-topology-id?    topology-identifier
| +-+: (prefix-case)
| | +-ro advertising-node-descriptors
| | | +-ro as-number?        inet:as-number
| | | +-ro area-id?         area-identifier
| | | +-ro domain-id?       domain-identifier
| | | +-ro (c-router-identifier)?
| | | | +-+: (isis-node-case)
| | | | |   +-ro isis-node
| | | | |     +-ro iso-system-id      netc:iso-system-identifier
| | | | +-+: (isis-pseudonode-case)
| | | | |   +-ro isis-pseudonode
| | | | |     +-ro is-is-router-identifier
| | | | |     |   +-ro iso-system-id      netc:iso-system-identifier
| | | | |     +-ro psn                      uint8
| | | | +-+: (ospf-node-case)

```

(continues on next page)

(continued from previous page)

```

| | | | +--ro ospf-node
| | | | | +--ro ospf-router-id      uint32
| | | | +--:(ospf-pseudonode-case)
| | | | | +--ro ospf-pseudonode
| | | | | | +--ro ospf-router-id      uint32
| | | | | | +--ro lan-interface      ospf-interface-identifier
| | | | +--ro prefix-descriptors
| | | | | +--ro multi-topology-id?    topology-identifier
| | | | | +--ro ospf-route-type?      ospf-route-type
| | | | | +--ro ip-reachability-information?  inet:ip-prefix
| | | +--:(te-lsp-case)
| | | | +--ro (address-family)?
| | | | | +--:(ipv4-case)
| | | | | | +--ro ipv4-tunnel-sender-address  inet:ipv4-address
| | | | | | +--ro ipv4-tunnel-endpoint-address  inet:ipv4-address
| | | | | +--:(ipv6-case)
| | | | | | +--ro ipv6-tunnel-sender-address  inet:ipv6-address
| | | | | | +--ro ipv6-tunnel-endpoint-address  inet:ipv6-address
| | | | +--ro tunnel-id?            rsvp:tunnel-id
| | | | +--ro lsp-id?              rsvp:lsp-id
| | +--ro attributes
| | | +--ro (link-state-attribute)?
| | | +--:(node-attributes-case)
| | | | +--ro node-attributes
| | | | | +--ro topology-identifier*   topology-identifier
| | | | | +--ro node-flags?          node-flag-bits
| | | | | +--ro isis-area-id*     isis-area-identifier
| | | | | +--ro dynamic-hostname?  string
| | | | | +--ro ipv4-router-id?    ipv4-router-identifier
| | | | | +--ro ipv6-router-id?    ipv6-router-identifier
| | | | | +--ro sr-capabilities
| | | | | | +--ro mpls-ipv4?      boolean
| | | | | | +--ro mpls-ipv6?      boolean
| | | | | | +--ro sr-ipv6?      boolean
| | | | | | +--ro range-size?    uint32
| | | | | | +--ro (sid-label-index)?
| | | | | | | +--:(local-label-case)
| | | | | | | | +--ro local-label?    netc:mpls-label
| | | | | | | +--:(ipv6-address-case)
| | | | | | | | +--ro ipv6-address?  inet:ipv6-address
| | | | | | | +--:(sid-case)
| | | | | | | | +--ro sid?        uint32
| | | | | +--ro sr-algorithm
| | | | | | +--ro algorithms*    algorithm
| | | +--:(link-attributes-case)
| | | | +--ro link-attributes
| | | | | +--ro local-ipv4-router-id?  ipv4-router-identifier
| | | | | +--ro local-ipv6-router-id?  ipv6-router-identifier
| | | | | +--ro remote-ipv4-router-id?  ipv4-router-identifier
| | | | | +--ro remote-ipv6-router-id?  ipv6-router-identifier
| | | | | +--ro mpls-protocol?      mpls-protocol-mask
| | | | | +--ro te-metric?        netc:te-metric
| | | | | +--ro metric?          netc:metric
| | | | | +--ro shared-risk-link-groups*  rsvp:srlg-id
| | | | | +--ro link-name?        string
| | | | | +--ro max-link-bandwidth?  netc:bandwidth
| | | | | +--ro max-reservable-bandwidth?  netc:bandwidth

```

(continues on next page)

(continued from previous page)

```

|   +-+ro unreserved-bandwidth* [priority]
|   |   +-+ro priority      uint8
|   |   +-+ro bandwidth?    netc:bandwidth
|   +-+ro link-protection?          link-protection-type
|   +-+ro admin-group?            administrative-group
|   +-+ro sr-adj-ids*
|   |   +-+ro (flags)?
|   |   |   +-+: (ospf-adj-flags-case)
|   |   |   |   +-+ro backup?        boolean
|   |   |   |   +-+ro set?         boolean
|   |   |   +-+: (isis-adj-flags-case)
|   |   |   |   +-+ro backup?        boolean
|   |   |   |   +-+ro set?         boolean
|   |   |   +-+ro address-family?  boolean
|   |   +-+ro weight?           weight
|   +-+ro (sid-label-index)?
|   |   +-+: (local-label-case)
|   |   |   +-+ro local-label?   netc:mpls-label
|   |   +-+: (ipv6-address-case)
|   |   |   +-+ro ipv6-address?  inet:ipv6-address
|   |   +-+: (sid-case)
|   |   |   +-+ro sid?         uint32
|   +-+ro sr-lan-adj-ids*
|   |   +-+ro (flags)?
|   |   |   +-+: (ospf-adj-flags-case)
|   |   |   |   +-+ro backup?        boolean
|   |   |   |   +-+ro set?         boolean
|   |   |   +-+: (isis-adj-flags-case)
|   |   |   |   +-+ro backup?        boolean
|   |   |   |   +-+ro set?         boolean
|   |   |   +-+ro address-family?  boolean
|   |   +-+ro weight?           weight
|   +-+ro iso-system-id?       netc:iso-system-identifier
|   +-+ro neighbor-id?        inet:ipv4-address
|   +-+ro (sid-label-index)?
|   |   +-+: (local-label-case)
|   |   |   +-+ro local-label?   netc:mpls-label
|   |   +-+: (ipv6-address-case)
|   |   |   +-+ro ipv6-address?  inet:ipv6-address
|   |   +-+: (sid-case)
|   |   |   +-+ro sid?         uint32
|   +-+ro peer-node-sid
|   |   +-+ro weight?           weight
|   +-+ro (sid-label-index)?
|   |   +-+: (local-label-case)
|   |   |   +-+ro local-label?   netc:mpls-label
|   |   +-+: (ipv6-address-case)
|   |   |   +-+ro ipv6-address?  inet:ipv6-address
|   |   +-+: (sid-case)
|   |   |   +-+ro sid?         uint32
|   +-+ro peer-adj-sid
|   |   +-+ro weight?           weight
|   +-+ro (sid-label-index)?
|   |   +-+: (local-label-case)
|   |   |   +-+ro local-label?   netc:mpls-label
|   |   +-+: (ipv6-address-case)
|   |   |   +-+ro ipv6-address?  inet:ipv6-address

```

(continues on next page)

(continued from previous page)

```

|   |   +---:(sid-case)
|   |   |   +-+ro sid?          uint32
|   +-+ro peer-set-sids*
|   |   +-+ro weight?        weight
|   |   +-+ro (sid-label-index)?
|   |   |   +---:(local-label-case)
|   |   |   |   +-+ro local-label?    netc:mpls-label
|   |   |   +---:(ipv6-address-case)
|   |   |   |   +-+ro ipv6-address?  inet:ipv6-address
|   |   |   +---:(sid-case)
|   |   |   |   +-+ro sid?          uint32
+---:(prefix-attributes-case)
|   +-+ro prefix-attributes
|   |   +-+ro igrp-bits
|   |   |   x--ro up-down?      bits
|   |   |   +-+ro is-is-up-down? boolean
|   |   |   +-+ro ospf-no-unicast? boolean
|   |   |   +-+ro ospf-local-address? boolean
|   |   |   +-+ro ospf-propagate-nssa? boolean
|   +-+ro route-tags*
|   +-+ro extended-tags*
|   +-+ro prefix-metric?
|   +-+ro ospf-forwarding-address?  inet:ip-address
|   +-+ro sr-prefix
|   |   +-+ro (flags)?
|   |   |   +---:(isis-prefix-flags-case)
|   |   |   |   +-+ro no-php?        boolean
|   |   |   |   +-+ro explicit-null?  boolean
|   |   |   |   +-+ro readvertisement? boolean
|   |   |   |   +-+ro node-sid?      boolean
|   |   |   +---:(ospf-prefix-flags-case)
|   |   |   |   +-+ro no-php?        boolean
|   |   |   |   +-+ro explicit-null?  boolean
|   |   |   |   +-+ro mapping-server? boolean
|   |   +-+ro algorithm?        algorithm
|   |   +-+ro (sid-label-index)?
|   |   |   +---:(local-label-case)
|   |   |   |   +-+ro local-label?    netc:mpls-label
|   |   |   +---:(ipv6-address-case)
|   |   |   |   +-+ro ipv6-address?  inet:ipv6-address
|   |   |   +---:(sid-case)
|   |   |   |   +-+ro sid?          uint32
|   +-+ro ipv6-sr-prefix
|   |   +-+ro algorithm?        algorithm
|   +-+ro sr-range
|   |   +-+ro inter-area?      boolean
|   |   +-+ro range-size?       uint16
|   |   +-+ro sub-tlvs*
|   |   |   +-+ro (range-sub-tlv)?
|   |   |   |   +---:(binding-sid-tlv-case)
|   |   |   |   |   +-+ro weight?        weight
|   |   |   |   |   +-+ro (flags)?
|   |   |   |   |   |   +---:(isis-binding-flags-case)
|   |   |   |   |   |   |   +-+ro address-family?  boolean
|   |   |   |   |   |   |   +-+ro mirror-context?  boolean
|   |   |   |   |   |   |   +-+ro spread-tlv?      boolean
|   |   |   |   |   |   |   +-+ro leaked-from-level-2? boolean

```

(continues on next page)

(continued from previous page)

				+--ro attached-flag?	boolean
				+--:(ospf-binding-flags-case)	
				+--ro mirroring?	boolean
			+--ro binding-sub-tlvs*		
				+--ro (binding-sub-tlv) ?	
				+--:(prefix-sid-case)	
				+--ro (flags)?	
				+--:(isis-prefix-flags-case)	
				+--ro no-php?	boolean
				+--ro explicit-null?	boolean
				+--ro readvertisement?	boolean
				+--ro node-sid?	boolean
				+--:(ospf-prefix-flags-case)	
				+--ro no-php?	boolean
				+--ro explicit-null?	boolean
				+--ro mapping-server?	boolean
				+--ro algorithm?	algorithm
				+--ro (sid-label-index)?	
				+--:(local-label-case)	
				+--ro local-label?	netc:mpls-
↳label					
				+--:(ipv6-address-case)	
				+--ro ipv6-address?	inet:ipv6-
↳address					
				+--:(sid-case)	
				+--ro sid?	uint32
			+--:(ipv6-prefix-sid-case)		
			+--ro algorithm?	algorithm	
			+--:(sid-label-case)		
			+--ro (sid-label-index)?		
			+--:(local-label-case)		
			+--ro local-label?	netc:mpls-	
↳label					
				+--:(ipv6-address-case)	
				+--ro ipv6-address?	inet:ipv6-
↳address					
				+--:(sid-case)	
				+--ro sid?	uint32
			+--:(ero-metric-case)		
			+--ro ero-metric?	netc:te-metric	
			+--:(ipv4-ero-case)		
			+--ro loose?	boolean	
			+--ro address	inet:ipv4-address	
			+--:(ipv6-ero-case)		
			+--ro loose?	boolean	
			+--ro address	inet:ipv6-address	
			+--:(unnumbered-interface-id-ero-case)		
			+--ro loose?	boolean	
			+--ro router-id?	uint32	
			+--ro interface-id?	uint32	
			+--:(ipv4-ero-backup-case)		
			+--ro loose?	boolean	
			+--ro address	inet:ipv4-address	
			+--:(ipv6-ero-backup-case)		
			+--ro loose?	boolean	
			+--ro address	inet:ipv6-address	
			+--:(unnumbered-interface-id-backup-ero-case)		

(continues on next page)

(continued from previous page)

			+--ro loose?	boolean
			+--ro router-id?	uint32
			+--ro interface-id?	uint32
		+--:(prefix-sid-tlv-case)		
		+--ro (flags)?		
		+--:(isis-prefix-flags-case)		
		+--ro no-php?	boolean	
		+--ro explicit-null?	boolean	
		+--ro readvertisement?	boolean	
		+--ro node-sid?	boolean	
		+--:(ospf-prefix-flags-case)		
		+--ro no-php?	boolean	
		+--ro explicit-null?	boolean	
		+--ro mapping-server?	boolean	
		+--ro algorithm?	algorithm	
		+--ro (sid-label-index)?		
		+--:(local-label-case)		
		+--ro local-label?	netc:mpls-label	
		+--:(ipv6-address-case)		
		+--ro ipv6-address?	inet:ipv6-address	
		+--:(sid-case)		
		+--ro sid?	uint32	
		+--:(ipv6-prefix-sid-tlv-case)		
		+--ro algorithm?	algorithm	
		+--:(sid-label-tlv-case)		
		+--ro (sid-label-index)?		
		+--:(local-label-case)		
		+--ro local-label?	netc:mpls-label	
		+--:(ipv6-address-case)		
		+--ro ipv6-address?	inet:ipv6-address	
		+--:(sid-case)		
		+--ro sid?	uint32	
	+--ro sr-binding-sid-labels*			
		+--ro weight?	weight	
		+--ro (flags)?		
		+--:(isis-binding-flags-case)		
		+--ro address-family?	boolean	
		+--ro mirror-context?	boolean	
		+--ro spread-tlv?	boolean	
		+--ro leaked-from-level-2?	boolean	
		+--ro attached-flag?	boolean	
		+--:(ospf-binding-flags-case)		
		+--ro mirroring?	boolean	
		+--ro binding-sub-tlvs*		
		+--ro (binding-sub-tlv)?		
		+--:(prefix-sid-case)		
		+--ro (flags)?		
		+--:(isis-prefix-flags-case)		
		+--ro no-php?	boolean	
		+--ro explicit-null?	boolean	
		+--ro readvertisement?	boolean	
		+--ro node-sid?	boolean	
		+--:(ospf-prefix-flags-case)		
		+--ro no-php?	boolean	
		+--ro explicit-null?	boolean	
		+--ro mapping-server?	boolean	
		+--ro algorithm?	algorithm	

(continues on next page)

(continued from previous page)

```

|           |   +--ro (sid-label-index)?
|           |       +---:(local-label-case)
|           |           |   +--ro local-label?          netc:mpls-label
|           |           +---:(ipv6-address-case)
|           |               |   +--ro ipv6-address?      inet:ipv6-address
|           |               +---:(sid-case)
|                   +--ro sid?          uint32
+---:(ipv6-prefix-sid-case)
|   +--ro algorithm?          algorithm
+---:(sid-label-case)
|   +--ro (sid-label-index)?
|       +---:(local-label-case)
|           |   +--ro local-label?          netc:mpls-label
|           +---:(ipv6-address-case)
|               |   +--ro ipv6-address?      inet:ipv6-address
|               +---:(sid-case)
|                   +--ro sid?          uint32
+---:(ero-metric-case)
|   +--ro ero-metric?          netc:te-metric
+---:(ipv4-ero-case)
|   +--ro loose?              boolean
|   +--ro address             inet:ipv4-address
+---:(ipv6-ero-case)
|   +--ro loose?              boolean
|   +--ro address             inet:ipv6-address
+---:(unnumbered-interface-id-ero-case)
|   +--ro loose?              boolean
|   +--ro router-id?          uint32
|   +--ro interface-id?       uint32
+---:(ipv4-ero-backup-case)
|   +--ro loose?              boolean
|   +--ro address             inet:ipv4-address
+---:(ipv6-ero-backup-case)
|   +--ro loose?              boolean
|   +--ro address             inet:ipv6-address
+---:(unnumbered-interface-id-backup-ero-case)
    +--ro loose?              boolean
    +--ro router-id?          uint32
    +--ro interface-id?       uint32
x---:(te-lsp-attributes-case)
    +--ro te-lsp-attributes

```

## Usage

The Link-State table in a instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-linkstate:linkstate-address-family/bgp-linkstate:linkstate-subsequent-address-family/linkstate-routes

**Method:** GET

**Response Body:**

```
<linkstate-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-linkstate">
  ...

```

(continues on next page)

(continued from previous page)

<code>&lt;/linkstate-routes&gt;</code>
--

---

**Note:** Link-State routes mapping to topology links/nodes/prefixes is supported by BGP Topology Provider.

---

## References

- North-Bound Distribution of Link-State and Traffic Engineering (TE) Information Using BGP
- BGP Link-State extensions for Segment Routing
- Segment Routing BGP Egress Peer Engineering BGP-LS Extensions
- BGP Link-State Information Distribution Implementation Report

### 2.1.9 Flow Specification Family

The BGP Flow Specification (BGP-FS) Multiprotocol extension can be used to distribute traffic flow specifications. For example, the BGP-FS can be used in a case of (distributed) denial-of-service (DDoS) attack mitigation procedures and traffic filtering (BGP/MPLS VPN service, DC).

#### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *Flow Specification API*
  - *IPv4 Flow Specification Route*
  - *IPv6 Flow Specification Route*
- *Usage*
  - *IPv4 Flow Specification*
  - *IPv6 Flows Specification*
  - *IPv4 L3VPN Flows Specification*
- *Programming*
  - *IPv4 Flow Specification*
  - *IPv4 L3VPN Flow Specification*
  - *IPv6 Flow Specification*
- *References*

#### Configuration

This section shows a way to enable BGP-FS family in BGP speaker and peer configuration.

## BGP Speaker

To enable BGP-FS support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <global>
      <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
      </config>
      <afi-safis>
        <afi-safi>
          <afi-safi-name>IPV4-FLOW</afi-safi-name>
        </afi-safi>
        <afi-safi>
          <afi-safi-name>IPV6-FLOW</afi-safi-name>
        </afi-safi>
        <afi-safi>
          <afi-safi-name>IPV4-L3VPN-FLOW</afi-safi-name>
        </afi-safi>
        <afi-safi>
          <afi-safi-name>IPV6-L3VPN-FLOW</afi-safi-name>
        </afi-safi>
      </afi-safis>
    </global>
  </bgp>
</protocol>
```

## BGP Peer

Here is an example for BGP peer configuration with enabled BGP-FS family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <neighbor-address>192.0.2.1</neighbor-address>
  <afi-safis>
    <afi-safi>
```

(continues on next page)

(continued from previous page)

```

<afi-safi-name>IPV4-FLOW</afi-safi-name>
</afi-safi>
<afi-safi>
  <afi-safi-name>IPV6-FLOW</afi-safi-name>
</afi-safi>
<afi-safi>
  <afi-safi-name>IPV4-L3VPN-FLOW</afi-safi-name>
</afi-safi>
<afi-safi>
  <afi-safi-name>IPV6-L3VPN-FLOW</afi-safi-name>
</afi-safi>
</afi-safis>
</neighbor>

```

## Flow Specification API

Following trees illustrate the BGP Flow Specification routes structure.

### IPv4 Flow Specification Route

```

:(flowspec-routes-case)
++-ro flowspec-routes
  +-ro flowspec-route* [route-key path-id]
    +-ro route-key      string
    +-ro flowspec*
      |  +-ro (flowspec-type)?
      |  +-:(port-case)
      |  |  +-ro ports*
      |  |  +-ro op?      numeric-operand
      |  |  +-ro value?   uint16
      |  +-:(destination-port-case)
      |  |  +-ro destination-ports*
      |  |  +-ro op?      numeric-operand
      |  |  +-ro value?   uint16
      |  +-:(source-port-case)
      |  |  +-ro source-ports*
      |  |  +-ro op?      numeric-operand
      |  |  +-ro value?   uint16
      +-:(icmp-type-case)
      |  +-ro types*
      |  |  +-ro op?      numeric-operand
      |  |  +-ro value?   uint8
      +-:(icmp-code-case)
      |  +-ro codes*
      |  |  +-ro op?      numeric-operand
      |  |  +-ro value?   uint8
      +-:(tcp-flags-case)
      |  +-ro tcp-flags*
      |  |  +-ro op?      bitmask-operand
      |  |  +-ro value?   uint16
      +-:(packet-length-case)
      |  +-ro packet-lengths*
      |  |  +-ro op?      numeric-operand

```

(continues on next page)

(continued from previous page)

```

|   |     +-+ro value?      uint16
|   +-:(dscp-case)
|   |     +-+ro dscps*
|   |     +-+ro op?        numeric-operand
|   |     +-+ro value?      dscp
|   +-:(fragment-case)
|   |     +-+ro fragments*
|   |     +-+ro op?        bitmask-operand
|   |     +-+ro value?      fragment
|   +-:(destination-prefix-case)
|   |     +-+ro destination-prefix?    inet:ipv4-prefix
|   +-:(source-prefix-case)
|   |     +-+ro source-prefix?       inet:ipv4-prefix
|   +-:(protocol-ip-case)
|     +-+ro protocol-ips*
|     +-+ro op?        numeric-operand
|     +-+ro value?      uint8
+-+ro path-id      path-id
+-+ro attributes
+-+ro extended-communities*
  +-+ro transitive?           boolean
  +-+ro (extended-community)?
    +-:(traffic-rate-extended-community-case)
    |   +-+ro traffic-rate-extended-community
    |   +-+ro informative-as?      bgp-t:short-as-number
    |   +-+ro local-administrator? netc:bandwidth
    +-:(traffic-action-extended-community-case)
    |   +-+ro traffic-action-extended-community
    |   +-+ro sample?            boolean
    |   +-+ro terminal-action?   boolean
    +-:(redirect-extended-community-case)
    |   +-+ro redirect-extended-community
    |   +-+ro global-administrator?  bgp-t:short-as-number
    |   +-+ro local-administrator?  binary
    +-:(traffic-marking-extended-community-case)
    |   +-+ro traffic-marking-extended-community
    |   +-+ro global-administrator?  dscp
    +-:(redirect-ipv4-extended-community-case)
    |   +-+ro redirect-ipv4
    |   +-+ro global-administrator?  inet:ipv4-address
    |   +-+ro local-administrator?  uint16
    +-:(redirect-as4-extended-community-case)
    |   +-+ro redirect-as4
    |   +-+ro global-administrator?  inet:as-number
    |   +-+ro local-administrator?  uint16
    +-:(redirect-ip-nh-extended-community-case)
      +-+ro redirect-ip-nh-extended-community
      +-+ro next-hop-address?      inet:ip-address
      +-+ro copy?                boolean

```

## IPv6 Flow Specification Route

```
: (flowspec-ipv6-routes-case)
  +-+ro flowspec-ipv6-routes
```

(continues on next page)

(continued from previous page)

```

+--ro flowspec-route* [route-key path-id]
    +-ro flowspec*
    |  +-ro (flowspec-type)?
    |  |  +-:(port-case)
    |  |  |  +-ro ports*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint16
    |  |  +-:(destination-port-case)
    |  |  |  +-ro destination-ports*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint16
    |  |  +-:(source-port-case)
    |  |  |  +-ro source-ports*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint16
    |  |  +-:(icmp-type-case)
    |  |  |  +-ro types*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint8
    |  |  +-:(icmp-code-case)
    |  |  |  +-ro codes*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint8
    |  |  +-:(tcp-flags-case)
    |  |  |  +-ro tcp-flags*
    |  |  |  |  +-ro op?      bitmask-operand
    |  |  |  |  +-ro value?   uint16
    |  |  +-:(packet-length-case)
    |  |  |  +-ro packet-lengths*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint16
    |  |  +-:(dscp-case)
    |  |  |  +-ro dscps*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   dscp
    |  |  +-:(fragment-case)
    |  |  |  +-ro fragments*
    |  |  |  |  +-ro op?      bitmask-operand
    |  |  |  |  +-ro value?   fragment
    |  |  +-:(destination-ipv6-prefix-case)
    |  |  |  +-ro destination-prefix?   inet:ipv6-prefix
    |  |  +-:(source-ipv6-prefix-case)
    |  |  |  +-ro source-prefix?       inet:ipv6-prefix
    |  |  +-:(next-header-case)
    |  |  |  +-ro next-headers*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint8
    |  |  +-:(flow-label-case)
    |  |  |  +-ro flow-label*
    |  |  |  |  +-ro op?      numeric-operand
    |  |  |  |  +-ro value?   uint32
    +-ro path-id      path-id
    +-ro attributes
        +-ro extended-communities*
            +-ro transitive?           boolean
            +-ro (extended-community)?
                +-:(traffic-rate-extended-community-case)

```

(continues on next page)

(continued from previous page)

```

|   +--ro traffic-rate-extended-community
|   +--ro informative-as?          bgp-t:short-as-number
|   +--ro local-administrator?    netc:bandwidth
+--:(traffic-action-extended-community-case)
|   +--ro traffic-action-extended-community
|   +--ro sample?                boolean
|   +--ro terminal-action?      boolean
+--:(redirect-extended-community-case)
|   +--ro redirect-extended-community
|   +--ro global-administrator?  bgp-t:short-as-number
|   +--ro local-administrator?  binary
+--:(traffic-marking-extended-community-case)
|   +--ro traffic-marking-extended-community
|   +--ro global-administrator?  dscp
+--:(redirect-ipv6-extended-community-case)
|   +--ro redirect-ipv6
|   +--ro global-administrator?  inet:ipv6-address
|   +--ro local-administrator?  uint16
+--:(redirect-as4-extended-community-case)
|   +--ro redirect-as4
|   +--ro global-administrator?  inet:as-number
|   +--ro local-administrator?  uint16
+--:(redirect-ip-nh-extended-community-case)
+--ro redirect-ip-nh-extended-community
+--ro next-hop-address?        inet:ip-address
+--ro copy?                  boolean

```

## Usage

The flowspec route represents rules and an action, defined as an extended community.

### IPv4 Flow Specification

The IPv4 Flowspec table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-flowspec:flowspec-subsequent-address-family/bgp-flowspec:flowspec-routes

**Method:** GET

#### Response Body:

```

<flowspec-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-flowspec">
  <flowspec-route>
    <path-id>0</path-id>
    <route-key>all packets to 192.168.0.1/32 AND from 10.0.0.2/32 AND where IP_
    ↵protocol equals to 17 or equals to 6 AND where port equals to 80 or equals to 8080_
    ↵AND where destination port is greater than 8080 and is less than 8088 or equals to_
    ↵3128 AND where source port is greater than 1024 </route-key>
    <attributes>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <origin>

```

(continues on next page)

(continued from previous page)

```

        <value>igp</value>
    </origin>
    <as-path></as-path>
    <extended-communities>
        <transitive>true</transitive>
        <redirect-extended-community>
            <local-administrator>AgMWLg==</local-administrator>
            <global-administrator>258</global-administrator>
        </redirect-extended-community>
    </extended-communities>
</attributes>
<flowspec>
    <destination-prefix>192.168.0.1/32</destination-prefix>
</flowspec>
<flowspec>
    <source-prefix>10.0.0.2/32</source-prefix>
</flowspec>
<flowspec>
    <protocol-ips>
        <op>equals</op>
        <value>17</value>
    </protocol-ips>
    <protocol-ips>
        <op>equals end-of-list</op>
        <value>6</value>
    </protocol-ips>
</flowspec>
<flowspec>
    <ports>
        <op>equals</op>
        <value>80</value>
    </ports>
    <ports>
        <op>equals end-of-list</op>
        <value>8080</value>
    </ports>
</flowspec>
<flowspec>
    <destination-ports>
        <op>greater-than</op>
        <value>8080</value>
    </destination-ports>
    <destination-ports>
        <op>less-than and-bit</op>
        <value>8088</value>
    </destination-ports>
    <destination-ports>
        <op>equals end-of-list</op>
        <value>3128</value>
    </destination-ports>
</flowspec>
<flowspec>
    <source-ports>
        <op>end-of-list greater-than</op>
        <value>1024</value>
    </source-ports>
</flowspec>

```

(continues on next page)

(continued from previous page)

```
</flowspec-route>
</flowspec-routes>
```

## IPv6 Flows Specification

The IPv6 Flowspec table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv6-address-family/bgp-flowspec:flowspec-subsequent-address-family/bgp-flowspec:flowspec-ipv6-routes

**Method:** GET

**Response Body:**

```
<flowspec-ipv6-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-flowspec">
  <flowspec-route>
    <path-id>0</path-id>
    <route-key>all packets to 2001:db8:31::/64 AND from 2001:db8:30::/64 AND
    ↵where next header equals to 17 AND where DSCP equals to 50 AND where flow label
    ↵equals to 2013 </route-key>
    <attributes>
      <local-pref>
        <pref>100</pref>
      </local-pref>
      <origin>
        <value>igp</value>
      </origin>
      <as-path></as-path>
      <extended-communities>
        <transitive>true</transitive>
        <traffic-rate-extended-community>
          <informative-as>0</informative-as>
          <local-administrator>AAAAAA==</local-administrator>
        </traffic-rate-extended-community>
      </extended-communities>
    </attributes>
    <flowspec>
      <destination-prefix>2001:db8:31::/64</destination-prefix>
    </flowspec>
    <flowspec>
      <source-prefix>2001:db8:30::/64</source-prefix>
    </flowspec>
    <flowspec>
      <next-headers>
        <op>equals end-of-list</op>
        <value>17</value>
      </next-headers>
    </flowspec>
    <flowspec>
      <dscps>
        <op>equals end-of-list</op>
        <value>50</value>
      </dscps>
    </flowspec>
    <flowspec>
```

(continues on next page)

(continued from previous page)

```

<flow-label>
    <op>equals end-of-list</op>
    <value>2013</value>
</flow-label>
</flowspec>
</flowspec-route>
</flowspec-ipv6-routes>

```

## IPv4 L3VPN Flows Specification

The IPv4 L3VPN Flowspec table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-flowspec:flowspec-l3vpn-subsequent-address-family/bgp-flowspec:flowspec-l3vpn-ipv4-routes

**Method:** GET

### Response Body:

```

<flowspec-l3vpn-ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-flowspec">
    <flowspec-l3vpn-route>
        <path-id>0</path-id>
        <route-key>[l3vpn with route-distinguisher 172.16.0.44:101] all packets from 10.0.0.3/32</route-key>
        <attributes>
            <local-pref>
                <pref>100</pref>
            </local-pref>
            <ipv4-next-hop>
                <global>5.6.7.8</global>
            </ipv4-next-hop>
            <origin>
                <value>igp</value>
            </origin>
            <as-path></as-path>
            <extended-communities>
                <transitive>true</transitive>
                <redirect-ip-nh-extended-community>
                    <copy>false</copy>
                    <next-hop-address>0.0.0.0</next-hop-address>
                </redirect-ip-nh-extended-community>
            </extended-communities>
        </attributes>
        <route-distinguisher>172.16.0.44:101</route-distinguisher>
        <flowspec>
            <source-prefix>10.0.0.3/32</source-prefix>
        </flowspec>
    </flowspec-l3vpn-route>
</flowspec-l3vpn-ipv4-routes>

```

## Programming

## IPv4 Flow Specification

This examples show how to originate and remove IPv4 fowspec route via programmable RIB. Make sure the *Application Peer* is configured first.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-flowspec:flowspec-subsequent-address-family/bgp-flowspec:flowspec-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<flowspec-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-flowspec">
    <route-key>flow1</route-key>
    <path-id>0</path-id>
    <flowspec>
        <destination-prefix>192.168.0.1/32</destination-prefix>
    </flowspec>
    <flowspec>
        <source-prefix>10.0.0.1/32</source-prefix>
    </flowspec>
    <flowspec>
        <protocol-ips>
            <op>equals end-of-list</op>
            <value>6</value>
        </protocol-ips>
    </flowspec>
    <flowspec>
        <ports>
            <op>equals end-of-list</op>
            <value>80</value>
        </ports>
    </flowspec>
    <flowspec>
        <destination-ports>
            <op>greater-than</op>
            <value>8080</value>
        </destination-ports>
        <destination-ports>
            <op>and-bit less-than end-of-list</op>
            <value>8088</value>
        </destination-ports>
    </flowspec>
    <flowspec>
        <source-ports>
            <op>greater-than end-of-list</op>
            <value>1024</value>
        </source-ports>
    </flowspec>
    <flowspec>
        <types>
            <op>equals end-of-list</op>
            <value>0</value>
        </types>
    </flowspec>
    <flowspec>
```

(continues on next page)

(continued from previous page)

```

<codes>
    <op>equals end-of-list</op>
    <value>0</value>
</codes>
</flowspec>
<flowspec>
    <tcp-flags>
        <op>match end-of-list</op>
        <value>32</value>
    </tcp-flags>
</flowspec>
<flowspec>
    <packet-lengths>
        <op>greater-than</op>
        <value>400</value>
    </packet-lengths>
    <packet-lengths>
        <op>and-bit less-than end-of-list</op>
        <value>500</value>
    </packet-lengths>
</flowspec>
<flowspec>
    <dscps>
        <op>equals end-of-list</op>
        <value>20</value>
    </dscps>
</flowspec>
<flowspec>
    <fragments>
        <op>match end-of-list</op>
        <value>first</value>
    </fragments>
</flowspec>
<attributes>
    <origin>
        <value>igp</value>
    </origin>
    <as-path/>
    <local-pref>
        <pref>100</pref>
    </local-pref>
    <extended-communities>
        ...
    </extended-communities>
</attributes>
</flowspec>
</flowspec-route>

```

## Extended Communities

- Traffic Rate

```

1  <extended-communities>
2      <transitive>true</transitive>
3      <traffic-rate-extended-community>
4          <informative-as>123</informative-as>

```

(continues on next page)

(continued from previous page)

```

5   <local-administrator>AAAAAA==</local-administrator>
6   </traffic-rate-extended-community>
7 </extended-communities>
```

@line 5: A rate in bytes per second, AAAA== (0) means traffic discard.

- Traffic Action

```

<extended-communities>
  <transitive>true</transitive>
  <traffic-action-extended-community>
    <sample>true</sample>
    <terminal-action>false</terminal-action>
  </traffic-action-extended-community>
</extended-communities>
```

- Redirect to VRF AS 2byte format

```

<extended-communities>
  <transitive>true</transitive>
  <redirect-extended-community>
    <global-administrator>123</global-administrator>
    <local-administrator>AAAAew==</local-administrator>
  </redirect-extended-community>
</extended-communities>
```

- Redirect to VRF IPv4 format

```

<extended-communities>
  <transitive>true</transitive>
  <redirect-ipv4>
    <global-administrator>192.168.0.1</global-administrator>
    <local-administrator>12345</local-administrator>
  </redirect-ipv4>
</extended-communities>
```

- Redirect to VRF AS 4byte format

```

<extended-communities>
  <transitive>true</transitive>
  <redirect-as4>
    <global-administrator>64495</global-administrator>
    <local-administrator>12345</local-administrator>
  </redirect-as4>
</extended-communities>
```

- Redirect to IP

```

<extended-communities>
  <transitive>true</transitive>
  <redirect-ip-nh-extended-community>
    <copy>false</copy>
  </redirect-ip-nh-extended-community>
</extended-communities>
```

- Traffic Marking

```
<extended-communities>
  <transitive>true</transitive>
  <traffic-marking-extended-community>
    <global-administrator>20</global-administrator>
  </traffic-marking-extended-community>
</extended-communities>
```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-flowspec:flowspec-subsequent-address-family/bgp-flowspec:flowspec-routes/bgp-flowspec:flowspec-route/flow1/0

**Method:** DELETE

## IPv4 L3VPN Flow Specification

This examples show how to originate and remove IPv4 L3VPN flowspec route via programmable RIB.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-flowspec:flowspec-l3vpn-subsequent-address-family/bgp-flowspec:flowspec-l3vpn-ipv4-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<flowspec-l3vpn-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-flowspec">
  <path-id>0</path-id>
  <route-key>flow-l3vpn</route-key>
  <route-distinguisher>172.16.0.44:101</route-distinguisher>
  <flowspec>
    <source-prefix>10.0.0.3/32</source-prefix>
  </flowspec>
  <attributes>
    <local-pref>
      <pref>100</pref>
    </local-pref>
    <origin>
      <value>igp</value>
    </origin>
    <as-path></as-path>
    <extended-communities>
      <transitive>true</transitive>
      <redirect-ipv4>
        <global-administrator>172.16.0.44</global-administrator>
        <local-administrator>102</local-administrator>
      </redirect-ipv4>
    </extended-communities>
  </attributes>
</flowspec-l3vpn-route>
```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-flowspec:flowspec-13vpn-subsequent-address-family/bgp-flowspec:flowspec-13vpn-ipv4-routes/flowspec-13vpn-route/flow-13vpn/0

**Method:** DELETE

## IPv6 Flow Specification

This examples show how to originate and remove IPv6 fowspec route via programmable RIB.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv6-address-family/bgp-flowspec:flowspec-subsequent-address-family/bgp-flowspec:flowspec-ipv6-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<flowspec-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-flowspec">
    <route-key>flow-v6</route-key>
    <path-id>0</path-id>
    <flowspec>
        <destination-prefix>2001:db8:30::3/128</destination-prefix>
    </flowspec>
    <flowspec>
        <source-prefix>2001:db8:31::3/128</source-prefix>
    </flowspec>
    <flowspec>
        <flow-label>
            <op>equals end-of-list</op>
            <value>1</value>
        </flow-label>
    </flowspec>
    <attributes>
        <extended-communities>
            <transitive>true</transitive>
            <redirect-ipv6>
                <global-administrator>2001:db8:1::6</global-administrator>
                <local-administrator>12345</local-administrator>
            </redirect-ipv6>
        </extended-communities>
        <origin>
            <value>igp</value>
        </origin>
        <as-path/>
        <local-pref>
            <pref>100</pref>
        </local-pref>
    </attributes>
</flowspec-route>
```

---

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv6-address-family/bgp-flowspec:flowspec-subsequent-address-family/bgp-flowspec:flowspec-ipv6-routes/bgp-flowspec:flowspec-route/flow-v6/0

**Method:** DELETE

## References

- Dissemination of Flow Specification Rules
- Dissemination of Flow Specification Rules for IPv6
- BGP Flow-Spec Extended Community for Traffic Redirect to IP Next Hop
- Clarification of the Flowspec Redirect Extended Community
- Revised Validation Procedure for BGP Flow Specifications

### 2.1.10 MCAST-VPN Family

The BGP Multicast VPN(BGP MCAST-VPN) Multiprotocol extension can be used for MVPN auto-discovery, advertising MVPN to Inclusive P-Multicast Service Interface (I-PMSI) tunnel binding, advertising (C-S,C-G) to Selective PMSI (S-PMSI) tunnel binding, VPN customer multicast routing information exchange among Provider Edge routers (PEs), choosing a single forwarder PE, and for procedures in support of co-locating a Customer Rendezvous Point (C-RP) on a PE.

#### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *Ipv4 MCAST-VPN Route API*
- *Ipv6 MCAST-VPN Route API*
- *Usage*
- *Programming*

## Configuration

This section shows a way to enable MCAST-VPN family in BGP speaker and peer configuration.

### BGP Speaker

To enable MCAST-VPN support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <global>
      <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
      </config>
      <afi-safis>
        <afi-safi>
          <afi-safi-name>IPV4-MCAST-VPN</afi-safi-name>
        </afi-safi>
        <afi-safi>
          <afi-safi-name>IPV6-MCAST-VPN</afi-safi-name>
        </afi-safi>
      </afi-safis>
    </global>
  </bgp>
</protocol>
```

## BGP Peer

Here is an example for BGP peer configuration with enabled IPV4 MCAST-VPN family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <neighbor-address>192.0.2.1</neighbor-address>
  <afi-safis>
    <afi-safi>
      <afi-safi-name>IPV4-MCAST-VPN</afi-safi-name>
    </afi-safi>
  </afi-safis>
</neighbor>
```

## Ipv4 MCAST-VPN Route API

Following tree illustrates the BGP MCAST-VPN route structure.

```
: (mvpn-routes-ipv4-case)
  +-+ro mvpn-routes-ipv4
    +-+ro mvpn-route* [route-key path-id]
      +-+ro (mvpn-choice)
        +-+: (intra-as-i-pmsi-a-d-case)
          |  +-+ro intra-as-i-pmsi-a-d
        +-+: (inter-as-i-pmsi-a-d-case)
```

(continues on next page)

(continued from previous page)

```

|   +--ro inter-as-i-pmsi-a-d
|     +-ro source-as      inet:as-number
+--:(s-pmsi-a-d-case)
|   +--ro s-pmsi-a-d
|     +-ro multicast-source          inet:ip-address
|     +-ro (multicast-group)?
|       +--:(c-g-address-case)
|         |  +-ro c-g-address?      inet:ip-address
|         +--:(ldp-mp-opaque-value-case)
|           +-ro ldp-mp-opaque-value
|             +-ro opaque-type      uint8
|             +-ro opaque-extended-type?  uint16
|             +-ro opaque          yang:hex-string
+--:(leaf-a-d-case)
|   +--ro leaf-a-d
|     +-ro (leaf-a-d-route-key)
|       +--:(inter-as-i-pmsi-a-d-case)
|         |  +-ro inter-as-i-pmsi-a-d
|           |  +-ro source-as      inet:as-number
|         +--:(s-pmsi-a-d-case)
|           +-ro s-pmsi-a-d
|             +-ro multicast-source          inet:ip-address
|             +-ro (multicast-group)?
|               +--:(c-g-address-case)
|                 |  +-ro c-g-address?      inet:ip-address
|                 +--:(ldp-mp-opaque-value-case)
|                   +-ro ldp-mp-opaque-value
|                     +-ro opaque-type      uint8
|                     +-ro opaque-extended-type?  uint16
|                     +-ro opaque          yang:hex-string
+--:(source-active-a-d-case)
|   +--ro source-active-a-d
|     +-ro multicast-source      inet:ip-address
|     +-ro multicast-group      inet:ip-address
+--:(shared-tree-join-case)
|   +--ro shared-tree-join
|     +-ro c-multicast
|       +-ro multicast-source          inet:ip-address
|       +-ro source-as              inet:as-number
|       +-ro (multicast-group)?
|         +--:(c-g-address-case)
|           |  +-ro c-g-address?      inet:ip-address
|           +--:(ldp-mp-opaque-value-case)
|             +-ro ldp-mp-opaque-value
|               +-ro opaque-type      uint8
|               +-ro opaque-extended-type?  uint16
|               +-ro opaque          yang:hex-string
+--:(source-tree-join-case)
|   +--ro source-tree-join
|     +-ro c-multicast
|       +-ro multicast-source          inet:ip-address
|       +-ro source-as              inet:as-number
|       +-ro (multicast-group)?
|         +--:(c-g-address-case)
|           |  +-ro c-g-address?      inet:ip-address
|           +--:(ldp-mp-opaque-value-case)
|             +-ro ldp-mp-opaque-value

```

(continues on next page)

(continued from previous page)

+--ro opaque-type	uint8
+--ro opaque-extended-type?	uint16
+--ro opaque	yang:hex-string

...

## Ipv6 MCAST-VPN Route API

Following tree illustrates the BGP MCAST-VPN route structure.

```
: (mvpn-routes-ipv6-case)
  +-+ro mvpn-routes-ipv6
    +-+ro mvpn-route* [route-key path-id]
      +-+ro (mvpn-choice)
        +--+:(intra-as-i-pmsi-a-d-case)
          | +-+ro intra-as-i-pmsi-a-d
        +--+:(inter-as-i-pmsi-a-d-case)
          | +-+ro inter-as-i-pmsi-a-d
          |   +-+ro source-as     inet:as-number
        +--+:(s-pmsi-a-d-case)
          | +-+ro s-pmsi-a-d
          |   +-+ro multicast-source           inet:ip-address
          |   +-+ro (multicast-group)?
            +--+:(c-g-address-case)
              | +-+ro c-g-address?             inet:ip-address
            +--+:(ldp-mp-opaque-value-case)
              | +-+ro ldp-mp-opaque-value
                +-+ro opaque-type          uint8
                +-+ro opaque-extended-type?  uint16
                +-+ro opaque               yang:hex-string
        +--+:(leaf-a-d-case)
          | +-+ro leaf-a-d
          |   +-+ro (leaf-a-d-route-key)
          |     +--+:(inter-as-i-pmsi-a-d-case)
          |       | +-+ro inter-as-i-pmsi-a-d
          |       |   +-+ro source-as     inet:as-number
          |     +--+:(s-pmsi-a-d-case)
          |       | +-+ro s-pmsi-a-d
          |         +-+ro multicast-source           inet:ip-address
          |         +-+ro (multicast-group)?
            +--+:(c-g-address-case)
              | +-+ro c-g-address?             inet:ip-address
            +--+:(ldp-mp-opaque-value-case)
              | +-+ro ldp-mp-opaque-value
                +-+ro opaque-type          uint8
                +-+ro opaque-extended-type?  uint16
                +-+ro opaque               yang:hex-string
        +--+:(source-active-a-d-case)
          | +-+ro source-active-a-d
          |   +-+ro multicast-source     inet:ip-address
          |   +-+ro multicast-group     inet:ip-address
        +--+:(shared-tree-join-case)
          | +-+ro shared-tree-join
          |   +-+ro c-multicast
          |     +-+ro multicast-source           inet:ip-address
          |     +-+ro source-as             inet:as-number
```

(continues on next page)

(continued from previous page)

```

|     +--ro (multicast-group)?
|         +--:(c-g-address-case)
|             |     +--ro c-g-address?           inet:ip-address
|             +--:(ldp-mp-opaque-value-case)
|                 +--ro ldp-mp-opaque-value
|                     +--ro opaque-type          uint8
|                     +--ro opaque-extended-type?  uint16
|                     +--ro opaque            yang:hex-string
+--:(source-tree-join-case)
    +--ro source-tree-join
        +--ro c-multicast
            +--ro multicast-source      inet:ip-address
            +--ro source-as            inet:as-number
            +--ro (multicast-group)?
                +--:(c-g-address-case)
                    |     +--ro c-g-address?           inet:ip-address
                +--:(ldp-mp-opaque-value-case)
                    +--ro ldp-mp-opaque-value
                        +--ro opaque-type          uint8
                        +--ro opaque-extended-type?  uint16
                        +--ro opaque            yang:hex-string
...

```

## Usage

The Ipv4 Multicast VPN table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-mvpn:mcast-vpn-subsequent-address-family/bgp-mvpn-ipv4:mvpn-routes

**Method:** GET

**Response Body:**

```

<mvpn-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp:mvpn:ipv4">
    <mvpn-route>
        <route-key>flow1</route-key>
        <path-id>0</path-id>
        <intra-as-i-pmsi-a-d>
            <route-distinguisher>172.16.0.44:101</route-distinguisher>
            <orig-route-ip>192.168.100.1</orig-route-ip>
        </intra-as-i-pmsi-a-d>
        <attributes>
            <ipv4-next-hop>
                <global>199.20.166.41</global>
            </ipv4-next-hop>
            <as-path/>
            <origin>
                <value>igp</value>
            </origin>
        </attributes>
    </mvpn-route>
</mvpn-routes>

```

The Ipv6 Multicast VPN table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-mvpn:mcast-vpn-subsequent-address-family/bgp-mvpn-ipv6:mvpn-routes

**Method:** GET

**Response Body:**

```
<mvpn-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp:mvpn:ipv6">
  <mvpn-route>
    <route-key>flow1</route-key>
    <path-id>0</path-id>
    <intra-as-i-pmsi-a-d>
      <route-distinguisher>172.16.0.44:101</route-distinguisher>
      <orig-route-ip>192.168.100.1</orig-route-ip>
    </intra-as-i-pmsi-a-d>
    <attributes>
      <ipv6-next-hop>
        <global>2001:db8:1::6</global>
      </ipv6-next-hop>
      <as-path/>
      <origin>
        <value>igp</value>
      </origin>
    </attributes>
  </mvpn-route>
</mvpn-routes>
```

## Programming

These examples show how to originate and remove MCAST-VPN routes via programmable RIB. There are seven different types of MCAST-VPN routes, and multiples extended communities. Routes can be used for variety of use-cases supported by BGP/MPLS MCAST-VPN. Make sure the *Application Peer* is configured first.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-mvpn:mcast-vpn-subsequent-address-family/bgp-mvpn-ipv4:mvpn-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1  <mvpn-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp:mvpn:ipv4">
2    <route-key>mvpn</route-key>
3    <path-id>0</path-id>
4    <intra-as-i-pmsi-a-d>
5      <route-distinguisher>172.16.0.44:101</route-distinguisher>
6      <orig-route-ip>192.168.100.1</orig-route-ip>
7    </intra-as-i-pmsi-a-d>
8    ....
9    <attributes>
10      <ipv4-next-hop>
11        <global>199.20.166.41</global>
12      </ipv4-next-hop>
13      <as-path/>
14      <origin>
```

(continues on next page)

(continued from previous page)

```

15      <value>igp</value>
16    </origin>
17    <extended-communities>
18      ...
19    </extended-communities>
20  </attributes>
21</mvpn-route>
```

@line 4: One of the MCAST-VPN route must be set here.

@line 15: In some cases, specific extended community presence is required.

## MVPN Routes:

- Intra-AS I-PMSI A-D

```

<intra-as-i-pmsi-a-d>
  <route-distinguisher>0:5:3</route-distinguisher>
  <orig-route-ip>10.10.10.10</orig-route-ip>
</intra-as-i-pmsi-a-d>
```

- Inter-AS I-PMSI A-D

```

<inter-as-i-pmsi-a-d>
  <route-distinguisher>1.2.3.4:258</route-distinguisher>
  <source-as>64496</source-as>
</inter-as-i-pmsi-a-d>
```

- S-PMSI A-D

```

<s-pmsi-a-d>
  <route-distinguisher>1.2.3.4:258</route-distinguisher>
  <multicast-source>10.0.0.10</multicast-source>
  <c-g-address>12.0.0.12</c-g-address>
  <orig-route-ip>1.0.0.1</orig-route-ip>
</s-pmsi-a-d>
```

```

<s-pmsi-a-d>
  <route-distinguisher>1.2.3.4:258</route-distinguisher>
  <multicast-source>10.0.0.10</multicast-source>
  <ldp-mp-opaque-value>
    <opaque-type>1</opaque-type>
    <opaque-extended-type>0</opaque-extended-type>
    <opaque>das75das48bvxc</opaque>
  </ldp-mp-opaque-value>
  <orig-route-ip>1.0.0.1</orig-route-ip>
</s-pmsi-a-d>
```

- Leaf A-D

```

<leaf-a-d>
  <inter-as-i-pmsi-a-d>
    <route-distinguisher>1.2.3.4:258</route-distinguisher>
    <source-as>1</source-as>
  </inter-as-i-pmsi-a-d>
```

(continues on next page)

(continued from previous page)

```
<orig-route-ip>1.0.0.1</orig-route-ip>
</leaf-a-d>
```

```
<leaf-a-d>
  <s-pmsi-a-d>
    <route-distinguisher>1.2.3.4:258</route-distinguisher>
    <multicast-source>10.0.0.10</multicast-source>
    <ldp-mp-opaque-value>
      <opaque-type>1</opaque-type>
      <opaque-extended-type>0</opaque-extended-type>
      <opaque>das75das48bvxc</opaque>
    </ldp-mp-opaque-value>
    <orig-route-ip>1.0.0.1</orig-route-ip>
  </s-pmsi-a-d>
  <orig-route-ip>1.0.0.1</orig-route-ip>
</leaf-a-d>
```

- Source Active A-D

```
<source-active-a-d>
  <route-distinguisher>1.2.3.4:258</route-distinguisher>
  <multicast-source>1.0.0.1</multicast-source>
  <multicast-group>2.0.0.2</multicast-group>
</source-active-a-d>
```

- Shared Tree Join

```
<shared-tree-join>
  <c-multicast>
    <route-distinguisher>1.2.3.4:258</route-distinguisher>
    <source-as>64415</source-as>
    <multicast-source>1.0.0.1</multicast-source>
    <c-g-address>2.0.0.2</c-g-address>
  </c-multicast>
</shared-tree-join>
```

```
<shared-tree-join>
  <c-multicast>
    <route-distinguisher>1.2.3.4:258</route-distinguisher>
    <source-as>64415</source-as>
    <multicast-source>1.0.0.1</multicast-source>
    <ldp-mp-opaque-value>
      <opaque-type>1</opaque-type>
      <opaque-extended-type>0</opaque-extended-type>
      <opaque>das75das48bvxc</opaque>
    </ldp-mp-opaque-value>
  </c-multicast>
</shared-tree-join>
```

- Source Tree Join

```
<source-tree-join>
  <c-multicast>
    <route-distinguisher>1.2.3.4:258</route-distinguisher>
    <source-as>64415</source-as>
    <multicast-source>1.0.0.1</multicast-source>
```

(continues on next page)

(continued from previous page)

```
<c-g-address>2.0.0.2</c-g-address>
</c-multicast>
</source-tree-join>
```

```
<source-tree-join>
  <c-multicast>
    <route-distinguisher>1.2.3.4:258</route-distinguisher>
    <source-as>64415</source-as>
    <multicast-source>1.0.0.1</multicast-source>
    <l3-mp-opaque-value>
      <opaque-type>1</opaque-type>
      <opaque-extended-type>0</opaque-extended-type>
      <opaque>das75das48bvxc</opaque>
    </l3-mp-opaque-value>
  </c-multicast>
</source-tree-join>
```

**Attributes:**

### 2.1.11 PSMI Attribute

- P-Multicast Service Interface Tunnel (PSMI) attribute:

- RSVP-TE P2MP LSP

```
<pmsi-tunnel>
  <leaf-information-required>true</leaf-information-required>
  <mpls-label>20024</mpls-label>
  <rsvp-te-p2mp-lsp>
    <p2mp-id>1111111111</p2mp-id>
    <tunnel-id>11111</tunnel-id>
    <extended-tunnel-id>10.10.10.10</extended-tunnel-id>
  </rsvp-te-p2mp-lsp>
</pmsi-tunnel>
```

- mLDP P2MP LSP

```
<pmsi-tunnel>
  <leaf-information-required>true</leaf-information-required>
  <mpls-label>20024</mpls-label>
  <mldp-p2mp-lsp>
    <address-family xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types"
      ><x:ipv4-address-family></address-family>
      <root-node-address>10.10.10.10</root-node-address>
      <opaque-value>
        <opaque-type>255</opaque-type>
        <opaque-extended-type>11111</opaque-extended-type>
        <opaque>aa:aa:aa</opaque>
      </opaque-value>
    </mldp-p2mp-lsp>
</pmsi-tunnel>
```

- PIM-SSM Tree

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <pim-ssm-tree>
        <p-address>11.12.13.14</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </pim-ssm-tree>
</pmsi-tunnel>
```

– PIM-SM Tree

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <pim-sm-tree>
        <p-address>1.0.0.1</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </pim-sm-tree>
</pmsi-tunnel>
```

– BIDIR-PIM Tree

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <bidir-pim-tree>
        <p-address>1.0.0.1</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </bidir-pim-tree>
</pmsi-tunnel>
```

– Ingress Replication

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <ingress-replication>
        <receiving-endpoint-address>172.12.123.3</receiving-endpoint-address>
    </ingress-replication>
</pmsi-tunnel>
```

– mLDP MP2MP LSP

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <mldp-mp2mp-lsp>
        <opaque-type>255</opaque-type>
        <opaque-extended-type>11111</opaque-extended-type>
        <opaque>aa:aa</opaque>
    </mldp-mp2mp-lsp>
</pmsi-tunnel>
```

- PE Distinguisher Labels Attribute

```
<pe-distinguisher-labels-attribute>
    <pe-distinguisher-label-attribute>
```

(continues on next page)

(continued from previous page)

```

<pe-address>10.10.10.1</pe-address>
<mpls-label>20024</mpls-label>
</pe-distinguisher-label-attribute>
<pe-distinguisher-label-attribute>
    <pe-address>10.10.20.2</pe-address>
    <mpls-label>20028</mpls-label>
</pe-distinguisher-label-attribute>
</pe-distinguisher-labels-attribute>

```

**Extended Communities:**

- Source AS Extended Community

```

<extended-communities>
    <transitive>true</transitive>
    <source-as-extended-community>
        <global-administrator>65</global-administrator>
    </source-as-extended-community>
</extended-communities>

```

- Source AS 4 Octets Extended Community

```

<extended-communities>
    <transitive>true</transitive>
    <source-as-4-extended-community>
        <global-administrator>65555</global-administrator>
    </source-as-4-extended-community>
</extended-communities>

```

- ES-Import Route Target

```

<extended-communities>
    <transitive>true</transitive>
    <vrf-route-import-extended-community>
        <inet4-specific-extended-community-common>
            <global-administrator>10.0.0.1</global-administrator>
            <local-administrator>123=</local-administrator>
        </inet4-specific-extended-community-common>
    </vrf-route-import-extended-community>
</extended-communities>

```

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/bgp-mvpn:mcast-vpn-subsequent-address-family/bgp-mvpn-ipv4:mvpn-routes/mvpn-route/mvpn/0

**Method:** DELETE

**References**

- Multicast in MPLS/BGP IP VPNs
- BGP Encodings and Procedures for Multicast in MPLS/BGP IP VPNs
- IPv4 and IPv6 Infrastructure Addresses in BGP Updates for Multicast VPN

## 2.1.12 EVPN Family

The BGP MPLS-Based Ethernet VPN (BGP EVPN) Multiprotocol extension can be used to distribute Ethernet L2VPN service related routes in order to support a concept of MAC routing. A major use-case for BGP EVPN is data-center interconnection (DCI), where advantage of BGP EVPN are MAC/IP address advertising across MPLS network, Multihoming functionality including Fast Convergence, Split Horizon and Aliasing support, VM (MAC) Mobility, support Multicast and Broadcast traffic. In addition to MPLS, IP tunnelling encapsulation techniques like VXLAN, NVGRE, MPLSoGRE and others can be used for packet transportation. Also, Provider Backbone Bridging (PBB) can be combined with EVPN in order to reduce a number of MAC Advertisement routes.

### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *EVPN Route API*
- *Usage*
- *Programming*
- *EVPN Routes*

## Configuration

This section shows a way to enable EVPN family in BGP speaker and peer configuration.

### BGP Speaker

To enable EVPN support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <global>
      <config>
        <router-id>192.0.2.2</router-id>
        <as>65000</as>
      </config>
      <afi-safis>
        <afi-safi>
          <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
            ↳x:L2VPN-EVPN</afi-safi-name>
```

(continues on next page)

(continued from previous page)

```

        </afi-safi>
    </afi-safis>
</global>
</bgp>
</protocol>

```

## BGP Peer

Here is an example for BGP peer configuration with enabled EVPN family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <neighbor-address>192.0.2.1</neighbor-address>
    <afi-safis>
        <afi-safi>
            <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:L2VPN-EVPN
        </afi-safi-name>
        </afi-safi>
    </afi-safis>
</neighbor>

```

## EVPN Route API

Following tree illustrate the BGP EVPN route structure.

```

:(evpn-routes-case)
+--ro evpn-routes
    +--ro evpn-route* [route-key path-id]
        +--ro route-key                         string
        +--ro path-id                           path-id
        +--ro (evpn-choice)
            |  +--:(ethernet-a-d-route-case)
            |  |  +--ro ethernet-a-d-route
            |  |  +--ro (esi)
            |  |  |  +--:(arbitrary-case)
            |  |  |  |  +--ro arbitrary
            |  |  |  |  +--ro arbitrary      binary
            |  |  |  +--:(lacp-auto-generated-case)
            |  |  |  |  +--ro lacp-auto-generated
            |  |  |  |  +--ro ce-lacp-mac-address  yang:mac-address
            |  |  |  |  +--ro ce-lacp-port-key     uint16
            |  |  |  +--:(lan-auto-generated-case)
            |  |  |  |  +--ro lan-auto-generated
            |  |  |  |  +--ro root-bridge-mac-address  yang:mac-address
            |  |  |  |  +--ro root-bridge-priority   uint16

```

(continues on next page)

(continued from previous page)

```

| | | | +--:(mac-auto-generated-case)
| | | | | +--ro mac-auto-generated
| | | | | | +--ro system-mac-address yang:mac-address
| | | | | | +--ro local-discriminator uint24
| | | | +--:(router-id-generated-case)
| | | | | +--ro router-id-generated
| | | | | | +--ro router-id inet:ipv4-address
| | | | | | +--ro local-discriminator uint32
| | | | +--:(as-generated-case)
| | | | | +--ro as-generated
| | | | | | +--ro as inet:as-number
| | | | | | +--ro local-discriminator uint32
| | | +--ro ethernet-tag-id
| | | | +--ro vlan-id uint32
| | | +--ro mpls-label netc:mpls-label
| | +--:(mac-ip-adv-route-case)
| | | +--ro mac-ip-adv-route
| | | | +--ro (esi)
| | | | | +--:(arbitrary-case)
| | | | | | +--ro arbitrary
| | | | | | | +--ro arbitrary binary
| | | | +--:(lacp-auto-generated-case)
| | | | | +--ro lacp-auto-generated
| | | | | | +--ro ce-lACP-mac-address yang:mac-address
| | | | | | +--ro ce-lACP-port-key uint16
| | | | +--:(lan-auto-generated-case)
| | | | | +--ro lan-auto-generated
| | | | | | +--ro root-bridge-mac-address yang:mac-address
| | | | | | +--ro root-bridge-priority uint16
| | | +--:(mac-auto-generated-case)
| | | | +--ro mac-auto-generated
| | | | | +--ro system-mac-address yang:mac-address
| | | | | +--ro local-discriminator uint24
| | | +--:(router-id-generated-case)
| | | | +--ro router-id-generated
| | | | | +--ro router-id inet:ipv4-address
| | | | | +--ro local-discriminator uint32
| | | +--:(as-generated-case)
| | | | +--ro as-generated
| | | | | +--ro as inet:as-number
| | | | | +--ro local-discriminator uint32
| | +--ro ethernet-tag-id
| | | +--ro vlan-id uint32
| | +--ro mac-address yang:mac-address
| | +--ro ip-address? inet:ip-address
| | +--ro mpls-label1 netc:mpls-label
| | +--ro mpls-label2? netc:mpls-label
| | +--:(inc-multi-etherNet-tag-res-case)
| | | +--ro inc-multi-etherNet-tag-res
| | | | +--ro ethernet-tag-id
| | | | | +--ro vlan-id uint32
| | | | +--ro orig-route-ip? inet:ip-address
| | +--:(es-route-case)
| | | +--ro es-route
| | | | +--ro (esi)
| | | | | +--:(arbitrary-case)
| | | | | | +--ro arbitrary

```

(continues on next page)

(continued from previous page)

```

|   |   |   +-+ro arbitrary      binary
|   |   |   +-+:(lacp-auto-generated-case)
|   |   |   +-+ro lacp-auto-generated
|   |   |   +-+ro ce-lacp-mac-address    yang:mac-address
|   |   |   +-+ro ce-lacp-port-key     uint16
|   |   +-+:(lan-auto-generated-case)
|   |   +-+ro lan-auto-generated
|   |   +-+ro root-bridge-mac-address  yang:mac-address
|   |   +-+ro root-bridge-priority   uint16
|   |   +-+:(mac-auto-generated-case)
|   |   +-+ro mac-auto-generated
|   |   +-+ro system-mac-address    yang:mac-address
|   |   +-+ro local-discriminator  uint24
|   |   +-+:(router-id-generated-case)
|   |   +-+ro router-id-generated
|   |   +-+ro router-id           inet:ipv4-address
|   |   +-+ro local-discriminator  uint32
|   |   +-+:(as-generated-case)
|   |   +-+ro as-generated
|   |   +-+ro as                   inet:as-number
|   |   +-+ro local-discriminator  uint32
|   +-+ro orig-route-ip          inet:ip-address
+-+ro route-distinguisher       bgp-t:route-distinguisher
+-+ro attributes
    +-+ro extended-communities*
    |   +-+ro transitive?           boolean
    |   +-+ro (extended-community)?
    |   +-+:(encapsulation-case)
    |   |   +-+ro encapsulation-extended-community
    |   |   +-+ro tunnel-type      encapsulation-tunnel-type
    |   +-+:(esi-label-extended-community-case)
    |   |   +-+ro esi-label-extended-community
    |   |   +-+ro single-active-mode? boolean
    |   |   +-+ro esi-label        netc:mpls-label
    +-+:(es-import-route-extended-community-case)
    |   +-+ro es-import-route-extended-community
    |   +-+ro es-import          yang:mac-address
    +-+:(mac-mobility-extended-community-case)
    |   +-+ro mac-mobility-extended-community
    |   +-+ro static?             boolean
    |   +-+ro seq-number          uint32
    +-+:(default-gateway-extended-community-case)
    |   +-+ro default-gateway-extended-community!
    +-+:(layer-2-attributes-extended-community-case)
        +-+ro layer-2-attributes-extended-community
        +-+ro primary-pe?          boolean
        +-+ro backup-pe?           boolean
        +-+ro control-word?        boolean
        +-+ro l2-mtu                uint16
+-+ro pmsi-tunnel!
    +-+ro leaf-information-required  boolean
    +-+ro mpls-label?              netc:mpls-label
    +-+ro (tunnel-identifier)?
        +-+:(rsvp-te-p2mp-lsp)
        |   +-+ro rsvp-te-p2mp-lps
        |   +-+ro p2mp-id            uint32
        |   +-+ro tunnel-id          uint16

```

(continues on next page)

(continued from previous page)

```

|     +-+ro extended-tunnel-id      inet:ip-address
+---:(mldp-p2mp-lsp)
|     +-+ro mldp-p2mp-lsp
|     +-+ro address-family        identityref
|     +-+ro root-node-address    inet:ip-address
|     +-+ro opaque-value*
|         +-+ro opaque-type       uint8
|         +-+ro opaque-extended-type?  uint16
|         +-+ro opaque          yang:hex-string
+---:(pim-ssm-tree)
|     +-+ro pim-ssm-tree
|         +-+ro p-address        inet:ip-address
|         +-+ro p-multicast-group  inet:ip-address
+---:(pim-sm-tree)
|     +-+ro pim-sm-tree
|         +-+ro p-address        inet:ip-address
|         +-+ro p-multicast-group  inet:ip-address
+---:(bidir-pim-tree)
|     +-+ro bidir-pim-tree
|         +-+ro p-address        inet:ip-address
|         +-+ro p-multicast-group  inet:ip-address
+---:(ingress-replication)
|     +-+ro ingress-replication
|         +-+ro receiving-endpoint-address?  inet:ip-address
+---:(mldp-mp2mp-lsp)
|     +-+ro mldp-mp2mp-lsp
|         +-+ro opaque-type       uint8
|         +-+ro opaque-extended-type?  uint16
|         +-+ro opaque
...

```

## Usage

The L2VPN EVPN table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/odl-bgp-evpn:l2vpn-address-family/odl-bgp-evpn:evpn-subsequent-address-family/evpn-routes

**Method:** GET

**Response Body:**

```

<evpn-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-evpn">
  <evpn-route>
    <route-key>AxEEAcCoZAED6AAAAQAgwKhkAQ==</route-key>
    <path-id>0</path-id>
    <route-distinguisher>192.168.100.1:1000</route-distinguisher>
    <inc-multi-ethernet-tag-res>
      <ethernet-tag-id>
        <vlan-id>256</vlan-id>
      </ethernet-tag-id>
      <orig-route-ip>192.168.100.1</orig-route-ip>
    </inc-multi-ethernet-tag-res>
    <attributes>
      <ipv4-next-hop>

```

(continues on next page)

(continued from previous page)

```

<global>172.23.29.104</global>
</ipv4-next-hop>
<as-path/>
<origin>
  <value>igp</value>
</origin>
<extended-communities>
  <extended-communities>
    <transitive>true</transitive>
    <route-target-extended-community>
      <global-administrator>65504</global-administrator>
      <local-administrator>AAAD6A==</local-administrator>
    </route-target-extended-community>
  </extended-communities>
</extended-communities>
<pmsi-tunnel>
  <leaf-information-required>true</leaf-information-required>
  <mpls-label>20024</mpls-label>
  <ingress-replication>
    <receiving-endpoint-address>192.168.100.1</receiving-endpoint-
→address>
  </ingress-replication>
  </pmsi-tunnel>
</attributes>
</evpn-route>
</evpn-routes>

```

## Programming

This examples show how to originate and remove EVPN routes via programmable RIB. There are four different types of EVPN routes, and several extended communities. Routes can be used for variety of use-cases supported by BGP/MPLS EVPN, PBB EVPN and NVO EVPN. Make sure the *Application Peer* is configured first.

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/odl-bgp-evpn:12vpn-address-family/odl-bgp-evpn:evpn-subsequent-address-family/odl-bgp-evpn:evpn-routes

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <evpn-route xmlns="urn:opendaylight:params:xml:ns:yang:bgp-evpn">
2   <route-key>evpn</route-key>
3   <path-id>0</path-id>
4   <route-distinguisher>172.12.123.3:200</route-distinguisher>
5   ....
6   <attributes>
7     <ipv4-next-hop>
8       <global>199.20.166.41</global>
9     </ipv4-next-hop>
10    <as-path/>
11    <origin>
12      <value>igp</value>
13    </origin>

```

(continues on next page)

(continued from previous page)

```

14     <extended-communities>
15     ....
16     </extended-communities>
17   </attributes>
18 </evpn-route>
```

@line 4: Route Distinguisher (RD) - set to RD of the MAC-VRF advertising the NLRI, recommended format `<IP>:<VLAN_ID>`

@line 5: One of the EVPN route must be set here.

@line 15: In some cases, specific extended community presence is required. The route may carry one or more Route Target attributes.

## EVPN Routes

- Ethernet AD per ESI

```

<ethernet-a-d-route>
  <mpls-label>0</mpls-label>
  <ethernet-tag-id>
    <vlan-id>4294967295</vlan-id>
  </ethernet-tag-id>
  <arbitrary>
    <arbitrary>AAAAAAAAAAAA</arbitrary>
  </arbitrary>
</ethernet-a-d-route>
```

- Ethernet AD per EVI

```

<ethernet-a-d-route>
  <mpls-label>24001</mpls-label>
  <ethernet-tag-id>
    <vlan-id>2200</vlan-id>
  </ethernet-tag-id>
  <arbitrary>
    <arbitrary>AAAAAAAAAAAA</arbitrary>
  </arbitrary>
</ethernet-a-d-route>
```

- MAC/IP Advertisement

```

<mac-ip-adv-route>
  <arbitrary>
    <arbitrary>AAAAAAAAAAAA</arbitrary>
  </arbitrary>
  <ethernet-tag-id>
    <vlan-id>2100</vlan-id>
  </ethernet-tag-id>
  <mac-address>f2:0c:dd:80:9f:f7</mac-address>
  <ip-address>10.0.1.12</ip-address>
  <mpls-label1>299776</mpls-label1>
</mac-ip-adv-route>
```

- Inclusive Multicast Ethernet Tag

```
<inc-multi-ethernet-tag-res>
  <ethernet-tag-id>
    <vlan-id>2100</vlan-id>
  </ethernet-tag-id>
  <orig-route-ip>43.43.43.43</orig-route-ip>
</inc-multi-ethernet-tag-res>
```

- Ethernet Segment

```
<es-route>
  <orig-route-ip>43.43.43.43</orig-route-ip>
  <arbitrary>
    <arbitrary>AAAAAAAAAAAAA</arbitrary>
  </arbitrary>
</es-route>
```

### EVPN Ethernet Segment Identifier (ESI):

- **Type 0** Indicates an arbitrary 9-octet ESI.

```
<arbitrary>
  <arbitrary>AAAAAAAAAAAAA</arbitrary>
</arbitrary>
```

- **Type 1** IEEE 802.1AX LACP is used.

```
<lacp-auto-generated>
  <ce-lacp-mac-address>f2:0c:dd:80:9f:f7</ce-lacp-mac-address>
  <ce-lacp-port-key>22</ce-lacp-port-key>
</lacp-auto-generated>
```

- **Type 2** Indirectly connected hosts via a bridged LAN.

```
<lan-auto-generated>
  <root-bridge-mac-address>f2:0c:dd:80:9f:f7</root-bridge-mac-address>
  <root-bridge-priority>20</root-bridge-priority>
</lan-auto-generated>
```

- **Type 3** MAC-based ESI.

```
<mac-auto-generated>
  <system-mac-address>f2:0c:dd:80:9f:f7</system-mac-address>
  <local-discriminator>2000</local-discriminator>
</mac-auto-generated>
```

- **Type 4** Router-ID ESI

```
<router-id-generated>
  <router-id>43.43.43.43</router-id>
  <local-discriminator>2000</local-discriminator>
</router-id-generated>
```

- **Type 5** AS-based ESI

```
<as-generated>
  <as>16843009</as>
  <local-discriminator>2000</local-discriminator>
</as-generated>
```

**Attributes:****2.1.13 PSMI Attribute**

- P-Multicast Service Interface Tunnel (PSMI) attribute:

- RSVP-TE P2MP LSP

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <rsvp-te-p2mp-lsp>
        <p2mp-id>111111111111</p2mp-id>
        <tunnel-id>11111</tunnel-id>
        <extended-tunnel-id>10.10.10.10</extended-tunnel-id>
    </rsvp-te-p2mp-lsp>
</pmsi-tunnel>
```

- mLDP P2MP LSP

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <mldp-p2mp-lsp>
        <address-family xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types
        ↪">x:ipv4-address-family</address-family>
        <root-node-address>10.10.10.10</root-node-address>
        <opaque-value>
            <opaque-type>255</opaque-type>
            <opaque-extended-type>11111</opaque-extended-type>
            <opaque>aa:aa:aa</opaque>
        </opaque-value>
    </mldp-p2mp-lsp>
</pmsi-tunnel>
```

- PIM-SSM Tree

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <pim-ssm-tree>
        <p-address>11.12.13.14</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </pim-ssm-tree>
</pmsi-tunnel>
```

- PIM-SM Tree

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <pim-sm-tree>
        <p-address>1.0.0.1</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </pim-sm-tree>
</pmsi-tunnel>
```

- BIDIR-PIM Tree

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <bidir-pim-tree>
        <p-address>1.0.0.1</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </bidir-pim-tree>
</pmsi-tunnel>
```

#### – Ingress Replication

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <ingress-replication>
        <receiving-endpoint-address>172.12.123.3</receiving-endpoint-address>
    </ingress-replication>
</pmsi-tunnel>
```

#### – mLDP MP2MP LSP

```
<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <mldp-mp2mp-lsp>
        <opaque-type>255</opaque-type>
        <opaque-extended-type>11111</opaque-extended-type>
        <opaque>aa:aa</opaque>
    </mldp-mp2mp-lsp>
</pmsi-tunnel>
```

### Extended Communities:

- ESI Label Extended Community

```
<extended-communities>
    <transitive>true</transitive>
    <esi-label-extended-community>
        <single-active-mode>false</single-active-mode>
        <esi-label>24001</esi-label>
    </esi-label-extended-community>
</extended-communities>
```

- ES-Import Route Target

```
<extended-communities>
    <transitive>true</transitive>
    <es-import-route-extended-community>
        <es-import>f2:0c:dd:80:9f:f7</es-import>
    </es-import-route-extended-community>
</extended-communities>
```

- MAC Mobility Extended Community

```
<extended-communities>
    <transitive>true</transitive>
    <mac-mobility-extended-community>
```

(continues on next page)

(continued from previous page)

```

<static>true</static>
<seq-number>200</seq-number>
</mac-mobility-extended-community>
</extended-communities>

```

- Default Gateway Extended Community

```

<extended-communities>
  <transitive>true</transitive>
  <default-gateway-extended-community>
    </default-gateway-extended-community>
  </extended-communities>

```

- EVPN Layer 2 attributes extended community

```

<extended-communities>
  <transitive>false</transitive>
  <layer-2-attributes-extended-community>
    <primary-pe>true</primary-pe>
    <backup-pe>true</backup-pe>
    <control-word>true</control-word>
    <12-mtu>200</12-mtu>
  </layer-2-attributes-extended-community>
</extended-communities>

```

- BGP Encapsulation extended community

```

1  <extended-communities>
2    <transitive>false</transitive>
3    <encapsulation-extended-community>
4      <tunnel-type>vxlan</tunnel-type>
5    </encapsulation-extended-community>
6  </extended-communities>

```

@line 4: full list of tunnel types

To remove the route added above, following request can be used:

**URL:** /restconf/config/bgp-rib:application-rib/10.25.1.9/tables/bgp-types:ipv4-address-family/odl-bgp-evpn:l2vpn-address-family/odl-bgp-evpn:evpn-subsequent-address-family/odl-bgp-evpn:evpn-routes/evpn-route/evpn/0

**Method:** DELETE

Table 1: EVPN Routes Usage.

EVN Route Type	Extended Communities	Usage
<b>Ethernet Auto-discovery</b>	ESI Label, BGP Encapsulation	EVPN Layer 2 attributes
<b>MAC/IP Advertisement</b>	BGP Encapsulation, MAC Mobility, Default Gateway	Fast Convergence, Split Horizon, Aliasing
<b>Inclusive Multicast Ethernet Tag</b>	PMSI Tunnel, BGP Encapsulation	Handling of Multi-destination traffic
<b>Ethernet Segment</b>	BGP Encapsulation, ES-Import Route Target	Designated Forwarder Election

## References

- BGP MPLS-Based Ethernet VPN
- Provider Backbone Bridging Combined with Ethernet VPN
- VPWS support in EVPN
- A Network Virtualization Overlay Solution using EVPN
- Interconnect Solution for EVPN Overlay networks
- Usage and applicability of BGP MPLS based Ethernet VPN

### 2.1.14 Route Target Constraint Family

The BGP Multicast Route Target (RT) Constrain Multiprotocol extension can be used to restrict advertisement of VPN NLRI to peers that have advertised their respective Route Targets, effectively building a route distribution graph.

#### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *ROUTE-TARGET-CONSTRAIN Route API*
- *Usage*
- *Routing Policies*
- *References*

## Configuration

This section shows a way to enable ROUTE-TARGET-CONSTRAIN family in BGP speaker and peer configuration.

### BGP Speaker

To enable ROUTE-TARGET-CONSTRAIN support in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

#### Request Body:

```
<protocol xmlns="http://openconfig.net/yang/network-instance">
  <name>bgp-example</name>
  <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
  <bgp xmlns="urn:opendaylight:params:xml:ns:yang:openconfig-extensions">
    <global>
```

(continues on next page)

(continued from previous page)

```

<config>
    <router-id>192.0.2.2</router-id>
    <as>65000</as>
</config>
<afi-safis>
    <afi-safi>
        <afi-safi-name>ROUTE-TARGET-CONSTRAIN</afi-safi-name>
    </afi-safi>
</afi-safis>
</global>
</bgp>
</protocol>

```

## BGP Peer

Here is an example for BGP peer configuration with enabled ROUTE-TARGET-CONSTRAIN family.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
    <neighbor-address>192.0.2.1</neighbor-address>
    <afi-safis>
        <afi-safi>
            <afi-safi-name>ROUTE-TARGET-CONSTRAIN</afi-safi-name>
        </afi-safi>
    </afi-safis>
</neighbor>

```

## ROUTE-TARGET-CONSTRAIN Route API

Following tree illustrates the BGP ROUTE-TARGET-CONSTRAIN route structure.

```

:(route-target-constrain-routes-case)
++-rw route-target-constrain-routes
    +-rw route-target-constrain-route* [route-key path-id]
        +-rw origin-as                  inet:as-number
        +-rw (route-target-constrain-choice)
            +-:(route-target-constrain-default-case)
            |  +-rw route-target-constrain-default-route!
            +-:(route-target-constrain-route-case)
            |  +-rw route-target-extended-community
            |  +-rw global-administrator?  short-as-number
            |  +-rw local-administrator?  binary
            +-:(route-target-constrain-ipv4-route-case)
            |  +-rw route-target-ipv4
            |  +-rw global-administrator?  inet:ipv4-address

```

(continues on next page)

(continued from previous page)

```

|     +--rw local-administrator?      uint16
+--:(route-target-constrain-as-4-extended-community-case)
    +--rw as-4-route-target-extended-community
        +--rw as-4-specific-common
            +--rw as-number          inet:as-number
            +--rw local-administrator  uint16

```

## Usage

The ROUTE TARGET CONSTRAINT table in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-route-target-constrain:route-target-constrain-subsequent-bgp-route-target-constrain:route-target-constrain-routes

**Method:** GET

**Response Body:**

```

<route-target-constrain-routes xmlns=
  ↵"urn:opendaylight:params:xml:ns:yang:bgp:route:target:constrain">
  <route-target-constrain-route>
    <route-key>flow1</route-key>
    <path-id>0</path-id>
    <origin-as>64511</origin-as>
    <route-target-extended-community>
      <global-administrator>64511</global-administrator>
      <local-administrator>AAAAZQ==</local-administrator>
    </route-target-extended-community>
    <attributes>
      <ipv4-next-hop>
        <global>199.20.166.41</global>
      </ipv4-next-hop>
      <as-path/>
      <origin>
        <value>igp</value>
      </origin>
      <local-pref>
        <pref>100</pref>
      </local-pref>
    </attributes>
  </route-target-constrain-route>
</route-target-constrain-routes>

```

## Routing Policies

```

<policy-definition>
  <name>default-odl-export-policy</name>
  <statement>
  ...
  <statement>
    <name>from-external-to-external-RTC</name>
    <conditions>
      <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">

```

(continues on next page)

(continued from previous page)

```

<afi-safi-in xmlns:x=
↳ "urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">x:ROUTE-TARGET-
↳ CONSTRAIN</afi-safi-in>
    <match-role-set xmlns=
↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
        <from-role>
            <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-
↳ defined-sets/role-sets/role-set[role-set-name="only-ebgp"]</role-set>
        </from-role>
        <to-role>
            <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-
↳ defined-sets/role-sets/role-set[role-set-name="only-ebgp"]</role-set>
        </to-role>
    </match-role-set>
    </bgp-conditions>
</conditions>
<actions>
    <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
        <client-attribute-prepend xmlns=
↳ "urn:opendaylight:params:xml:ns:yang:bgp:route:target:constrain"/>
    </bgp-actions>
</actions>
</statement>
...
</statement>
<statement>
    <name>from-internal-or-rr-client-to-route-reflector</name>
    <conditions>
        <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
            <afi-safi-not-in xmlns:x=
↳ "urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions"
                xmlns=
↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">x:ROUTE-TARGET-
↳ CONSTRAIN
            </afi-safi-not-in>
            <match-role-set xmlns=
↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
                <from-role>
                    <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-
↳ defined-sets/role-sets/role-set[role-set-name="ibgp-rr-client"]</role-set>
                </from-role>
                <to-role>
                    <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-
↳ defined-sets/role-sets/role-set[role-set-name="only-rr-client"]</role-set>
                </to-role>
            </match-role-set>
            </bgp-conditions>
        </conditions>
        <actions>
            <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
                <set-cluster-id-prepend xmlns=
↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
                <set-originator-id-prepend xmlns=
↳ "urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
            </bgp-actions>
        </actions>
    </statement>

```

(continues on next page)

(continued from previous page)

```

<statement>
    <name>from-internal-or-rr-client-to-route-RTC</name>
    <conditions>
        <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
            <afi-safi-in xmlns:x=
"urn:opendaylight:params:xml:ns:yang:openconfig-extensions">x:ROUTE-TARGET-
CONSTRAIN</afi-safi-in>
            <match-role-set xmlns=
"urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy">
                <from-role>
                    <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-
defined-sets/role-sets/role-set[role-set-name="ibgp-rr-client"]</role-set>
                </from-role>
                <to-role>
                    <role-set>/rpol:routing-policy/rpol:defined-sets/bgppol:bgp-
defined-sets/role-sets/role-set[role-set-name="only-rr-client"]</role-set>
                </to-role>
            </match-role-set>
        </bgp-conditions>
    </conditions>
    <actions>
        <bgp-actions xmlns="http://openconfig.net/yang/bgp-policy">
            <set-originator-id-prepend xmlns=
"urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
            <set-next-hop>SELF</set-next-hop>
        </bgp-actions>
    </actions>
</statement>
<statement>
    <name>vpn-membership-RTC</name>
    <conditions>
        <bgp-conditions xmlns="http://openconfig.net/yang/bgp-policy">
            <afi-safi-in xmlns:x="http://openconfig.net/yang/bgp-types">x:L3VPN-
IPV4-UNICAST</afi-safi-in>
            <afi-safi-in xmlns:x="http://openconfig.net/yang/bgp-types">x:L3VPN-
IPV6-UNICAST</afi-safi-in>
            <vpn-non-member xmlns=
"urn:opendaylight:params:xml:ns:yang:odl:bgp:default:policy"/>
        </bgp-conditions>
    </conditions>
    <actions>
        <reject-route/>
    </actions>
</statement>
...
...
</policy-definition>

```

## References

- Constrained Route Distribution for Border Gateway Protocol/MultiProtocol Label Switching (BGP/MPLS) Internet Protocol (IP) Virtual Private Networks (VPNs)

## 2.1.15 Additional Path Capability

The ADD-PATH capability allows to advertise multiple paths for the same address prefix. It can help with optimal routing and routing convergence in a network by providing potential alternate or backup paths.

### Contents

- *Configuration*
  - *BGP Speaker*
  - *BGP Peer*
- *Usage*
- *References*

### Configuration

This section shows a way to enable ADD-PATH capability in BGP speaker and peer configuration.

---

**Note:** The capability is applicable for IP Unicast, IP Labeled Unicast and Flow Specification address families.

---

### BGP Speaker

To enable ADD-PATH capability in BGP plugin, first configure BGP speaker instance:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <protocol xmlns="http://openconfig.net/yang/network-instance">
2   <name>bgp-example</name>
3   <identifier xmlns:x="http://openconfig.net/yang/policy-types">x:BGP</identifier>
4   <bgp xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
5     <global>
6       <config>
7         <router-id>192.0.2.2</router-id>
8         <as>65000</as>
9       </config>
10      <afi-safis>
11        <afi-safi>
12          <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">
13            x:IPV4-UNICAST</afi-safi-name>
14            <receive>true</receive>
15            <send-max>2</send-max>
16          </afi-safi>
17        </afi-safis>
      </global>
```

(continues on next page)

(continued from previous page)

```

18   </bgp>
19 </protocol>
```

@line 14: Defines path selection strategy: *send-max* > 1 -> Advertise N Paths or *send-max* = 0 -> Advertise All Paths  
 Here is an example for update a specific family with enable ADD-PATH capability

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/global/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

<afi-safi xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:IPV4-UNICAST</afi-
  ↵safi-name>
    <receive>true</receive>
    <send-max>0</send-max>
</afi-safi>
```

## BGP Peer

Here is an example for BGP peer configuration with enabled ADD-PATH capability.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

<neighbor xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <neighbor-address>192.0.2.1</neighbor-address>
  <afi-safis>
    <afi-safi>
      <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:IPV4-
      ↵LABELLED-UNICAST</afi-safi-name>
      </afi-safi>
      <afi-safi>
        <afi-safi-name xmlns:x="http://openconfig.net.yang/bgp-types">x:IPV4-
        ↵UNICAST</afi-safi-name>
        <receive>true</receive>
        <send-max>0</send-max>
      </afi-safi>
    </afi-safis>
  </neighbor>
```

---

**Note:** The path selection strategy is not configurable on per peer basis. The send-max presence indicates a willingness

to send ADD-PATH NLRIIs to the neighbor.

---

Here is an example for update specific family BGP peer configuration with enabled ADD-PATH capability.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
<afi-safi xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
  <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-UNICAST</afi-
  ↵safi-name>
    <receive>true</receive>
    <send-max>0</send-max>
</afi-safi>
```

## Usage

The IPv4 Unicast table with enabled ADD-PATH capability in an instance of the speaker's Loc-RIB can be verified via REST:

**URL:** /restconf/operational/bgp-rib:bgp-rib/rib/bgp-example/loc-rib/tables/bgp-types:ipv4-address-family/bgp-types:unicast-subsequent-address-family/ipv4-routes

**Method:** GET

**Response Body:**

```
1 <ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet">
2   <ipv4-route>
3     <path-id>1</path-id>
4     <prefix>193.0.2.1/32</prefix>
5     <attributes>
6       <as-path></as-path>
7       <origin>
8         <value>igp</value>
9       </origin>
10      <local-pref>
11        <pref>100</pref>
12      </local-pref>
13      <ipv4-next-hop>
14        <global>10.0.0.1</global>
15      </ipv4-next-hop>
16    </attributes>
17  </ipv4-route>
18  <ipv4-route>
19    <path-id>2</path-id>
20    <prefix>193.0.2.1/32</prefix>
21    <attributes>
22      <as-path></as-path>
23      <origin>
```

(continues on next page)

(continued from previous page)

```

24      <value>igp</value>
25    </origin>
26    <local-pref>
27      <pref>100</pref>
28    </local-pref>
29    <ipv4-next-hop>
30      <global>10.0.0.2</global>
31    </ipv4-next-hop>
32  </attributes>
33 </ipv4-route>
34 </ipv4-routes>

```

@line 3: The routes with the same destination are distinguished by *path-id* attribute.

## References

- Advertisement of Multiple Paths in BGP
- Best Practices for Advertisement of Multiple Paths in IBGP

### 2.1.16 Route Refresh

The Route Refresh Capability allows to dynamically request a re-advertisement of the Adj-RIB-Out from a BGP peer. This is useful when the inbound routing policy for a peer changes and all prefixes from a peer must be reexamined against a new policy.

#### Contents

- Configuration*
- Usage*
- References*
  - *Peer Session Release*
- Configuration*
- Usage*

#### Configuration

The capability is enabled by default, no additional configuration is required.

#### Usage

To send a Route Refresh request from OpenDaylight BGP speaker instance to its neighbor, invoke RPC:

**URL:** /restconf/operations/bgp-peer-rpc:route-refresh-request

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<input xmlns="urn:opendaylight:params:xml:ns:yang:bgp-peer-rpc">
    <afi xmlns:types="urn:opendaylight:params:xml:ns:yang:bgp-types">types:ipv4-
    ↵address-family</afi>
        <safi xmlns:types="urn:opendaylight:params:xml:ns:yang:bgp-types">types:unicast-
    ↵subsequent-address-family</safi>
            <peer-ref xmlns:rib="urn:opendaylight:params:xml:ns:yang:bgp-rib">/rib:bgp-rib/
    ↵rib:rib[rib:id="bgp-example"]/rib:peer[rib:peer-id="bgp://10.25.1.9"]</peer-ref>
</input>
```

**References**

- Route Refresh Capability for BGP-4

**Peer Session Release**

BGP provides a RPC feature to release a Neighbor session.

**Configuration**

The capability is enabled by default, no additional configuration is required.

**Usage**

To release neighbor session, invoke RPC:

**URL:** /restconf/operations/bgp-peer-rpc:reset-session

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<input xmlns="urn:opendaylight:params:xml:ns:yang:bgp-peer-rpc">
    <peer-ref xmlns:rib="urn:opendaylight:params:xml:ns:yang:bgp-rib">/rib:bgp-rib/
    ↵rib:rib[rib:id="bgp-example"]/rib:peer[rib:peer-id="bgp://10.25.1.9"]</peer-ref>
</input>
```

## 2.1.17 Graceful Restart Capability

The Graceful Restart Capability helps us to minimize the negative effects on routing caused by BGP restart by allowing BGP speaker to express its ability to preserve forwarding state during BGP restart. New capability is advertised in OPEN message which contains information about Graceful Restart timer value, supported families and their forwarding state.

**Contents**

- *Configuration*
  - *Graceful Restart Timer*

– *BGP Neighbor Families Graceful Restart Configuration*

- *Usage*
- *References*

## Configuration

This section shows a way how to configure Graceful Restart Timer and enable Graceful Restart support for specific families.

---

**Note:** Graceful Restart capability is enabled by default even when no families are advertised. In that case only receiving speaker procedures applies.

---

### Graceful Restart Timer

Routing information for configured families are preserved for time given by Graceful Restart timer in seconds. This can be configured in *graceful-restart* section of *neighbor* or *peer-group* configuration.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/graceful-restart

or

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/peer-groups/peer-group/external-neighbors/graceful-restart

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

1 <graceful-restart xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions
2   >
3     <config>
4       <restart-time>60</restart-time>
5     </config>
6   </graceful-restart>
```

@line 3: value of Graceful Restart timer in seconds

---

**Note:** If case that Graceful Restart timer is configured for both neighbor and peer-group, the one from peer-group is used. If no Graceful Restart timer is configured value of HOLD timer is used.

---

## BGP Neighbor Families Graceful Restart Configuration

Preserving specific family during Graceful Restart must be enabled in *graceful-restart* section of family configuration for *neighbor* or *peer-group*.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST/graceful-restart

or

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/peer-groups/peer-group/external-neighbors/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST/graceful-restart

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <graceful-restart xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions"
2   <enable>true</enable>
3 </graceful-restart>
```

@line 3: True if we want to preserve family routing information during Graceful Restart

## Usage

In case when we are invoking Graceful Restart we act as Restarting Speaker and we are additionally postponing path selection process until end-of-rib is received for all families or Selection Deferral timer expires, whichever happens first. To perform Graceful Restart with peer, invoke RPC:

**URL:** /restconf/operations/bgp-peer-rpc:restart-gracefully

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <input xmlns="urn:opendaylight:params:xml:ns:yang:bgp-peer-rpc">
2   <peer-ref xmlns:rib="urn:opendaylight:params:xml:ns:yang:bgp-rib">/rib:rib/
3     <rib:rib[rib:id="bgp-example"]>/rib:peer[rib:peer-id="bgp://10.25.1.9"]</peer-ref>
4   <selection-deferral-time>60</selection-deferral-time>
</input>
```

@line 3: Value of Selection Deferral timer in seconds

## References

- Graceful Restart Mechanism for BGP

### 2.1.18 Long-Lived Graceful Restart Capability

The Long-Lived Graceful Restart Capability is extension to Graceful Restart that provides tools to retain stale routes for longer time upon session failure. New capability is advertised in OPEN message in conjunction with Graceful Restart Capability, which contains list of supported families and their stale timer. After session failure and Graceful Restart timer expire routing information is retained for value of Long-Lived Stale Timer.

## Contents

- Configuration
  - References

## Configuration

Long-Live Graceful Restart is enabled and configured per family in *ll-graceful-restart* section of *neighbor* or *peer-group* family configuration.

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST/graceful-restart

or

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/peer-groups/peer-group/external-neighbors/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST/graceful-restart

### **Method:** PUT

**Content-Type:** application/xml

## Request Body:

```
1 <graceful-restart xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions
 2   <enable>
 3     <config>
 4       <enable>true</enable>
 5       <ll-graceful-restart xmlns="urn:opendaylight:params:xml:ns:yang:bgp:ll-graceful-
 6         <restart">
 7           <config>
 8             <long-lived-stale-time>180</long-lived-stale-time>
 9           </config>
10         </ll-graceful-restart>
11       </config>
12     </graceful-restart>
```

@line 3: if Graceful Restart support is disabled for family only procedures for Long-Lived Graceful Restart applies

@line 6: value of Long-Lived Stale timer in seconds

## References

- Support for Long-lived BGP Graceful Restart

### 2.1.19 Operational State

The OpenDaylight BGP implementation provides a set of APIs (described below), that give its operational state refreshed periodically, by default every 5 seconds. The following APIs describe what is available starting with how to change the default refresh rate.

#### Contents

- *Operational State Configuration*
- *BGP RIB Operational State*
- *BGP RIB Families Operational State*
- *BGP Neighbors Operational State*
- *BGP Neighbor Operational State*
- *BGP Neighbor Families Operational State*
- *BGP Neighbor Family Operational State*
- *BGP Neighbor Timers Operational State*
- *BGP Neighbor Transport Operational State*
- *BGP Neighbor Error Handling Operational State*
- *BGP Neighbor Graceful Restart Operational State*
- *BGP Peer Groups Operational State*
  - *CLI*

#### Operational State Configuration

**URL:** /restconf/config/bgp-state-config:bgp-state-config

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <bgp-state-config xmlns="urn:opendaylight:params:xml:ns:yang:controller:config">
2   <config-name xmlns="urn:opendaylight:params:xml:ns:yang:bgp-state-config">
3     ↳operationalState</config-name>
4     <timer xmlns="urn:opendaylight:params:xml:ns:yang:bgp-state-config">1</timer>
5   </bgp-state-config>
```

@line 3: Time in seconds between operational state update.

## BGP RIB Operational State

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/global/state

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <state xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <as>65000</as>
3   <router-id>192.0.2.2</router-id>
4   <total-paths>0</total-paths>
5   <total-prefixes>0</total-prefixes>
6 </state>
```

@line 2: AS number of the remote peer.

@line 3: The unique protocol instance identifier.

@line 4: Total number of Paths installed on RIB (Loc-RIB)

@line 5: Total number of Prefixes installed on RIB (Loc-RIB)

## BGP RIB Families Operational State

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/global/afi-safis

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <afi-safis xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <afi-safi>
3     <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-UNICAST</
4     <afi-safi-name>
5       <state>
6         <total-paths>0</total-paths>
7         <total-prefixes>0</total-prefixes>
8       </state>
9     </afi-safi>
10    <afi-safi>
11      <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV6-UNICAST</
12      <afi-safi-name>
13        <state>
14          <total-paths>0</total-paths>
15          <total-prefixes>0</total-prefixes>
16        </state>
17      </afi-safi>
18      ....
19    </afi-safis>
```

- @line 3: Family Identifier.  
@line 5: Total number of Paths installed on RIB (Loc-RIB) per specific family.  
@line 6: Total number of Prefixes installed on RIB (Loc-RIB) per specific family.

## BGP Neighbors Operational State

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```
1 <neighbors xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <neighbor>
3     <neighbor-address>192.0.2.1</neighbor-address>
4     ....
5   </neighbor>
6   <neighbor>
7     <neighbor-address>192.0.2.2</neighbor-address>
8     ....
9   </neighbor>
10 </neighbors>
```

@line 3: IP address of the remote BGP peer. Also serves as an unique identifier of a neighbor in a list of neighbors.

## BGP Neighbor Operational State

---

**Note:** Supported Capabilities only provided when session has been established.

---

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/127.0.0.2/state

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```
1 <state xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <session-state>ESTABLISHED</session-state>
3   <supported-capabilities xmlns:x="http://openconfig.net.yang/bgp-types">x:ASN32</
4   <!--supported-capabilities>
5   <supported-capabilities xmlns:x="http://openconfig.net.yang/bgp-types">x:MPBGP</
6   <!--supported-capabilities>
7   <messages>
8     <sent>
9       <UPDATE>0</UPDATE>
        <NOTIFICATION>0</NOTIFICATION>
      </sent>
```

(continues on next page)

(continued from previous page)

```

10    <received>
11      <UPDATE>4</UPDATE>
12      <NOTIFICATION>0</NOTIFICATION>
13    </received>
14  </messages>
15 </state>
```

@line 2: Session status

@line 3-4: BGP capabilities supported ( ASN32 / MPBGP / ROUTE\_REFRESH / GRACEFUL\_RESTART / ADD\_PATHS)

@line 7: Total count of Update Messages sent

@line 8: Total count of Notification Messages sent

@line 11: Total count of Update Messages received

@line 12: Total count of Notification Messages received

## BGP Neighbor Families Operational State

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/afi-safis

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <afi-safis xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <afi-safi>
3     <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-UNICAST
4     </afi-safi-name>
5     <state>
6       <active>false</active>
7     </state>
8     <graceful-restart>
9       <state>
10        <received>true</received>
11        <11-received>true</11-received>
12        <11-advertised>true</11-advertised>
13        <11-stale-timer>180</11-stale-timer>
14        <advertised>true</advertised>
15      </state>
16    </graceful-restart>
17  </afi-safi>
18  <afi-safi>
19    <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV6-UNICAST
20    </afi-safi-name>
21    <state>
22      <active>false</active>
23      </state>
      <graceful-restart>
        <state>
```

(continues on next page)

(continued from previous page)

```

24      <received>true</received>
25      <l1-received>true</l1-received>
26      <l1-advertised>true</l1-advertised>
27      <l1-stale-timer>100</l1-stale-timer>
28      <advertised>true</advertised>
29    </state>
30  </graceful-restart>
31 </afi-safi>
32 </afi-safis>
```

@line 3: Family Identifier.

@line 5: True if family is advertized by peer.

@line 7: Graceful Restart Operational State per specific family.

@line 9: True if the peer supports graceful restart.

@line 10: True if peer supports Long-Lived graceful restart.

@line 11: True if we supports Long-Lived graceful restart.

@line 12: Value of Long-Lived stale timer in seconds for specific family

@line 13: True if we support graceful restart.

## BGP Neighbor Family Operational State

**Note:** Prefixes state is only provided once session is established.

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/afi-safis/afi-safi/openconfig-bgp-types:IPV4%2DUNICAST

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <afi-safi xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <afi-safi-name xmlns:x="http://openconfig.net/yang/bgp-types">x:IPV4-UNICAST</afi-
3   <safi-name>
4     <state>
5       <active>true</active>
6       <prefixes>
7         <installed>3</installed>
8         <sent>0</sent>
9         <received>3</received>
10        </prefixes>
11      </state>
12      <graceful-restart>
13        <state>
14          <received>true</received>
15          <l1-received>true</l1-received>
16          <l1-advertised>true</l1-advertised>
```

(continues on next page)

(continued from previous page)

```

16      <11-stale-timer>180</11-stale-timer>
17      <advertised>true</advertised>
18    </state>
19  </graceful-restart>
20</afi-safi>
```

@line 2: Family Identifier.

@line 4: True if family is advertized to and by peer.

@line 6: Total count of prefixes advertized by peer and installed (effective-rib-in).

@line 7: Total count of prefixes advertized to peer (adj-rib-out).

@line 8: Total count of prefixes advertized by peer (adj-rib-in).

## BGP Neighbor Timers Operational State

---

**Note:** State is only provided once session is established.

---

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/timers

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <timers xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <state>
3     <negotiated-hold-time>180</negotiated-hold-time>
4     <uptime>1580676</uptime>
5   </state>
6 </timers>
```

@line 3: The negotiated hold-time for the BGP session in seconds.

@line 4: Session duration since establishment in timeticks (hundredths of a second).

## BGP Neighbor Transport Operational State

---

**Note:** State is only provided once session is established.

---

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/transport

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```
1 <transport xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <state>
3     <remote-address>127.0.0.2</remote-address>
4     <remote-port>44718</remote-port>
5     <local-port>1790</local-port>
6   </state>
7 </transport>
```

@line 3: IP address of the remote BGP peer.

@line 4: Port of the remote BGP peer.

@line 5: Local port.

**BGP Neighbor Error Handling Operational State**

---

**Note:** State is only provided once session is established.

---

**Note:** Error handling not supported yet. Planned for Carbon.

---

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/error-handling

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```
1 <error-handling xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <state>
3     <erroneous-update-messages>0</erroneous-update-messages>
4   </state>
5 </error-handling>
```

@line 3: The number of BGP UPDATE messages for which the treat-as-withdraw mechanism has been applied based on erroneous message contents

**BGP Neighbor Graceful Restart Operational State**

---

**Note:** Graceful Restart not supported yet. Planned for Carbon.

---

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/graceful-restart

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <graceful-restart xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions"
2   <>
3     <state>
4       <peer-restarting>false</peer-restarting>
5       <local-restarting>false</local-restarting>
6       <peer-restart-time>5</peer-restart-time>
7       <mode>BILATERAL</mode>
8     </state>
</graceful-restart>
```

@line 3: This flag indicates whether the remote neighbor is currently in the process of restarting, and hence received routes are currently stale.

@line 4: This flag indicates whether the local neighbor is currently restarting. The flag is unset after all NLRI have been advertised to the peer, and the End-of-RIB (EOR) marker has been unset.

@line 5: The period of time (advertised by the peer) in seconds that the peer expects a restart of a BGP session to take.

@line 6: Mode of Graceful Restart operation, depending on family support advertising to peer and receiving from peer can be HELPER-ONLY (only remote peers support some families), REMOTE-HELPER (only we advertise support), BILATERAL (two-side support).

## BGP Peer Groups Operational State

**URL:** /restconf/operational/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/peer-groups

**Method:** GET

**Content-Type:** application/xml

**Response Body:**

```

1 <peer-groups>
2   <peer-group>
3     <peer-group-name>application-peers</peer-group-name>
4     <state>
5       <total-paths>0</total-paths>
6       <total-prefixes>0</total-prefixes>
7     </state>
8   </peer-group>
9 </peer-groups>
```

@line 3: Peer Group Identifier.

@line 5: At this moment the cost for count path under effect-rib-in is to high. Therefore the value is the same as total prefixes.

@line 6: Total Prefixes installed under by peers pertaining to this peer group (effective-rib-in). This count doesn't differentiate repeated prefixes.

## CLI

BGP Karaf Console (odl-bgpcep-bgp-cli) provides a CLI feature to read operational state per RIB, Neighbor and Peer Group.

```
| opendaylight-user@root> bgp:operational-state -rib example-bgp-rib  
| opendaylight-user@root> bgp:operational-state -rib example-bgp-rib -neighbor 192.0.2.1  
| opendaylight-user@root> bgp:operational-state -rib -peer-group application-peers
```

### 2.1.20 High Availability

Running OpenDaylight BGP in clustered environment brings an advantage of the plugin's high availability (HA). This section illustrates a basic scenario for HA, also presents a configuration for clustered OpenDaylight BGP.

#### Contents

- *Configuration*
- *Failover scenario*

#### Configuration

Following example shows a configuration for running BGP in clustered environment.

1. As the first step, configure (replicated *default* shard and *topology* shard if needed) and run OpenDaylight in clustered environment, install BGP and RESTCONF.
2. On one node (OpenDaylight instance), configure BGP speaker instance and neighbor. In addition, configure BGP topology exporter if required. The configuration is shared across all interconnected cluster nodes, however BGP become active only on one node. Other nodes with configured BGP serves as stand-by backups.
3. Remote peer should be configured to accept/initiate connection from/to all OpenDaylight cluster nodes with configured BGP plugin.
4. Connect remote peer, let it advertise some routes. Verify routes presence in Loc-RIB and/or BGP topology exporter instance on all nodes of the OpenDaylight cluster.

**Warning:** Replicating RIBs across the cluster nodes is causing severe scalability issue and overall performance degradation. To avoid this problems, configure BGP RIB module as a separate shard without enabled replication. Change configuration on all nodes as following (*configuration/initial*):

- **In `modules.conf` add a new module:**

```
{  
    name = "bgp_rib"  
    namespace = "urn:opendaylight:params:xml:ns:yang:bgp-rib"  
    shard-strategy = "module"  
}
```

- **In `module-shards.conf` define a new module shard:**

```
{
  name = "bgp_rib"
  shards = [
    {
      name="bgp_rib"
      replicas = [
        "member-1"
      ]
    }
  ]
}
```

**Note:** Use correct member name in module shard configuration.

## Failover scenario

Following section presents a basic BGP speaker failover scenario on 3-node OpenDaylight cluster setup.

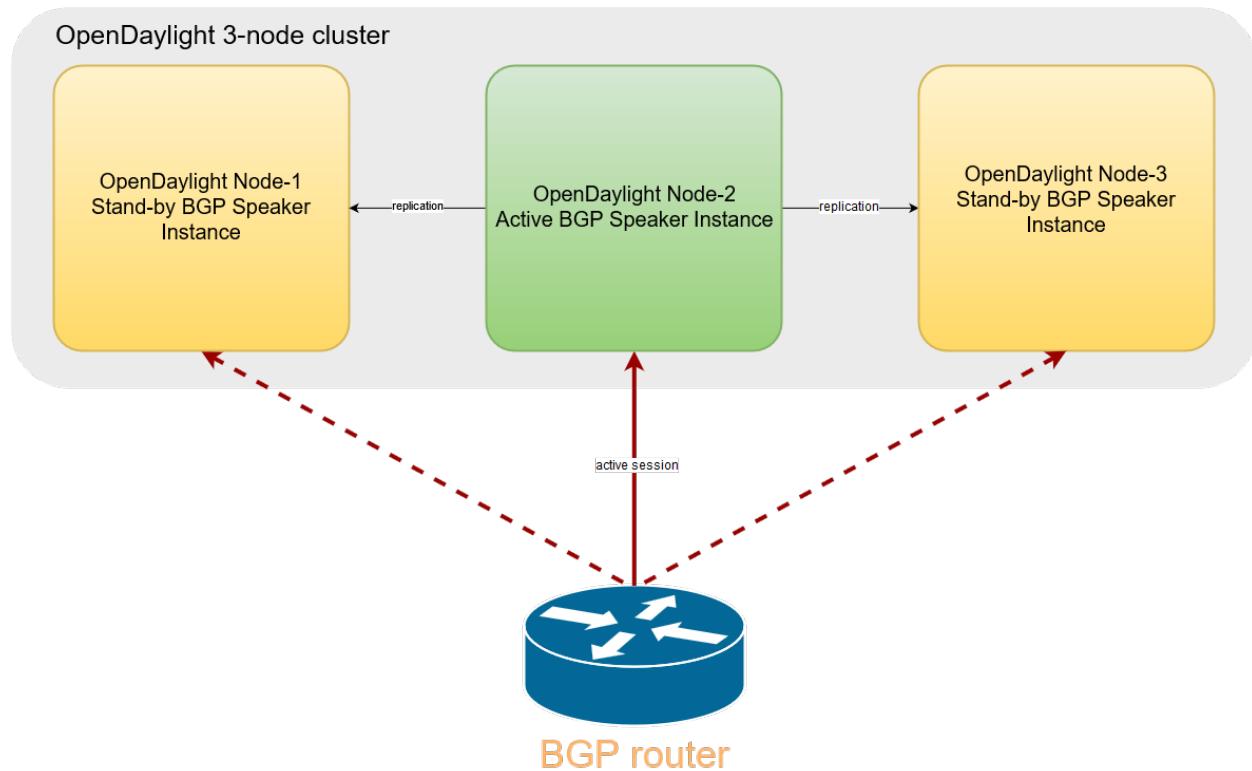


Fig. 3: Once the OpenDaylight BGP is configured, the speaker become active on one of the cluster nodes. Remote peer can establish connection with this BGP instance. Routes advertised by remote peer are replicated, hence RIBs state on all nodes is the same.

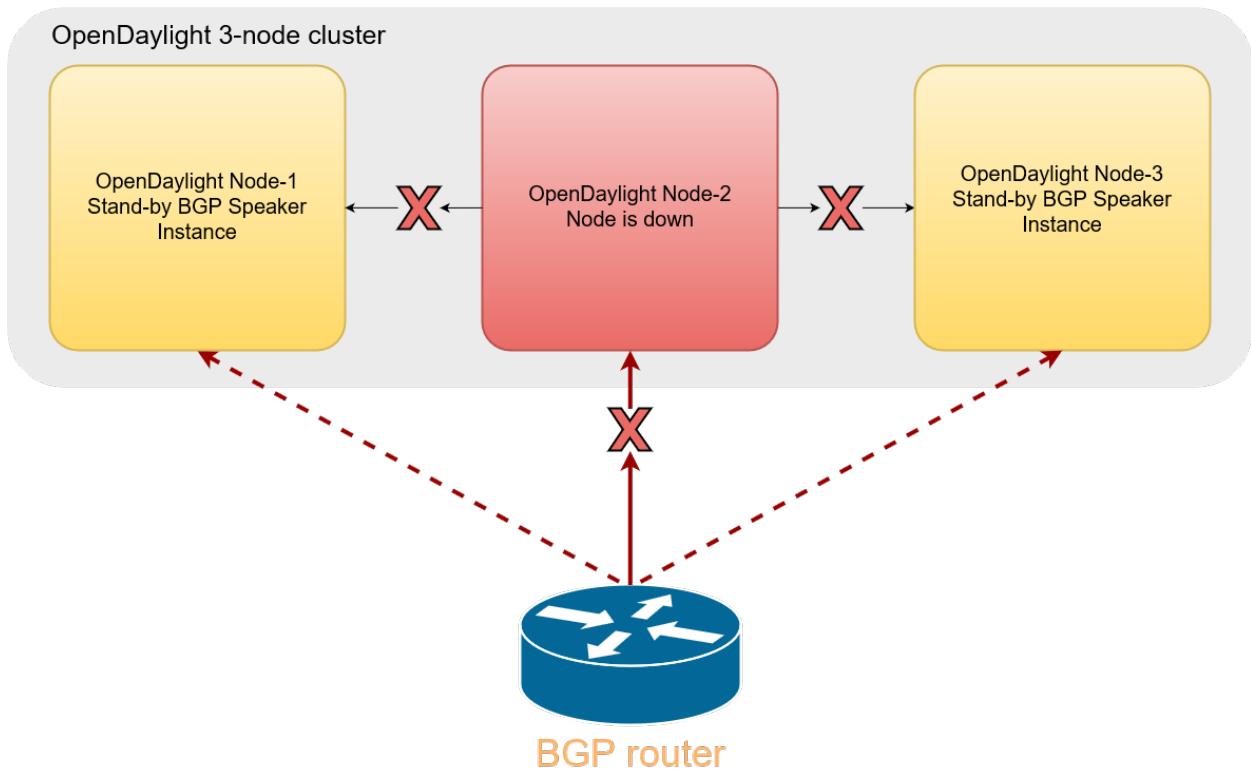


Fig. 4: In a case a cluster node, where BGP instance is running, goes down (unexpected failure, restart), active BGP session is dropped.

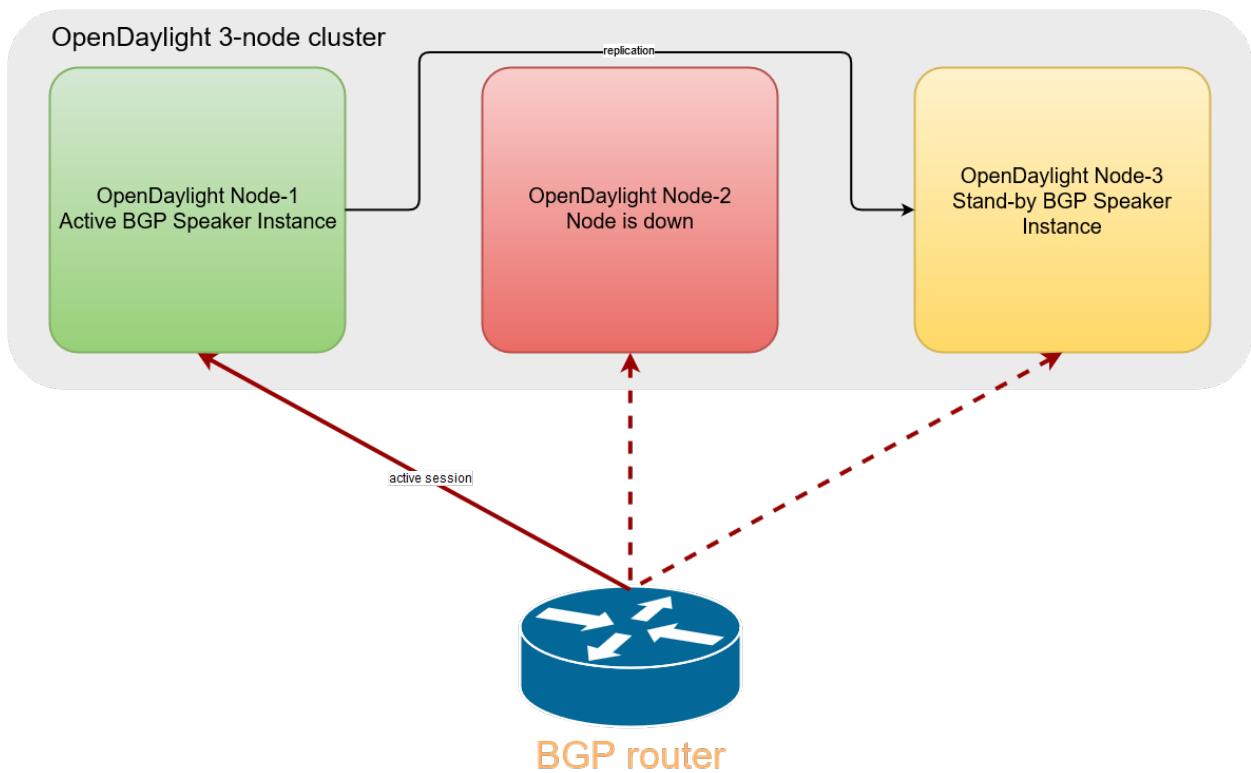


Fig. 5: Now, one of the stand-by BGP speaker instances become active. Remote peer establishes new connection and advertises routes again.

## 2.1.21 Topology Provider

This section provides an overview of the BGP topology provider service. It shows how to configure and use all available BGP topology providers. Providers are building topology view of BGP routes stored in local BGP speaker's Loc-RIB. Output topologies are rendered in a form of standardised IETF network topology model.

### Contents

- *Inet Reachability Topology*
  - *Configuration*
  - *Usage*
- *BGP Linkstate Topology*
  - *Configuration*
  - *Usage*
- *BGP Network Topology Configuration Loader*

### Inet Reachability Topology

Inet reachability topology exporter offers a mapping service from IPv4/6 routes to network topology nodes.

#### Configuration

Following example shows how to create a new instance of IPv4 BGP topology exporter:

**URL:** /restconf/config/network-topology:network-topology

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
2   <topology-id>bgp-example-ipv4-topology</topology-id>
3   <topology-types>
4     <bgp-ipv4-reachability-topology xmlns=
5       "urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-types"></bgp-ipv4-
6       reachability-topology>
7     </topology-types>
8     <rib-id xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-config">bgp-
9       example</rib-id>
10   </topology>
```

@line 2: An identifier for a topology.

@line 4: Used to identify type of the topology. In this case BGP IPv4 reachability topology.

@line 6: A name of the local BGP speaker instance.

---

The topology exporter instance can be removed in a following way:

**URL:** /restconf/config/network-topology:network-topology/topology/bgp-example-ipv4-topology

**Method:** DELETE

Following example shows how to create a new instance of IPv6 BGP topology exporter:

**URL:** /restconf/config/network-topology:network-topology

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
    <topology-id>bgp-example-ipv6-topology</topology-id>
    <topology-types>
        <bgp-ipv6-reachability-topology xmlns=
        ↵"urn:.opendaylight:params:xml:ns:yang:odl-bgp-topology-types"></bgp-ipv6-
        ↵reachability-topology>
        </topology-types>
        <rib-id xmlns="urn:.opendaylight:params:xml:ns:yang:odl-bgp-topology-config">bgp-
        ↵example</rib-id>
    </topology>
```

## Usage

Operational state of the topology can be verified via REST:

**URL:** /restconf/operational/network-topology:network-topology/topology/bgp-example-ipv4-topology

**Method:** GET

**Response Body:**

```
1  <topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
2      <topology-id>bgp-example-ipv4-topology</topology-id>
3      <server-provided>true</server-provided>
4      <topology-types>
5          <bgp-ipv4-reachability-topology xmlns=
6          ↵"urn:.opendaylight:params:xml:ns:yang:odl-bgp-topology-types"></bgp-ipv4-
7          ↵reachability-topology>
8          </topology-types>
9          <node>
10             <node-id>10.10.1.1</node-id>
11             <igp-node-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-unicast-igp-
12             ↵topology">
13                 <prefix>
14                     <prefix>10.0.0.10/32</prefix>
15                 </prefix>
16             </igp-node-attributes>
17         </node>
18     </topology>
```

@line 8: The identifier of a node in a topology. Its value is mapped from route's NEXT\_HOP attribute.

@line 11: The IP prefix attribute of the node. Its value is mapped from routes's destination IP prefix.

## BGP Linkstate Topology

BGP linkstate topology exporter offers a mapping service from BGP-LS routes to network topology nodes and links.

### Configuration

Following example shows how to create a new instance of linkstate BGP topology exporter:

**URL:** /restconf/config/network-topology:network-topology

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
<topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
    <topology-id>bgp-example-linkstate-topology</topology-id>
    <topology-types>
        <bgp-linkstate-topology xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-
        ↵topology-types"></bgp-linkstate-topology>
    </topology-types>
    <rib-id xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-config">bgp-
        ↵example</rib-id>
</topology>
```

### Usage

Operational state of the topology can be verified via REST. A sample output below represents a two node topology with two unidirectional links interconnecting those nodes.

**URL:** /restconf/operational/network-topology:network-topology/topology/bgp-example-linkstate-topology

**Method:** GET

**Response Body:**

```
<topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
    <topology-id>bgp-example-linkstate-topology</topology-id>
    <server-provided>true</server-provided>
    <topology-types>
        <bgp-linkstate-topology xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-
        ↵topology-types"></bgp-linkstate-topology>
    </topology-types>
    <node>
        <node-id>bgpls://IsisLevel2:1/type=node&amp; as=65000&amp; domain=673720360&amp;
        ↵router=0000.0000.0040</node-id>
        <termination-point>
            <tp-id>bgpls://IsisLevel2:1/type=tp&amp; ipv4=203.20.160.40</tp-id>
            <igp-termination-point-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-
            ↵unicast-igp-topology"/>
        </termination-point>
        <igp-node-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-unicast-igp-
            ↵topology">
            <prefix>
                <prefix>40.40.40.40/32</prefix>
```

(continues on next page)

(continued from previous page)

```

        <metric>10</metric>
    </prefix>
    <prefix>
        <prefix>203.20.160.0/24</prefix>
        <metric>10</metric>
    </prefix>
    <name>node1</name>
    <router-id>40.40.40.40</router-id>
    <isis-node-attributes xmlns="urn:TBD:params:xml:ns:yang:network:isis-
→topology">
        <ted>
            <te-router-id-ipv4>40.40.40.40</te-router-id-ipv4>
        </ted>
        <iso>
            <iso-system-id>MDAwMDAwMDAwMDY0</iso-system-id>
        </iso>
        <isis-node-attributes>
        </isis-node-attributes>
    </igp-node-attributes>
</node>
<node>
    <node-id>bgpls://IsisLevel2:1/type=node&amp; as=65000&amp; domain=673720360&amp;
→router=0000.0000.0039</node-id>
    <termination-point>
        <tp-id>bgpls://IsisLevel2:1/type=tp&amp; ipv4=203.20.160.39</tp-id>
        <igp-termination-point-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-
→unicast-igp-topology"/>
    </termination-point>
    <igp-node-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-unicast-igp-
→topology">
        <prefix>
            <prefix>39.39.39.39/32</prefix>
            <metric>10</metric>
        </prefix>
        <prefix>
            <prefix>203.20.160.0/24</prefix>
            <metric>10</metric>
        </prefix>
        <name>node2</name>
        <router-id>39.39.39.39</router-id>
        <isis-node-attributes xmlns="urn:TBD:params:xml:ns:yang:network:isis-
→topology">
            <ted>
                <te-router-id-ipv4>39.39.39.39</te-router-id-ipv4>
            </ted>
            <iso>
                <iso-system-id>MDAwMDAwMDAwMDg3</iso-system-id>
            </iso>
            <isis-node-attributes>
            </isis-node-attributes>
        </igp-node-attributes>
    </node>
    <link>
        <destination>
            <dest-node>bgpls://IsisLevel2:1/type=node&amp; as=65000&amp;
→domain=673720360&amp; router=0000.0000.0039</dest-node>
            <dest-tp>bgpls://IsisLevel2:1/type=tp&amp; ipv4=203.20.160.39</dest-tp>
        </destination>
        <link-id>bgpls://IsisLevel2:1/type=link&amp; local-as=65000&amp; local-
→domain=673720360&amp; local-router=0000.0000.0040&amp; remote-as=65000&amp; continues on next page)
→domain=673720360&amp; remote-router=0000.0000.0039&amp; ipv4-iface=203.20.160.40&amp;
→ip4-neigh=203.20.160.39</link-id>

```

(continued from previous page)

```

<source>
    <source-node>bgpls://IsisLevel2:1/type=node&amp; as=65000&amp;;
    ↳domain=673720360&amp; router=0000.0000.0040</source-node>
        <source-tp>bgpls://IsisLevel2:1/type=tp&amp; ipv4=203.20.160.40</source-tp>
    </source>
    <igp-link-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-unicast-igp-
    ↳topology">
        <metric>10</metric>
        <isis-link-attributes xmlns="urn:TBD:params:xml:ns:yang:network:isis-
    ↳topology">
            <ted>
                <color>0</color>
                <max-link-bandwidth>1250000.0</max-link-bandwidth>
                <max-resv-link-bandwidth>12500.0</max-resv-link-bandwidth>
                <te-default-metric>0</te-default-metric>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>0</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>1</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>2</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>3</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>4</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>5</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>6</priority>
                </unreserved-bandwidth>
                <unreserved-bandwidth>
                    <bandwidth>12500.0</bandwidth>
                    <priority>7</priority>
                </unreserved-bandwidth>
            </ted>
        </isis-link-attributes>
    </igp-link-attributes>
</link>
<link>
    <destination>
        <dest-node>bgpls://IsisLevel2:1/type=node&amp; as=65000&amp;;
        ↳domain=673720360&amp; router=0000.0000.0040</dest-node>
            <dest-tp>bgpls://IsisLevel2:1/type=tp&amp; ipv4=203.20.160.40</dest-tp>
    </destination>

```

(continues on next page)

(continued from previous page)

```

<link-id>bgpls://IsisLevel2:1/type=link&local-as=65000&local-
→domain=673720360&local-router=0000.0000.0039&remote-as=65000&remote-
→domain=673720360&remote-router=0000.0000.0040&ipv4-iface=203.20.160.39&ip
→v4-neigh=203.20.160.40</link-id>
    <source>
        <source-node>bgpls://IsisLevel2:1/type=node&as=65000&
→domain=673720360&router=0000.0000.0039</source-node>
            <source-tp>bgpls://IsisLevel2:1/type=tp&ipv4=203.20.160.39</source-tp>
        </source>
        <igp-link-attributes xmlns="urn:TBD:params:xml:ns:yang:nt:13-unicast-igp-
→topology">
            <metric>10</metric>
            <isis-link-attributes xmlns="urn:TBD:params:xml:ns:yang:network:isis-
→topology">
                <ted>
                    <color>0</color>
                    <max-link-bandwidth>1250000.0</max-link-bandwidth>
                    <max-resv-link-bandwidth>12500.0</max-resv-link-bandwidth>
                    <te-default-metric>0</te-default-metric>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>0</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>1</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>2</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>3</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>4</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>5</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>6</priority>
                    </unreserved-bandwidth>
                    <unreserved-bandwidth>
                        <bandwidth>12500.0</bandwidth>
                        <priority>7</priority>
                    </unreserved-bandwidth>
                </ted>
                </isis-link-attributes>
            </igp-link-attributes>
        </link>
    </topology>

```

## BGP Network Topology Configuration Loader

BGP Network Topology Configuration Loader allows user to define static initial configuration for a BGP protocol instance. This service will detect the creation of new configuration files following the pattern `network-topology-*.xml` under the path `etc/opendaylight/bgpcep`. Once the file is processed, the defined configuration will be available from the configuration Data Store.

---

**Note:** If the BGP topology instance is already present, no update or configuration will be applied.

---

**PATH:** `etc/opendaylight/bgpcep/network-topology-config.xml`

```
<network-topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
    <topology>
        <topology-id>example-ipv4-topology</topology-id>
        <topology-types>
            <bgp-ipv4-reachability-topology xmlns=
                ↵"urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-types"/>
            </topology-types>
            <rib-id xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-config">
                ↵example-bgp-rib</rib-id>
            </topology>
            <topology>
                <topology-id>example-ipv6-topology</topology-id>
                <topology-types>
                    <bgp-ipv6-reachability-topology xmlns=
                        ↵"urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-types"/>
                    </topology-types>
                    <rib-id xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-config">
                        ↵example-bgp-rib</rib-id>
                    </topology>
                    <topology>
                        <topology-id>example-linkstate-topology</topology-id>
                        <topology-types>
                            <bgp-linkstate-topology xmlns="urn:opendaylight:params:xml:ns:yang:odl-
                                ↵bgp-topology-types"/>
                            </topology-types>
                            <rib-id xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-topology-config">
                                ↵example-bgp-rib</rib-id>
                            </topology>
                        </topology>
                    </network-topology>
```

### 2.1.22 Test Tools

BGP test tools serve to test basic BGP functionality, scalability and performance.

#### Contents

- *BGP Test Tool*
  - *Usage*
- *BGP Application Peer Benchmark*
  - *Configuration*

- *Inject routes*
- *Remove routes*

## BGP Test Tool

The BGP Test Tool is a stand-alone Java application purposed to simulate remote BGP peers, that are capable to advertise sample routes. This application is not part of the OpenDaylight Karaf distribution, however it can be downloaded from OpenDaylight's Nexus (use latest release version):

```
https://nexus.opendaylight.org/content/repositories/opendaylight.release/org/
opendaylight/bgpcep/bgp-testtool
```

### Usage

The application can be run from command line:

```
java -jar bgp-testtool--executable.jar
```

with optional input parameters:

```
-i <BOOLEAN>, --active <BOOLEAN>
    Active initialisation of the connection, by default false.

-ho <N>, --holdtimer <N>
    In seconds, value of the desired holdtimer, by default 90.

-sc <N>, --speakersCount <N>
    Number of simulated BGP speakers, when creating each speaker, uses incremented local-address for binding, by default 0.

-ra <IP_ADDRESS:PORT,...>, --remote-address <IP_ADDRESS:PORT,...>
    A list of IP addresses of remote BGP peers, that the tool can accept or initiate connect to that address (based on the mode), by default 192.0.2.2:1790.

-la <IP_ADDRESS:PORT>, --localAddress <IP_ADDRESS:PORT>
    IP address of BGP speakers which the tools simulates, by default 192.0.2.2:0.

-pr <N>, --prefixes <N>
    Number of prefixes to be advertised by each simulated speaker

-mp <BOOLEAN>, --multiPathSupport <BOOLEAN>
    Active ADD-PATH support, by default false.

-as <N>, --as <N>
    Local AS Number, by default 64496.

-ec <EXTENDED_COMMUNITIES>, --extended_communities <EXTENDED_COMMUNITIES>
    Extended communities to be send. Format: x,x,x where x is each extended community from bgp-types.yang, by default empty.

-l1 <LOG_LEVEL>, --log_level <LOG_LEVEL>
    Log level for console output, by default INFO.
```

## BGP Application Peer Benchmark

It is a simple OpenDaylight application which is capable to inject and remove specific amount of IPv4 routes. This application is part of the OpenDaylight Karaf distribution.

### Configuration

As a first step install BGP and RESTCONF, then configure *Application Peer*. Install odl-bgpcep-bgp-benchmark feature and reconfigure BGP Application Peer Benchmark application as per following:

**URL:** /restconf/config.odl-bgp-app-peer-benchmark-config:config

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <odl-bgp-app-peer-benchmark-config xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-
2   ↵app-peer-benchmark-config">
3     <app-peer-id xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-app-peer-benchmark-
4       ↵config">10.25.1.9</app-peer-id>
5   </odl-bgp-app-peer-benchmark-config>
```

@line 2: The *Application Peer* identifier.

### Inject routes

Routes injection can be invoked via RPC:

**URL:** /restconf/operations/odl-bgp-app-peer-benchmark:add-prefix

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <input xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-app-peer-benchmark">
2   <prefix>1.1.1.1/32</prefix>
3   <count>100000</count>
4   <batchsize>2000</batchsize>
5   <nexthop>192.0.2.2</nexthop>
6 </input>
```

@line 2: A initial IPv4 prefix carried in route. Value is incremented for following routes.

@line 3: An amount of routes to be added to *Application Peer*'s programmable RIB.

@line 4: A size of the transaction batch.

@line 5: A NEXT\_HOP attribute value used in all injected routes.

**Response Body:**

```

1 <output xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-app-peer-benchmark">
2   <result>
3     <duration>4301</duration>
4     <rate>25000</rate>
5     <count>100000</count>
6   </result>
7 </output>

```

@line 3: Request duration in milliseconds.

@line 4: Writes per second rate.

@line 5: An amount of routes added to *Application Peer*'s programmable RIB.

## Remove routes

Routes deletion can be invoked via RPC:

**URL:** /restconf/operations/odl-bgp-app-peer-benchmark:delete-prefix

**Method:** POST

**Content-Type:** application/xml

### Request Body:

```

1 <input xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-app-peer-benchmark">
2   <prefix>1.1.1.1/32</prefix>
3   <count>100000</count>
4   <batchsize>2000</batchsize>
5 </input>

```

@line 2: A initial IPv4 prefix carried in route to be removed. Value is incremented for following routes.

@line 3: An amount of routes to be removed from *Application Peer*'s programmable RIB.

@line 4: A size of the transaction batch.

### Response Body:

```

<output xmlns="urn:opendaylight:params:xml:ns:yang:odl-bgp-app-peer-benchmark">
  <result>
    <duration>1837</duration>
    <rate>54500</rate>
    <count>100000</count>
  </result>
</output>

```

## 2.1.23 PSMI Attribute

- P-Multicast Service Interface Tunnel (PMISI) attribute:

- RSVP-TE P2MP LSP

```

<pmsi-tunnel>
  <leaf-information-required>true</leaf-information-required>
  <mpls-label>20024</mpls-label>
  <rsvp-te-p2mp-lsp>

```

(continues on next page)

(continued from previous page)

```

<p2mp-id>111111111111</p2mp-id>
<tunnel-id>11111</tunnel-id>
<extended-tunnel-id>10.10.10.10</extended-tunnel-id>
</rsvp-te-p2mp-lsp>
</pmsi-tunnel>

```

#### – mLDP P2MP LSP

```

<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <mldp-p2mp-lsp>
        <address-family xmlns:x="urn:opendaylight:params:xml:ns:yang:bgp-types"
            >x:ipv4-address-family</address-family>
        <root-node-address>10.10.10.10</root-node-address>
        <opaque-value>
            <opaque-type>255</opaque-type>
            <opaque-extended-type>11111</opaque-extended-type>
            <opaque>aa:aa:aa</opaque>
        </opaque-value>
    </mldp-p2mp-lsp>
</pmsi-tunnel>

```

#### – PIM-SSM Tree

```

<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <pim-ssm-tree>
        <p-address>11.12.13.14</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </pim-ssm-tree>
</pmsi-tunnel>

```

#### – PIM-SM Tree

```

<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <pim-sm-tree>
        <p-address>1.0.0.1</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </pim-sm-tree>
</pmsi-tunnel>

```

#### – BIDIR-PIM Tree

```

<pmsi-tunnel>
    <leaf-information-required>true</leaf-information-required>
    <mpls-label>20024</mpls-label>
    <bidir-pim-tree>
        <p-address>1.0.0.1</p-address>
        <p-multicast-group>10.10.10.10</p-multicast-group>
    </bidir-pim-tree>
</pmsi-tunnel>

```

#### – Ingress Replication

```
<pmsi-tunnel>
  <leaf-information-required>true</leaf-information-required>
  <mpls-label>20024</mpls-label>
  <ingress-replication>
    <receiving-endpoint-address>172.12.123.3</receiving-endpoint-address>
  </ingress-replication>
</pmsi-tunnel>
```

#### - mLDP MP2MP LSP

```
<pmsi-tunnel>
  <leaf-information-required>true</leaf-information-required>
  <mpls-label>20024</mpls-label>
  <mldp-mp2mp-lsp>
    <opaque-type>255</opaque-type>
    <opaque-extended-type>11111</opaque-extended-type>
    <opaque>aa:aa</opaque>
  </mldp-mp2mp-lsp>
</pmsi-tunnel>
```

### 2.1.24 Troubleshooting

This section offers advices in a case OpenDaylight BGP plugin is not working as expected.

#### Contents

- *BGP is not working...*
- *Bug reporting*

#### BGP is not working...

- First of all, ensure that all required features are installed, local and remote BGP configuration is correct.
- Check OpenDaylight Karaf logs:

From Karaf console:

```
log:tail
```

or open log file: data/log/karaf.log

Possibly, a reason/hint for a cause of the problem can be found there.

- Try to minimise effect of other OpenDaylight features, when searching for a reason of the problem.
- Try to set DEBUG severity level for BGP logger via Karaf console commands, in order to collect more information:

```
log:set DEBUG org.opendaylight.protocol.bgp
```

```
log:set DEBUG org.opendaylight.bgpcep.bgp
```

## Bug reporting

Before you report a bug, check BGPCEP Jira to ensure same/similar bug is not already filed there.

Write an e-mail to [bgpcep-users@lists.opendaylight.org](mailto:bgpcep-users@lists.opendaylight.org) and provide following information:

1. State OpenDaylight version
2. Describe your use-case and provide as much details related to BGP as possible
3. Steps to reproduce
4. Attach Karaf log files, optionally packet captures, REST input/output

### 2.1.25 Revised Error Handling for BGP UPDATE Messages

According to [RFC4271](#) a BGP speaker that receives an UPDATE message containing a malformed attribute is required to reset the session over which the offending attribute was received. Revised Error Handling procedures defined in [RFC7606](#) is introducing a ways to avoid negative effects of session restart. This document provides guide to configure specific approach called *treat-as-withdraw* which is treating malformed UPDATE messages as their withdrawal equivalent.

## Configuration

*Treat-as-withdraw* procedures are disabled by default. There are two ways to enable it. One via *peer-group* to affect all neighbors in that group and one via *neighbor*.

For *neighbor* configuration:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/neighbors/neighbor/192.0.2.1/error-handling

For *peer-group* configuration:

**URL:** /restconf/config/openconfig-network-instance:network-instances/network-instance/global-bgp/openconfig-network-instance:protocols/protocol/openconfig-policy-types:BGP/bgp-example/bgp/peer-groups/peer-group/external-neighbor/error-handling

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <error-handling xmlns="urn:opendaylight:params:xml:ns:yang:bgp:openconfig-extensions">
2   <config>
3     <treat-as-withdraw>true</treat-as-withdraw>
4   </config>
5 </error-handling>
```

@line 3: *True* to enable *treat-as-withdraw* procedures, *False* to disabled it

---

**Note:** If neighbor Error handling configuration in *neighbor* ALWAYS supersed *peer-group* configuration. That means if *peer-group* have error handling enabled and *neighbor* disabled, result is disabled error handling.

---

## References

- Revised Error Handling for BGP UPDATE Messages

## 2.2 BGP Monitoring Protocol User Guide

This guide contains information on how to use the OpenDaylight BGP Monitoring Protocol (BMP) plugin. It covers BMP basic concepts, supported capabilities, configuration and operations.

### 2.2.1 Overview

This section provides high-level overview of the BMP plugin, OpenDaylight implementation and BMP usage for SDN.

#### Contents

- BGP Monitoring Protocol*
- BMP in SDN*
- OpenDaylight BMP plugin*

### BGP Monitoring Protocol

The BGP Monitoring Protocol (BMP) serves to monitor BGP sessions. The BMP can be used to obtain route view instead of screen scraping. The BMP provides access to unprocessed routing information (Adj-RIB-In) and processed routes (applied inbound policy) of monitored router's peer. In addition, monitored router can provide periodic dump of statistics.

The BMP runs over TCP. Both monitored router and monitoring station can be configured as active or passive party of the connection. The passive party listens at particular port. The router can be monitored by multiple monitoring stations. BMP messages are sent by monitored router only, monitoring station supposed to collect and process data received over BMP.

### BMP in SDN

The main concept of BMP is to monitor BGP sessions - monitoring station is aware of monitored peer's status, collects statistics and analyzes them in order to provide valuable information for network operators.

Moreover, BMP provides provides peer RIBs visibility, without need to establish BGP sessions. Unprocessed routes may serve as a source of information for software-driven routing optimization. In this case, SDN controller, a BMP monitoring station, collects routing information from monitored routers. The routes are used in subsequent optimization procedures.

### OpenDaylight BMP plugin

The OpenDaylight BMP plugin provides monitoring station implementation. The plugin can establish BMP session with one or more monitored routers in order to collect routing and statistical information.

- Runtime configurable monitoring station
- Read-only routes and statistics view

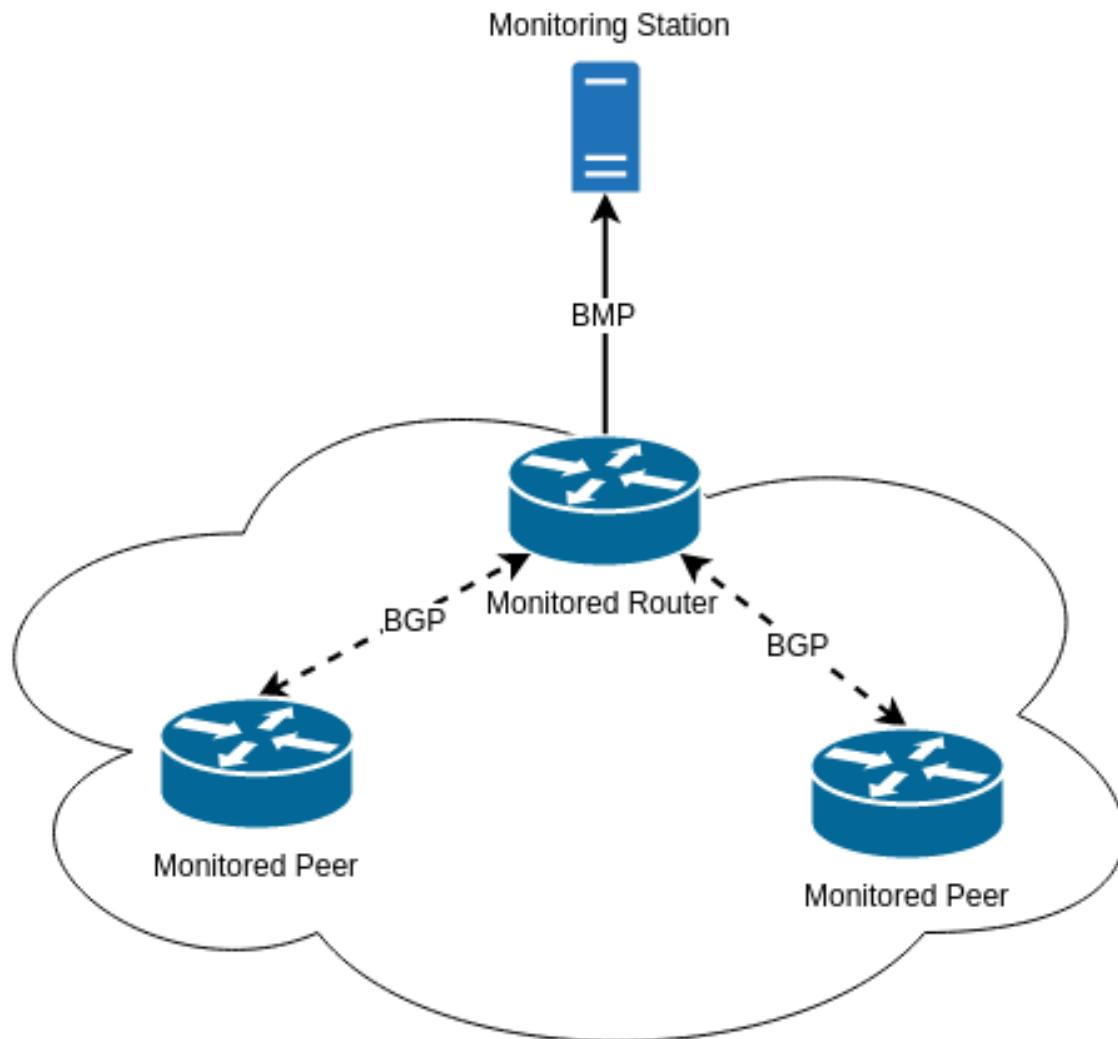


Fig. 6: The BMP overview - Monitoring Station, Monitored Router and Monitored Peers.

- Supports various routing information types

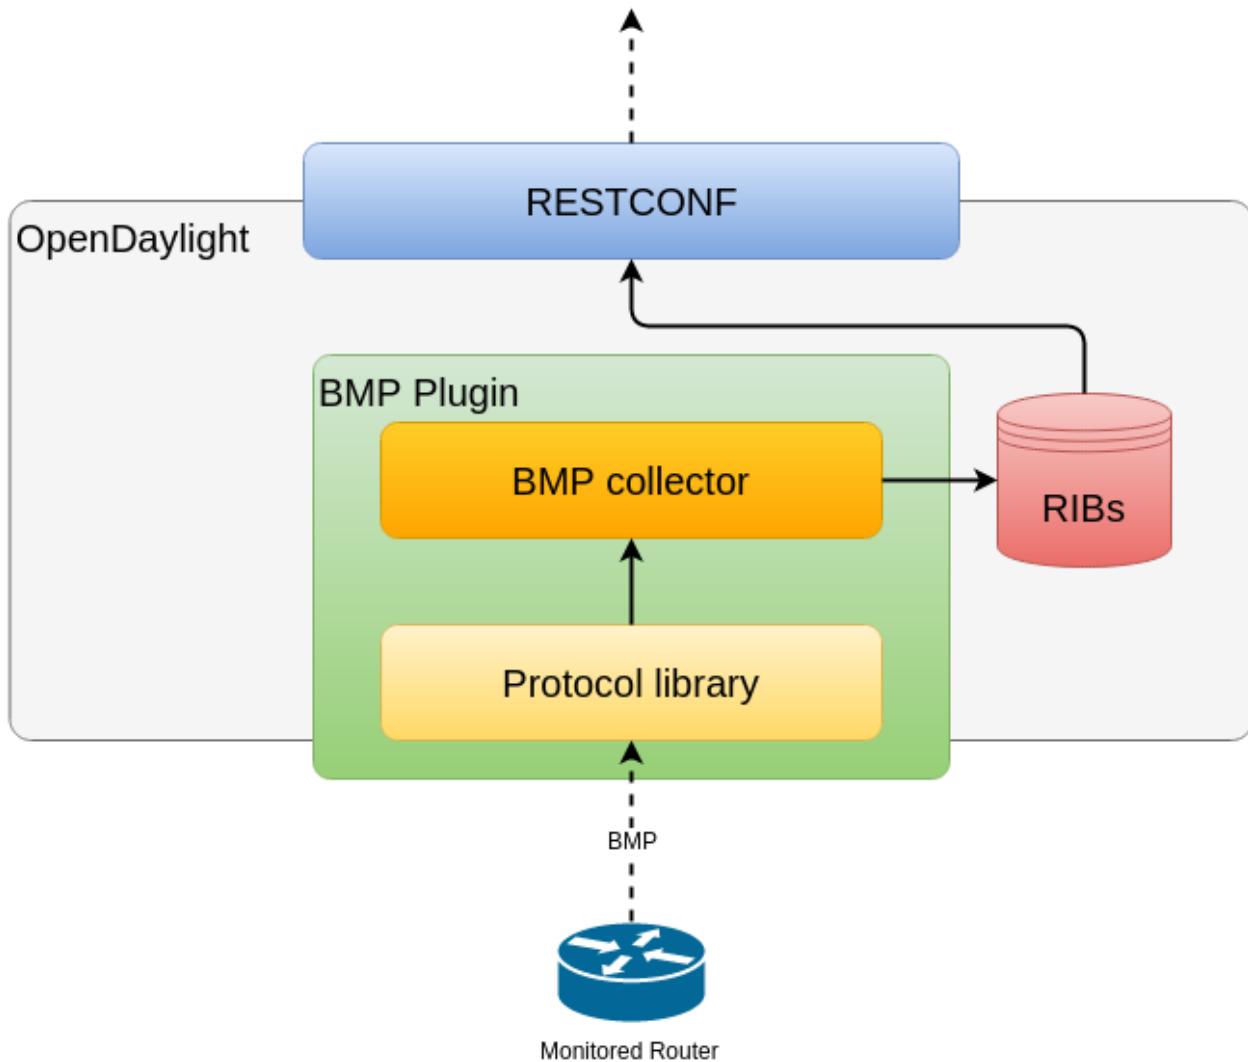


Fig. 7: OpenDaylight BMP plugin overview.

---

**Important:** The BMP plugin is not storing historical data, it provides current snapshot only.

---

## 2.2.2 List of supported capabilities

The BMP plugin implementation is based on Internet standards:

- [RFC7854](#) - BGP Monitoring Protocol (BMP)

---

**Note:** The BMP plugin is capable to process various types of routing information (IP Unicast, EVPN, L3VPN, Link-State,...). Please, see complete list in BGP user guide.

---

## 2.2.3 Running BMP

This section explains how to install BMP plugin.

1. Install BMP feature - odl-bgpcep-bmp. Also, for sake of this sample, it is required to install RESTCONF.  
In the Karaf console, type command:

```
feature:install odl-restconf odl-bgpcep-bmp
```

2. The BMP plugin contains a default configuration, which is applied after the feature starts up. One instance of BMP monitoring station is created (named *example-bmp-monitor*), and its presence can be verified via REST:

**URL:** /restconf/config.odl-bmp-monitor-config:odl-bmp-monitors/bmp-monitor-config/example-bmp-monitor

**Method:** GET

**Response Body:**

```
<bmp-monitor-config xmlns="urn:opendaylight:params:xml:ns:yang:bmp-monitor-config">
  <monitor-id>example-bmp-monitor</monitor-id>
  <server>
    <binding-port>12345</binding-port>
    <binding-address>0.0.0.0</binding-address>
  </server>
</bmp-monitor-config>
```

## 2.2.4 BMP Monitoring Station

The following section shows how to configure BMP basics, how to verify functionality and presents essential components of the plugin. Next samples demonstrate the plugin's runtime configuration capability.

The monitoring station is responsible for received BMP PDUs processing and storage. The default BMP server is listening at port 12345.

### Contents

- *Configuration*
  - *Monitoring station configuration*
  - *Active mode configuration*
  - *MD5 authentication configuration*
- *BMP Monitors Configuration Loader*
  - *BMP Monitor Configuration Example*
- *Collector DB Tree*
- *Operations*

### Configuration

This section shows the way to configure the BMP monitoring station via REST API.

## Monitoring station configuration

In order to change default's BMP monitoring station configuration, use following request.

**URL:** /restconf/config.odl-bmp-monitor-config:odl-bmp-monitors/bmp-monitor-config/example-bmp-monitor

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

1 <bmp-monitor-config xmlns="urn:opendaylight:params:xml:ns:yang:bmp-monitor-config">
2   <monitor-id>example-bmp-monitor</monitor-id>
3   <server>
4     <binding-port>12345</binding-port>
5     <binding-address>0.0.0.0</binding-address>
6   </server>
7 </bmp-monitor-config>
```

@line 4: **binding-port** - The BMP server listening port.

@line 5: **binding-address** - The BMP server biding address.

---

**Note:** User may create multiple BMP monitoring station instances at runtime.

---

## Active mode configuration

In order to enable active connection, use following request.

**URL:** /restconf/config.odl-bmp-monitor-config:odl-bmp-monitors/bmp-monitor-config/example-bmp-monitor

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

1 <bmp-monitor-config xmlns="urn:opendaylight:params:xml:ns:yang:bmp-monitor-config">
2   <monitor-id>example-bmp-monitor</monitor-id>
3   <server>
4     <binding-port>12345</binding-port>
5     <binding-address>0.0.0.0</binding-address>
6   </server>
7   <monitored-router>
8     <address>192.0.2.2</address>
9     <port>1234</port>
10    <active>true</active>
11  </monitored-router>
12 </bmp-monitor-config>
```

@line 8: **address** - The monitored router's IP address.

@line 9: **port** - The monitored router's port.

@line 10: **active** - Active mode set.

---

**Note:** User may configure active session establishment for multiple monitored routers.

---

## MD5 authentication configuration

In order to enable active connection, use following request.

**URL:** /restconf/config.odl-bmp-monitor-config:odl-bmp-monitors/bmp-monitor-config/example-bmp-monitor

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <bmp-monitor-config xmlns="urn:.opendaylight:params:xml:ns:yang:bmp-monitor-config">
2   <monitor-id>example-bmp-monitor</monitor-id>
3   <server>
4     <binding-port>12345</binding-port>
5     <binding-address>0.0.0.0</binding-address>
6   </server>
7   <monitored-router>
8     <address>192.0.2.2</address>
9     <password>changeme</password>
10   </monitored-router>
11 </bmp-monitor-config>
```

@line 8: **address** - The monitored router's IP address.

@line 9: **password** - The TCP MD5 signature.

## BMP Monitors Configuration Loader

BMP Monitors Configuration Loader allows user to define static initial configuration for a BMP protocol instance. This service will detect the creation of new configuration files following the pattern odl-bmp-monitors-\*.xml under the path etc/opendaylight/bgpcep. Once the file is processed, the defined configuration will be available from the configuration Data Store.

---

**Note:** If the BMP Monitor instance is already present, no update or configuration will be applied.

---

**PATH:** etc/opendaylight/bgpcep/odl-bmp-monitors-config.xml

```
<odl-bmp-monitors xmlns="urn:opendaylight:params:xml:ns:yang:bmp-monitor-config">
  <bmp-monitor-config>
    <monitor-id>example-bmp-monitor</monitor-id>
    <server>
      <binding-port>12345</binding-port>
      <binding-address>0.0.0.0</binding-address>
    </server>
  </bmp-monitor-config>
</odl-bmp-monitors>
```

## BMP Monitor Configuration Example

BGP provides a feature providing a BMP Monitor configuration file example. Once feature is installed defined configuration will be loaded and setup.

```
feature:install odl-bgpcep-bmp-config-example
```

## Collector DB Tree

```
module: bmp-monitor
  +-rw bmp-monitor
    +-ro monitor* [monitor-id]
      +-ro monitor-id    monitor-id
      +-ro router* [router-id]
        +-ro name?        string
        +-ro description?  string
        +-ro info?         string
        +-ro router-id     router-id
        +-ro status?       status
      +-ro peer* [peer-id]
        +-ro peer-id          rib:peer-id
        +-ro type              peer-type
        x--ro distinguisher
          | +-ro distinguisher-type?  distinguisher-type
          | +-ro distinguisher?      string
        +-ro peer-distinguisher?   union
        +-ro address            inet:ip-address
        +-ro as                 inet:as-number
        +-ro bgp-id             inet:ipv4-address
        +-ro router-distinguisher? string
        +-ro peer-session
          | +-ro local-address    inet:ip-address
          | +-ro local-port       inet:port-number
          | +-ro remote-port      inet:port-number
          | +-ro sent-open
            | | +-ro version?      protocol-version
            | | +-ro my-as-number?  uint16
            | | +-ro hold-timer     uint16
            | | +-ro bgp-identifier  inet:ipv4-address
            | | +-ro bgp-parameters*
              | | | +-ro optional-capabilities*
                | | | +-ro c-parameters
                  | | | | +-ro as4-bytes-capability
                  | | | | | +-ro as-number?  inet:as-number
                  | | | | +-ro bgp-extended-message-capability!
                  | | | | +-ro multiprotocol-capability
                  | | | | | +-ro afi?      identityref
                  | | | | | +-ro safi?     identityref
                  | | | | +-ro graceful-restart-capability
                  | | | | | +-ro restart-flags  bits
                  | | | | | +-ro restart-time   uint16
                  | | | | | +-ro tables* [afi safi]
                  | | | | | | +-ro afi        identityref
                  | | | | | | +-ro safi       identityref
                  | | | | | | +-ro afi-flags   bits
                  | | | | +-ro add-path-capability
```

(continues on next page)

(continued from previous page)

```

| | | | | +--ro address-families*
| | | | | | +--ro afi? identityref
| | | | | | +--ro safi? identityref
| | | | | | +--ro send-receive? send-receive
| | | | | +--ro route-refresh-capability!
| | +--ro received-open
| | | +--ro version? protocol-version
| | | +--ro my-as-number? uint16
| | | +--ro hold-timer uint16
| | | +--ro bgp-identifier inet:ipv4-address
| | | +--ro bgp-parameters*
| | | | +--ro optional-capabilities*
| | | | +--ro c-parameters
| | | | | +--ro as4-bytes-capability
| | | | | | +--ro as-number? inet:as-number
| | | | +--ro bgp-extended-message-capability!
| | | | +--ro multiprotocol-capability
| | | | | +--ro afi? identityref
| | | | | +--ro safi? identityref
| | | | +--ro graceful-restart-capability
| | | | | +--ro restart-flags bits
| | | | | +--ro restart-time uint16
| | | | | +--ro tables* [afi safi]
| | | | | | +--ro afi identityref
| | | | | | +--ro safi identityref
| | | | | | +--ro afi-flags bits
| | | | +--ro add-path-capability
| | | | | +--ro address-families*
| | | | | | +--ro afi? identityref
| | | | | | +--ro safi? identityref
| | | | | | +--ro send-receive? send-receive
| | | | +--ro route-refresh-capability!
| | +--ro information
| | | +--ro string-information*
| | | +--ro string-tlv
| | | | +--ro string-info? string
| | +--ro status? status
| | +--ro timestamp-sec? yang:timestamp
| | +--ro timestamp-micro? yang:timestamp
+--ro stats
| | +--ro rejected-prefixes? yang:counter32
| | +--ro duplicate-prefix-advertisements? yang:counter32
| | +--ro duplicate-withdraws? yang:counter32
| | +--ro invalidated-cluster-list-loop? yang:counter32
| | +--ro invalidated-as-path-loop? yang:counter32
| | +--ro invalidated-originator-id? yang:counter32
| | +--ro invalidated-as-confed-loop? yang:counter32
| | +--ro adj-ribs-in-routes?
| | +--ro loc-rib-routes?
| | +--ro per-afi-safi-adj-rib-in-routes
| | | +--ro afi-safi* [afi safi] yang:gauge64
| | | | +--ro afi identityref
| | | | +--ro safi identityref
| | | | +--ro count? yang:gauge64
| | +--ro per-afi-safi-loc-rib-routes
| | | +--ro afi-safi* [afi safi]
| | | | +--ro afi identityref

```

(continues on next page)

(continued from previous page)

```

|   |     +-ro safi      identityref
|   |     +-ro count?    yang:gauge64
|   +-ro updates-treated-as-withdraw?           yang:counter32
|   +-ro prefixes-treated-as-withdraw?          yang:counter32
|   +-ro duplicate-updates?                     yang:counter32
|   +-ro timestamp-sec?                        yang:timestamp
|   +-ro timestamp-micro?                      yang:timestamp
+-ro pre-policy-rib
|   +-ro tables* [afi safi]
|       +-ro afi           identityref
|       +-ro safi          identityref
|       +-ro attributes
|           | +-ro uptodate?  boolean
|           +-ro (routes)?
+-ro post-policy-rib
|   +-ro tables* [afi safi]
|       +-ro afi           identityref
|       +-ro safi          identityref
|       +-ro attributes
|           | +-ro uptodate?  boolean
|           +-ro (routes)?
+-ro mirrors
    +-ro information?      bmp-msg:mirror-information-code
    +-ro timestamp-sec?    yang:timestamp
    +-ro timestamp-micro?  yang:timestamp

```

## Operations

The BMP plugin offers view of collected routes and statistical information from monitored peers. To get top-level view of monitoring station:

**URL:** /restconf/operational/bmp-monitor:bmp-monitor/monitor/example-bmp-monitor

**Method:** GET

**Response Body:**

```

1 <bmp-monitor xmlns="urn:opendaylight:params:xml:ns:yang:bmp-monitor">
2   <monitor>
3     <monitor-id>example-bmp-monitor</monitor-id>
4     <router>
5       <router-id>10.10.10.10</router-id>
6       <name>name</name>
7       <description>monitored-router</description>
8       <info>monitored router;</info>
9       <status>up</status>
10      <peer>
11        <peer-id>20.20.20.20</peer-id>
12        <address>20.20.20.20</address>
13        <bgp-id>20.20.20.20</bgp-id>
14        <as>65000</as>
15        <type>global</type>
16        <peer-session>
17          <remote-port>1790</remote-port>
18          <timestamp-sec>0</timestamp-sec>
19          <status>up</status>

```

(continues on next page)

(continued from previous page)

```

20      <local-address>10.10.10.10</local-address>
21      <local-port>2200</local-port>
22      <received-open>
23          <hold-timer>180</hold-timer>
24          <my-as-number>65000</my-as-number>
25          <bgp-identifier>20.20.20.20</bgp-identifier>
26      </received-open>
27      <sent-open>
28          <hold-timer>180</hold-timer>
29          <my-as-number>65000</my-as-number>
30          <bgp-identifier>65000</bgp-identifier>
31      </sent-open>
32  </peer-session>
33  <pre-policy-rib>
34      <tables>
35          <afi xmlns:x="urn:.opendaylight:params:xml:ns:yang:bgp-types">
36              <x:ipv4-address-family></afi>
37              <safi xmlns:x="urn:.opendaylight:params:xml:ns:yang:bgp-types">
38                  <x:unicast-subsequent-address-family></safi>
39                  < ipv4-routes xmlns="urn:opendaylight:params:xml:ns:yang:bgp-inet
40                      <">
41                      < ipv4-route>
42                          <prefix>10.10.10.0/24</prefix>
43                          <attributes>
44                              ...
45                          </attributes>
46                      </ipv4-route>
47                  </ipv4-routes>
48                  <attributes>
49                      <uptodate>true</uptodate>
50                  </attributes>
51              </tables>
52          </pre-policy-rib>
53          <post-policy-rib>
54              ...
55          </post-policy-rib>
56          <stats>
57              <timestamp-sec>0</timestamp-sec>
58              <invalidated-cluster-list-loop>0</invalidated-cluster-list-loop>
59              <duplicate-prefix-advertisements>0</duplicate-prefix-advertisements>
60              <loc-rib-routes>100</loc-rib-routes>
61              <duplicate-withdraws>0</duplicate-withdraws>
62              <invalidated-as-confed-loop>0</invalidated-as-confed-loop>
63              <adj-ribs-in-routes>10</adj-ribs-in-routes>
64              <invalidated-as-path-loop>0</invalidated-as-path-loop>
65              <invalidated-originator-id>0</invalidated-originator-id>
66              <rejected-prefixes>8</rejected-prefixes>
67          </stats>
68      </peer>
69  </router>
70 </monitor>
71 </bmp-monitor>

```

@line 3: **monitor-id** - The BMP monitoring station instance identifier.@line 5: **router-id** - The monitored router IP address, serves as an identifier.@line 11: **peer-id** - The monitored peer's BGP identifier, serves a an identifier.

@line 12: **address** - The IP address of the peer, associated with the TCP session.

@line 13: **bgp-id** - The BGP Identifier of the peer.

@line 14: **as** - The Autonomous System number of the peer.

@line 15: **type** - Identifies type of the peer - *Global Instance, RD Instance or Local Instance*

@line 17: **remote-port** - The peer's port number associated with TCP session.

@line 20: **local-address** - The IP address of the monitored router associated with the peering TCP session.

@line 21: **local-port** - The port number of the monitored router associated with the peering TCP session.

@line 22: **received-open** - The full OPEN message received by monitored router from the peer.

@line 27: **sent-open** - The full OPEN message send by monitored router to the peer.

@line 33: **pre-policy-rib** - The Adj-RIB-In that contains unprocessed routing information.

@line 50: **post-policy-rib** - The Post-Policy Ad-RIB-In that contains routes filtered by inbound policy.

@line 53: **stats** - Contains various statistics, periodically updated by the router.

- **To view collected information from particular monitored router:** URL: /restconf/operational/bmp-monitor:bmp-monitor/monitor/example-bmp-monitor/router/10.10.10.10
- **To view collected information from particular monitored peer:** URL: /restconf/operational/bmp-monitor:bmp-monitor/monitor/example-bmp-monitor/router/10.10.10.10/peer/20.20.20.20

## 2.2.5 Test tools

BMP test tool serves to test basic BMP functionality, scalability and performance.

### BMP mock

The BMP mock is a stand-alone Java application purposed to simulate a BMP-enabled router(s) and peers. The simulator is capable to report dummy routes and statistics. This application is not part of the OpenDaylight Karaf distribution, however it can be downloaded from OpenDaylight's Nexus (use latest release version):

<https://nexus.opendaylight.org/content/repositories/opendaylight.release/org/opendaylight/bgpcep/bgp-bmp-mock>

### Usage

The application can be run from command line:

```
java -jar bgp-bmp-mock--executable.jar
```

with optional input parameters:

```
--local_address <address> (optional, default 127.0.0.1)
The IPv4 address where BMP mock is bind to.

-ra <IP_ADDRESS:PORT,...>, --remote_address <IP_ADDRESS:PORT,...>
A list of IP addresses of BMP monitoring station, by default 127.0.0.1:12345.
```

(continues on next page)

(continued from previous page)

```
--passive (optional, not present by default)
This flag enables passive mode for simulated routers.

--routers_count <0..N> (optional, default 1)
An amount of BMP routers to be connected to the BMP monitoring station.

--peers_count <0..N> (optional, default 0)
An amount of peers reported by each BMP router.

--pre_policy_routes <0..N> (optional, default 0)
An amount of "pre-policy" simple IPv4 routes reported by each peer.

--post_policy_routes <0..N> (optional, default 0)
An amount of "post-policy" simple IPv4 routes reported by each peer.

--log_level <FATAL|ERROR|INFO|DEBUG|TRACE> (optional, default INFO)
Set logging level for BMP mock.
```

## 2.2.6 Troubleshooting

This section offers advices in a case OpenDaylight BMP plugin is not working as expected.

### Contents

- *BMP is not working...*
- *Bug reporting*

#### BMP is not working...

- First of all, ensure that all required features are installed, local monitoring station and monitored router/peers configuration is correct.

To list all installed features in OpenDaylight use the following command at the Karaf console:

```
feature:list -i
```

- Check OpenDaylight Karaf logs:

From Karaf console:

```
log:tail
```

or open log file: data/log/karaf.log

Possibly, a reason/hint for a cause of the problem can be found there.

- Try to minimize effect of other OpenDaylight features, when searching for a reason of the problem.
- Try to set DEBUG severity level for BMP logger via Karaf console commands, in order to collect more information:

```
log:set DEBUG org.opendaylight.protocol.bmp
```

## Bug reporting

Before you report a bug, check [BGPCEP Jira](#) to ensure same/similar bug is not already filed there.

Write an e-mail to [bgpcep-users@lists.opendaylight.org](mailto:bgpcep-users@lists.opendaylight.org) and provide following information:

1. State OpenDaylight version
2. Describe your use-case and provide as much details related to BMP as possible
3. Steps to reproduce
4. Attach Karaf log files, optionally packet captures, REST input/output

## 2.3 PCEP User Guide

This guide contains information on how to use the OpenDaylight Path Computation Element Configuration Protocol (PCEP) plugin. The user should learn about PCEP basic concepts, supported capabilities, configuration and operations.

### 2.3.1 Overview

This section provides a high-level overview of the PCEP, SDN use-cases and OpenDaylight implementation.

#### Contents

- [Path Computation Element Communication Protocol](#)
- [PCEP in SDN](#)
- [OpenDaylight PCEP plugin](#)

### Path Computation Element Communication Protocol

The Path Computation Element (PCE) Communication Protocol (PCEP) is used for communication between a Path Computation Client (PCC) and a PCE in context of MPLS and GMPLS Traffic Engineering (TE) Label Switched Paths (LSPs). This interaction include path computation requests and computation replies. The PCE operates on a network graph, built from the (Traffic Engineering Database) TED, in order to compute paths based on the path computation request issued by the PCC. The path computation request includes the source and destination of the path and set of constraints to be applied during the computation. The PCE response contains the computed path or the computation failure reason. The PCEP operates on top the TCP, which provides reliable communication.

### PCEP in SDN

The Path Computation Element perfectly fits into the centralized SDN controller architecture. The PCE's knowledge of the availability of network resources (i.e. TED) and active LSPs awareness (LSP-DB) allows to perform automated application-driven network operations:

- LSP Re-optimization

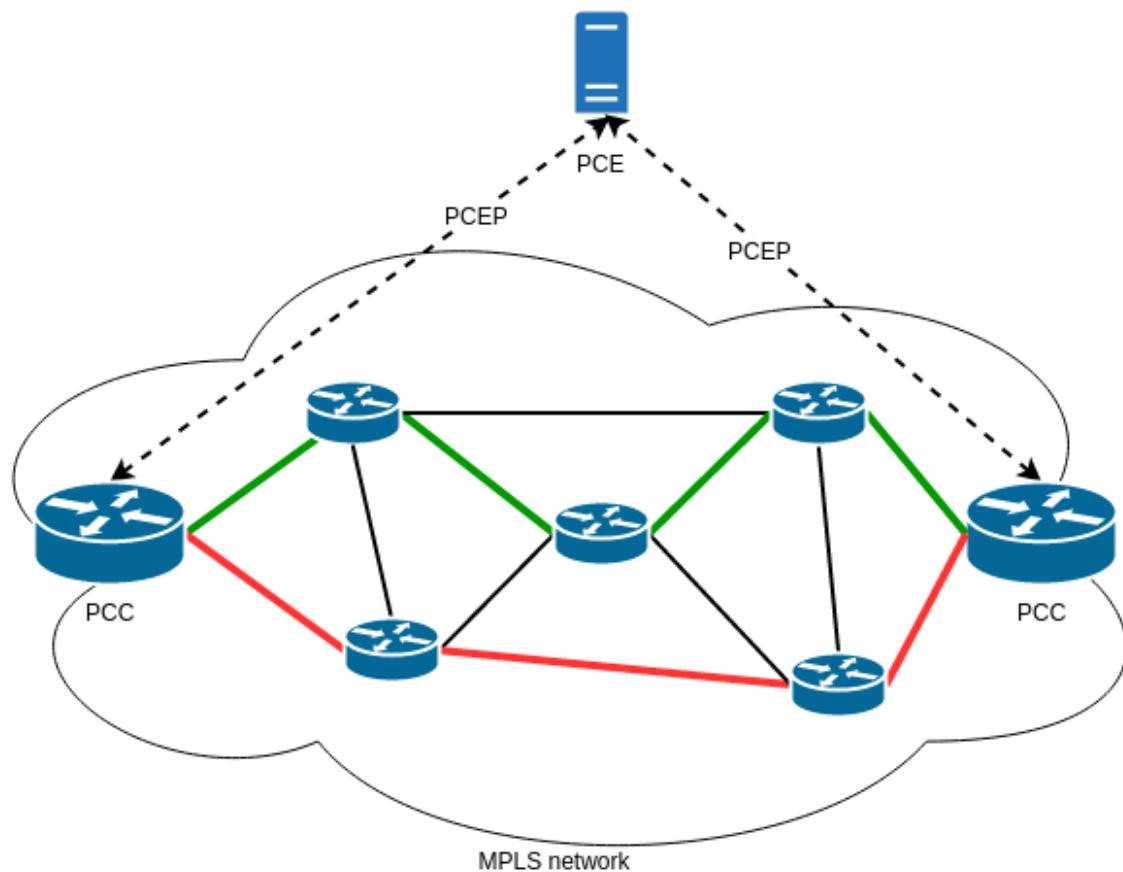


Fig. 8: PCE-based architecture.

- Resource defragmentation
- Link failure restoration
- Auto-bandwidth adjustment
- Bandwidth scheduling
- Shared Risk Link Group (SRLG) diversity maintenance

### **OpenDaylight PCEP plugin**

The OpenDaylight PCEP plugin provides all basic service units necessary to build-up a PCE-based controller. In addition, it offers LSP management functionality for Active Stateful PCE - the cornerstone for majority of PCE-enabled SDN solutions. It consists of the following components:

- Protocol library
- PCEP session handling
- Stateful PCE LSP-DB
- Active Stateful PCE LSP Operations

---

**Important:** The PCEP plugin does not provide path computational functionality and does not build TED.

---

### **2.3.2 List of supported capabilities**

- [RFC5440](#) - Path Computation Element (PCE) Communication Protocol (PCEP)
- [RFC5455](#) - Diffserv-Aware Class-Type Object for the Path Computation Element Communication Protocol
- [RFC5520](#) - Preserving Topology Confidentiality in Inter-Domain Path Computation Using a Path-Key-Based Mechanism
- [RFC5521](#) - Extensions to the Path Computation Element Communication Protocol (PCEP) for Route Exclusions
- [RFC5541](#) - Encoding of Objective Functions in the Path Computation Element Communication Protocol (PCEP)
- [RFC5557](#) - Path Computation Element Communication Protocol (PCEP) Requirements and Protocol Extensions in Support of Global Concurrent Optimization
- [RFC5886](#) - A Set of Monitoring Tools for Path Computation Element (PCE)-Based Architecture
- [RFC7470](#) - Conveying Vendor-Specific Constraints in the Path Computation Element Communication Protocol
- [RFC7896](#) - Update to the Include Route Object (IRO) Specification in the Path Computation Element Communication Protocol (PCEP)
- **[draft-ietf-pce-stateful-pce](#) - PCEP Extensions for Stateful PCE**
  - [draft-ietf-pce-pce-initiated-lsp](#) - PCEP Extensions for PCE-initiated LSP Setup in a Stateful PCE Model
  - [draft-ietf-pce-segment-routing](#) - PCEP Extension for segment routing
  - [draft-ietf-pce-lsp-setup-type](#) - PCEP Extension for path setup type
  - [draft-ietf-pce-stateful-sync-optimizations](#) - Optimizations of Label Switched Path State Synchronization Procedures for a Stateful PCE
  - [draft-sivabalan-pce-binding-label-sid](#) - Carrying Binding Label/Segment-ID in PCE-based Networks

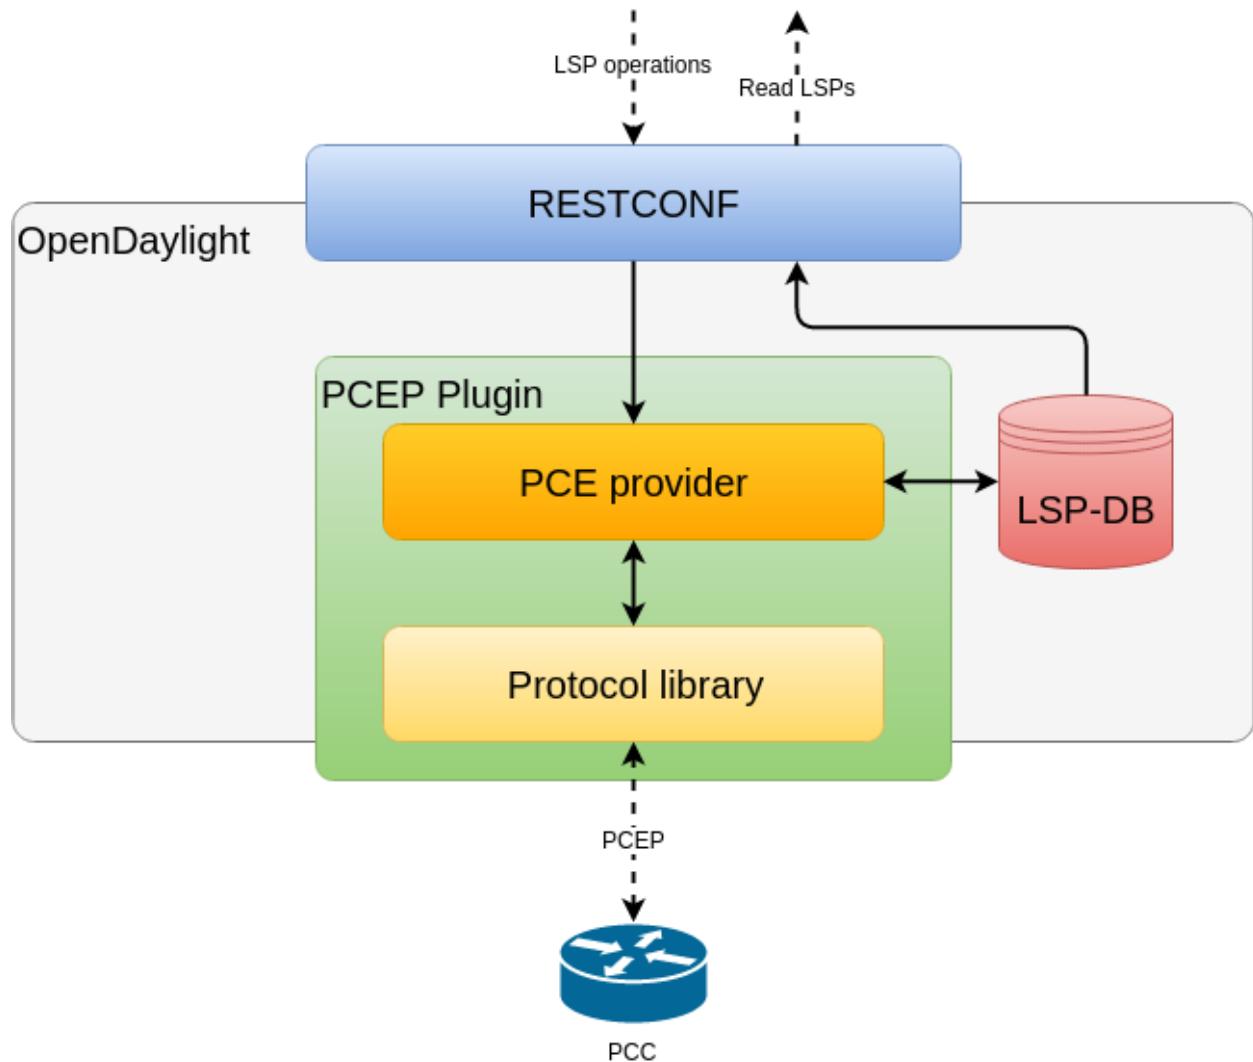


Fig. 9: OpenDaylight PCEP plugin overview.

- draft-ietf-pce-pceps - Secure Transport for PCEP
- RFC8306 - Extensions to the Path Computation Element Communication Protocol (PCEP) for Point-to-Multipoint Traffic Engineering Label Switched Paths

### 2.3.3 Running PCEP

This section explains how to install PCEP plugin.

1. Install PCEP feature - odl-bgpcep-pcep. Also, for sake of this sample, it is required to install RESTCONF. In the Karaf console, type command:

```
feature:install odl-restconf odl-bgpcep-pcep
```

2. The PCEP plugin contains a default configuration, which is applied after the feature starts up. One instance of PCEP plugin is created (named *pcep-topology*), and its presence can be verified via REST:

**URL:** restconf/operational/network-topology:network-topology/topology/pcep-topology

**Method:** GET

**Response Body:**

```
<topology xmlns="urn:TBD:params:xml:ns:yang:network-topology">
  <topology-id>pcep-topology</topology-id>
  <topology-types>
    <topology-pcep xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
      </topology-pcep>
    </topology-types>
  </topology>
```

### 2.3.4 Active Stateful PCE

The PCEP extension for Stateful PCE brings a visibility of active LSPs to PCE, in order to optimize path computation, while considering individual LSPs and their interactions. This requires state synchronization mechanism between PCE and PCC. Moreover, Active Stateful PCE is capable to address LSP parameter changes to the PCC.

#### Contents

- Configuration
  - Speaker Entity identifier
  - MD5 authentication configuration
- LSP State Database
  - LSP-DB API
  - LSP Delegation
  - LSP Update
- PCE-initiated LSP Setup
  - Configuration

- *LSP Instantiation*
- *LSP Deletion*
- *PCE-initiated LSP Delegation*
- *Segment Routing*
  - *Configuration*
  - *IANA code points*
  - *LSP Operations for PCEP SR*
- *LSP State Synchronization Optimization Procedures*
  - *Configuration*
  - *State Synchronization Avoidance*
  - *Incremental State Synchronization*
  - *PCE-triggered Initial Synchronization*
  - *PCE-triggered Re-synchronization*

## Configuration

This capability is enabled by default. No additional configuration is required.

### Speaker Entity identifier

The Speaker Entity Identifier is an optional TLV that may be included in the OPEN Object when a PCEP speaker wishes to determine if state synchronization can be skipped when a PCEP session is restarted.

**URL:** /restconf/config/network-topology:network-topology/topology/pcep-topology/node/43.43.43.43

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <node xmlns="urn:TBD:params:xml:ns:yang:network-topology">
2   <node-id>43.43.43.43</node-id>
3   <session-config xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep:config">
4     <speaker-entity-id-value xmlns=
5       "urn:opendaylight:params:xml:ns:yang:topology:pcep:sync:optimizations:config">
6     <AQIDBA==</speaker-entity-id-value>
    </session-config>
  </node>
```

@line 2: **address** - A PCC IP address.

@line 4: **Speaker Entity Identifier** - The Speaker Entity identifier assigned to PCEP Node.

## MD5 authentication configuration

The OpenDaylight PCEP implementation supports TCP MD5 for authentication. The sample configuration below shows how to set authentication password for a particular PCC.

**URL:** /restconf/config/network-topology:network-topology/topology/pcep-topology/node/43.43.43.43

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

1 <node xmlns="urn:TBD:params:xml:ns:yang:network-topology">
2   <node-id>43.43.43.43</node-id>
3   <session-config xmlns="urn:opendaylight:params:xml:ns:topology:pcep:config">
4     <password>topsecret</password>
5   </session-config>
6 </node>
```

@line 2: **address** - A PCC IP address.

@line 4: **password** - MD5 authentication phrase.

## LSP State Database

The *LSP State Database* (LSP-DB) contains an information about all LSPs and their attributes. The LSP state is synchronized between the PCC and PCE. First, initial LSP state synchronization is performed once the session between PCC and PCE is established in order to learn PCC's LPSs. This step is a prerequisite to following LSPs manipulation operations.

## LSP-DB API

```

path-computation-client
  +-+ro reported-lsp* [name]
    +-+ro name          string
    +-+ro path* [lsp-id]
      | +-+ro lsp-id           rsvp:lsp-id
      | +-+ro ero
      |   | +-+ro processing-rule? boolean
      |   | +-+ro ignore?       boolean
      |   | +-+ro subobject*
      |   |   +-+ro loose        boolean
      |   |   +-+ro (subobject-type)?
      |   |   +-+: (as-number-case)
      |   |   | +-+ro as-number
      |   |   |   +-+ro as-number    inet:as-number
      |   |   +-+: (ip-prefix-case)
      |   |   | +-+ro ip-prefix
      |   |   |   +-+ro ip-prefix    inet:ip-prefix
      |   |   +-+: (label-case)
      |   |   | +-+ro label
      |   |   |   +-+ro uni-directional  boolean
      |   |   |   +-+ro (label-type)?
      |   |   |   +-+: (type1-label-case)
```

(continues on next page)

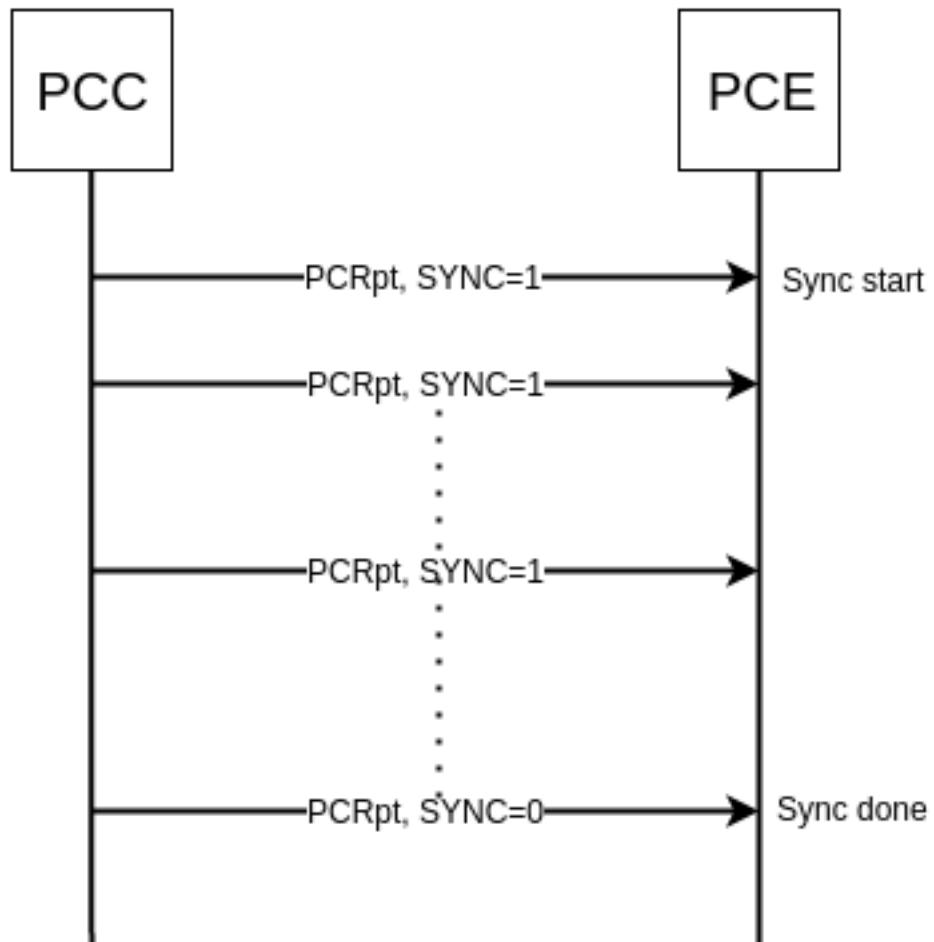


Fig. 10: LSP State Synchronization.

(continued from previous page)

```

| | | | +--ro type1-label
| | | | | +--ro type1-label      uint32
| | | +---:(generalized-label-case)
| | | | +--ro generalized-label
| | | | | +--ro generalized-label      binary
| | | +---:(waveband-switching-label-case)
| | | | | +--ro waveband-switching-label
| | | | | | +--ro end-label      uint32
| | | | | | +--ro start-label      uint32
| | | | | | +--ro waveband-id      uint32
| | | +---:(srlg-case)
| | | | +--ro srlg
| | | | | +--ro srlg-id      srlg-id
| | | +---:(unnumbered-case)
| | | | +--ro unnumbered
| | | | | +--ro router-id      uint32
| | | | | +--ro interface-id      uint32
| | | +---:(exrs-case)
| | | | +--ro exrs
| | | | | +--ro exrs*
| | | | | | +--ro mandatory?      boolean
| | | | | | +--ro attribute      enumeration
| | | | | | +--ro (subobject-type)?
| | | | | | +---:(as-number-case)
| | | | | | | +--ro as-number
| | | | | | | | +--ro as-number      inet:as-number
| | | | | | +---:(ip-prefix-case)
| | | | | | | +--ro ip-prefix
| | | | | | | | +--ro ip-prefix      inet:ip-prefix
| | | | +---:(label-case)
| | | | | +--ro label
| | | | | | +--ro uni-directional      boolean
| | | | | | +--ro (label-type)?
| | | | | | | +---:(type1-label-case)
| | | | | | | | +--ro type1-label
| | | | | | | | | +--ro type1-label      uint32
| | | | | | +---:(generalized-label-case)
| | | | | | | +--ro generalized-label
| | | | | | | | +--ro generalized-label      binary
| | | | | +---:(waveband-switching-label-case)
| | | | | | | +--ro waveband-switching-label
| | | | | | | | +--ro end-label      uint32
| | | | | | | | +--ro start-label      uint32
| | | | | | | | +--ro waveband-id      uint32
| | | +---:(srlg-case)
| | | | +--ro srlg
| | | | | +--ro srlg-id      srlg-id
| | | +---:(unnumbered-case)
| | | | +--ro unnumbered
| | | | | +--ro router-id      uint32
| | | | | +--ro interface-id      uint32
| | | +---:(path-key-case)
| | | | +--ro path-key
| | | | | +--ro pce-id      pce-id
| | | | | +--ro path-key      path-key
| | +--ro lsqa
| | | +--ro processing-rule?      boolean

```

(continues on next page)

(continued from previous page)

```

| | +--ro ignore?                      boolean
| | +--ro hold-priority?                uint8
| | +--ro setup-priority?               uint8
| | +--ro local-protection-desired?   boolean
| | +--ro label-recording-desired?   boolean
| | +--ro se-style-desired?           boolean
| | +--ro session-name?                string
| | +--ro include-any?                 attribute-filter
| | +--ro exclude-any?                 attribute-filter
| | +--ro include-all?                 attribute-filter
| | +--ro tlvs
| |     +--ro vendor-information-tlv*
| |         +--ro enterprise-number?  iana:enterprise-number
| |         +--ro (enterprise-specific-information)?
| +--ro bandwidth
| | +--ro processing-rule?            boolean
| | +--ro ignore?                   boolean
| | +--ro bandwidth?                netc:bandwidth
| +--ro reoptimization-bandwidth
| | +--ro processing-rule?            boolean
| | +--ro ignore?                   boolean
| | +--ro bandwidth?                netc:bandwidth
| +--ro metrics*
| | +--ro metric
| |     +--ro processing-rule?      boolean
| |     +--ro ignore?              boolean
| |     +--ro metric-type          uint8
| |     +--ro bound?                boolean
| |     +--ro computed?            boolean
| |     +--ro value?                ieee754:float32
| +--ro iro
| | +--ro processing-rule?            boolean
| | +--ro ignore?                   boolean
| | +--ro subobject*
| |     +--ro loose                 boolean
| |     +--ro (subobject-type)?
| |         +--:(as-number-case)
| |             | +--ro as-number
| |                 | +--ro as-number    inet:as-number
| |         +--:(ip-prefix-case)
| |             | +--ro ip-prefix
| |                 | +--ro ip-prefix    inet:ip-prefix
| |         +--:(label-case)
| |             | +--ro label
| |                 | +--ro uni-directional      boolean
| |                 | +--ro (label-type)?
| |                     +--:(type1-label-case)
| |                         | +--ro type1-label
| |                             | +--ro type1-label    uint32
| |                         +--:(generalized-label-case)
| |                             | +--ro generalized-label
| |                                 | +--ro generalized-label    binary
| |                             +--:(waveband-switching-label-case)
| |                                 | +--ro waveband-switching-label
| |                                     | +--ro end-label        uint32
| |                                     | +--ro start-label       uint32
| |                                     | +--ro waveband-id       uint32

```

(continues on next page)

(continued from previous page)

```

| |      +---:(srlg-case)
| |      | +-+ro srlg
| |      |     +-+ro srlg-id      srlg-id
| |      +---:(unnumbered-case)
| |      | +-+ro unnumbered
| |      |     +-+ro router-id      uint32
| |      |     +-+ro interface-id    uint32
| |      +---:(exrs-case)
| |      | +-+ro exrs
| |      |     +-+ro exrs*
| |      |       +-+ro mandatory?    boolean
| |      |       +-+ro attribute      enumeration
| |      |       +-+ro (subobject-type)?
| |      |         +---:(as-number-case)
| |      |         | +-+ro as-number
| |      |         |     +-+ro as-number      inet:as-number
| |      |         +---:(ip-prefix-case)
| |      |         | +-+ro ip-prefix
| |      |         |     +-+ro ip-prefix      inet:ip-prefix
| |      |         +---:(label-case)
| |      |         | +-+ro label
| |      |         |     +-+ro uni-directional      boolean
| |      |         |     +-+ro (label-type)?
| |      |           +---:(type1-label-case)
| |      |           | +-+ro type1-label
| |      |           |     +-+ro type1-label      uint32
| |      |           +---:(generalized-label-case)
| |      |           | +-+ro generalized-label
| |      |           |     +-+ro generalized-label      binary
| |      |           +---:(waveband-switching-label-case)
| |      |             +-+ro waveband-switching-label
| |      |               +-+ro end-label      uint32
| |      |               +-+ro start-label     uint32
| |      |               +-+ro waveband-id     uint32
| |      +---:(srlg-case)
| |      | +-+ro srlg
| |      |     +-+ro srlg-id      srlg-id
| |      +---:(unnumbered-case)
| |      |     +-+ro unnumbered
| |      |       +-+ro router-id      uint32
| |      |       +-+ro interface-id    uint32
| |      +---:(path-key-case)
| |      |     +-+ro path-key
| |      |       +-+ro pce-id        pce-id
| |      |       +-+ro path-key      path-key
| |     +-+ro rro
| |     +-+ro processing-rule?    boolean
| |     +-+ro ignore?          boolean
| |     +-+ro subobject*
| |     |     +-+ro protection-available?  boolean
| |     |     +-+ro protection-in-use?   boolean
| |     |     +-+ro (subobject-type)?
| |     |       +---:(ip-prefix-case)
| |     |       | +-+ro ip-prefix
| |     |       |     +-+ro ip-prefix      inet:ip-prefix
| |     |       +---:(label-case)
| |     |       | +-+ro label

```

(continues on next page)

(continued from previous page)

	+--ro uni-directional	boolean
	+--ro (label-type) ?	
	+--:(type1-label-case)	
	+--ro type1-label	
	+--ro type1-label	uint32
	+--:(generalized-label-case)	
	+--ro generalized-label	
	+--ro generalized-label	binary
	+--:(waveband-switching-label-case)	
	+--ro waveband-switching-label	
	+--ro end-label	uint32
	+--ro start-label	uint32
	+--ro waveband-id	uint32
	+--ro global?	boolean
	+--:(unnumbered-case)	
	+--ro unnumbered	
	+--ro router-id	uint32
	+--ro interface-id	uint32
	+--:(path-key-case)	
	+--ro path-key	
	+--ro pce-id	pce-id
	+--ro path-key	path-key
	+--ro xro	
	+--ro processing-rule?	boolean
	+--ro ignore?	boolean
	+--ro flags	bits
	+--ro subobject*	
	+--ro mandatory?	boolean
	+--ro attribute	enumeration
	+--ro (subobject-type) ?	
	+--:(as-number-case)	
	+--ro as-number	
	+--ro as-number	inet:as-number
	+--:(ip-prefix-case)	
	+--ro ip-prefix	
	+--ro ip-prefix	inet:ip-prefix
	+--:(label-case)	
	+--ro label	
	+--ro uni-directional	boolean
	+--ro (label-type) ?	
	+--:(type1-label-case)	
	+--ro type1-label	
	+--ro type1-label	uint32
	+--:(generalized-label-case)	
	+--ro generalized-label	
	+--ro generalized-label	binary
	+--:(waveband-switching-label-case)	
	+--ro waveband-switching-label	
	+--ro end-label	uint32
	+--ro start-label	uint32
	+--ro waveband-id	uint32
	+--:(srlg-case)	
	+--ro srlg	
	+--ro srlg-id	srlg-id
	+--:(unnumbered-case)	
	+--ro unnumbered	
	+--ro router-id	uint32

(continues on next page)

(continued from previous page)

```

| |           +-ro interface-id      uint32
| +-ro of
| |   +-ro processing-rule?    boolean
| |   +-ro ignore?            boolean
| |   +-ro code                of-id
| |   +-ro tlvs
| |     +-ro vendor-information-tlv*
| |       +-ro enterprise-number?  iana:enterprise-number
| |       +-ro (enterprise-specific-information)?
| +-ro class-type
|   +-ro processing-rule?    boolean
|   +-ro ignore?            boolean
|   +-ro class-type        class-type
+-ro metadata
+-ro lsp
| +-ro processing-rule?    boolean
| +-ro ignore?            boolean
| +-ro tlvs
| |   +-ro lsp-error-code
| |     +-ro error-code?      uint32
| |   +-ro lsp-identifiers
| |     +-ro lsp-id?         rsvp:lsp-id
| |     +-ro tunnel-id?      rsvp:tunnel-id
| |     +-ro (address-family)?
| |       +-:(ipv4-case)
| |         | +-ro ipv4
| |           +-ro ipv4-tunnel-sender-address      inet:ipv4-address
| |           +-ro ipv4-extended-tunnel-id        rsvp:ipv4-extended-
˓→tunnel-id
| |   |   +-ro ipv4-tunnel-endpoint-address      inet:ipv4-address
| |   +-:(ipv6-case)
| |     +-ro ipv6
| |       +-ro ipv6-tunnel-sender-address      inet:ipv6-address
| |       +-ro ipv6-extended-tunnel-id        rsvp:ipv6-extended-
˓→tunnel-id
| |   |   +-ro ipv6-tunnel-endpoint-address      inet:ipv6-address
| |   +-ro rsvp-error-spec
| |   |   +-ro (error-type)?
| |   |     +-:(rsvp-case)
| |   |       | +-ro rsvp-error
| |   |     +-:(user-case)
| |   |       +-ro user-error
| |   +-ro symbolic-path-name
| |   |   +-ro path-name?      symbolic-path-name
| | o--ro vs-tlv
| |   |   +-ro enterprise-number?  iana:enterprise-number
| |   |   +-ro (vendor-payload)?
| |   +-ro vendor-information-tlv*
| |     +-ro enterprise-number?  iana:enterprise-number
| |     +-ro (enterprise-specific-information)?
| |   +-ro path-binding
| |     x--ro binding-type?      uint8
| |     x--ro binding-value?      binary
| |     +-ro (binding-type-value)?
| |       +-:(mpls-label)
| |         | +-ro mpls-label?      netc:mpls-label
| |         +-:(mpls-label-entry)

```

(continues on next page)

(continued from previous page)

	++-ro label?	netc:mpls-label
	++-ro traffic-class?	uint8
	++-ro bottom-of-stack?	boolean
	++-ro time-to-live?	uint8
+--ro	plsp-id?	plsp-id
+--ro	delegate?	boolean
+--ro	sync?	boolean
+--ro	remove?	boolean
+--ro	administrative?	boolean
+--ro	operational?	operational-status
+--ro	path-setup-type	
+--ro	pst?	uint8

The LSP-DB is accessible via RESTCONF. The PCC's LSPs are stored in the pcep-topology while the session is active. In a next example, there is one PCEP session with PCC identified by its IP address (43.43.43.43) and one reported LSP (*foo*).

**URL:** /restconf/operational/network-topology:network-topology/topology/pcep-topology/node/pcc:%2F%2F43.43.43.43

**Method:** GET

**Response Body:**

```

1 <node>
2   <node-id>pcc://43.43.43.43</node-id>
3   <path-computation-client>
4     <ip-address>43.43.43.43</ip-address>
5     <state-sync>synchronized</state-sync>
6     <stateful-tlv>
7       <stateful>
8         <lsp-update-capability>true</lsp-update-capability>
9       </stateful>
10      </stateful-tlv>
11      <reported-lsp>
12        <name>foo</name>
13        <lsp>
14          <operational>up</operational>
15          <sync>true</sync>
16          <plsp-id>1</plsp-id>
17          <create>false</create>
18          <administrative>true</administrative>
19          <remove>false</remove>
20          <delegate>true</delegate>
21          <tlvs>
22            <lsp-identifiers>
23              <ipv4>
24                <ipv4-tunnel-sender-address>43.43.43.43</ipv4-tunnel-sender-
25                <address>
26                  <ipv4-tunnel-endpoint-address>39.39.39.39</ipv4-tunnel-endpoint-
27                <address>
28                  <ipv4-extended-tunnel-id>39.39.39.39</ipv4-extended-tunnel-id>
29                  </ipv4>
30                  <tunnel-id>1</tunnel-id>
31                  <lsp-id>1</lsp-id>
32                </lsp-identifiers>

```

(continues on next page)

(continued from previous page)

```

31      <symbolic-path-name>
32          <path-name>Zm9v</path-name>
33      </symbolic-path-name>
34  </tlvs>
35  </lsp>
36  <ero>
37      <subobject>
38          <loose>false</loose>
39          <ip-prefix>
40              <ip-prefix>201.20.160.40/32</ip-prefix>
41          </ip-prefix>
42      </subobject>
43      <subobject>
44          <loose>false</loose>
45          <ip-prefix>
46              <ip-prefix>195.20.160.39/32</ip-prefix>
47          </ip-prefix>
48      </subobject>
49      <subobject>
50          <loose>false</loose>
51          <ip-prefix>
52              <ip-prefix>39.39.39.39/32</ip-prefix>
53          </ip-prefix>
54      </subobject>
55  </ero>
56  </reported-lsp>
57 </path-computation-client>
58 </node>
```

@line 2: **node-id** The PCC identifier.@line 4: **ip-address** IP address of the PCC.@line 5: **state-sync** Synchronization status of the PCC's LSPs. The *synchronized* indicates the State Synchronization is done.@line 8: **lsp-update-capability** - Indicates that PCC allows LSP modifications.@line 12: **name** - Textual representation of LPS's name.@line 14: **operational** - Represent operational status of the LSP:

- *down* - not active.
- *up* - signaled.
- *active* - up and carrying traffic.
- *going-down* - LSP is being torn down, resources are being released.
- *going-up* - LSP is being signaled.

@line 15: **sync** - The flag set by PCC during LSPs State Synchronization.@line 16: **plsp-id** - A PCEP-specific identifier for the LSP. It is assigned by PCC and it is constant for a lifetime of a PCEP session.@line 17: **create** - The *false* indicates that LSP is PCC-initiated.@line 18: **administrative** - The flag indicates target operational status of the LSP.@line 20: **delegate** - The delegate flag indicates that the PCC is delegating the LSP to the PCE.

- @line 24: **ipv4-tunnel-sender-address** - Contains the sender node's IP address.
- @line 25: **ipv4-tunnel-endpoint-address** - Contains the egress node's IP address.
- @line 26: **ipv4-extended-tunnel-id** - The *Extended Tunnel ID* identifier.
- @line 28: **tunnel-id** - The *Tunnel ID* identifier.
- @line 29: **lsp-id** - The *LSP ID* identifier.
- @line 32: **path-name** - The symbolic name for the LSP.
- @line 36: **ero** - The *Explicit Route Object* is encoding the path of the TE LSP through the network.

### LSP Delegation

The LSP control delegations is an mechanism, where PCC grants to a PCE the temporary right in order to modify LSP attributes. The PCC can revoke the delegation or the PCE may waive the delegation at any time. The LSP control is delegated to at most one PCE at the same time.

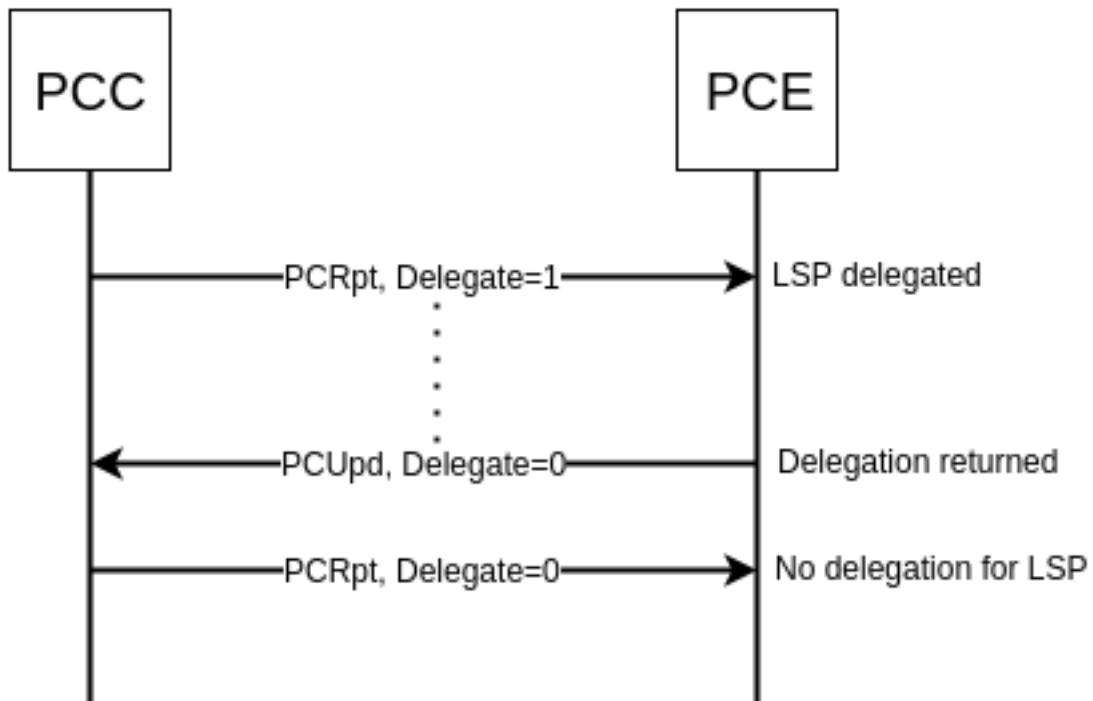


Fig. 11: Returning a Delegation.

---

Following RPC example illustrates a request for the LSP delegation give up:

**URL:** /restconf/operations/network-topology-pcep:update-lsp

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <input>
2   <node>pcc://43.43.43.43</node>
3   <name>foo</name>
4   <arguments>
5     <lsp xmlns:stateful="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
6       <delegate>false</delegate>
7       <administrative>true</administrative>
8       <tlvs>
9         <symbolic-path-name>
10        <path-name>Zm9v</path-name>
11        </symbolic-path-name>
12      </tlvs>
13    </lsp>
14  </arguments>
15  <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">
16    ↳ topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
17    topology-ref>
18 </input>

```

@line 2: **node** The PCC identifier.

@line 3: **name** The name of the LSP.

@line 6: **delegate** - Delegation flag set *false* in order to return the LSP delegation.

@line 10: **path-name** - The Symbolic Path Name TLV must be present when sending a request to give up the delegation.

## LSP Update

The LSP Update Request is an operation where a PCE requests a PCC to update attributes of an LSP and to rebuild the LSP with updated attributes. In order to update LSP, the PCE must hold a LSP delegation. The LSP update is done in *make-before-break* fashion - first, new LSP is initiated and then the old LSP is torn down.

Following RPC example shows a request for the LSP update:

**URL:** /restconf/operations/network-topology-pcep:update-lsp

**Method:** POST

**Content-Type:** application/xml

### Request Body:

```

1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <name>foo</name>
4   <arguments>
5     <lsp xmlns="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
6       <delegate>true</delegate>
7       <administrative>true</administrative>
8     </lsp>
9     <ero>
10    <subobject>
11      <loose>false</loose>
12      <ip-prefix>
13        <ip-prefix>200.20.160.41/32</ip-prefix>

```

(continues on next page)

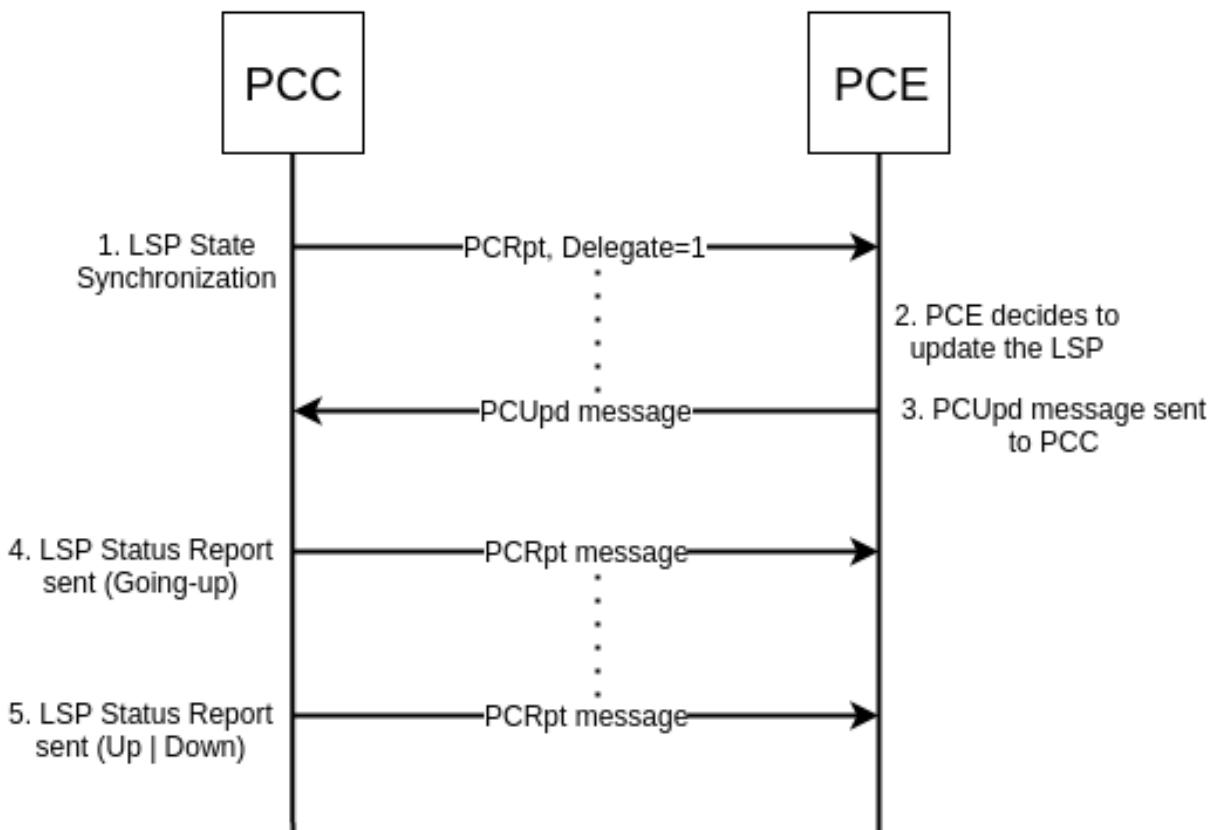


Fig. 12: Active Stateful PCE LSP Update.

(continued from previous page)

```

14      </ip-prefix>
15    </subobject>
16    <subobject>
17      <loose>false</loose>
18      <ip-prefix>
19        <ip-prefix>196.20.160.39/32</ip-prefix>
20      </ip-prefix>
21    </subobject>
22    <subobject>
23      <loose>false</loose>
24      <ip-prefix>
25        <ip-prefix>39.39.39.39/32</ip-prefix>
26      </ip-prefix>
27    </subobject>
28  </ero>
29 </arguments>
30 <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">/
31   topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
   topology-ref>
</input>

```

@line 2: **node** The PCC identifier.

@line 3: **name** The name of the LSP to be updated.

@line 6: **delegate** - Delegation flag set *true* in order to keep the LSP control.

@line 7: **administrative** - Desired administrative status of the LSP is active.

@line 9: **ero** - This LSP attribute is changed.

## PCE-initiated LSP Setup

The PCEP Extension for PCE-initiated LSP Setup allows PCE to request a creation and deletion of LSPs.

### Configuration

This capability is enabled by default. No additional configuration is required.

### LSP Instantiation

The PCE can request LSP creation. The LSP instantiation is done by sending an LSP Initiate Message to PCC. The PCC assign delegation to PCE which triggered creation. PCE-initiated LSPs are identified by *Create* flag.

Following RPC example shows a request for the LSP initiation:

**URL:** /restconf/operations/network-topology-pcep:add-lsp

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

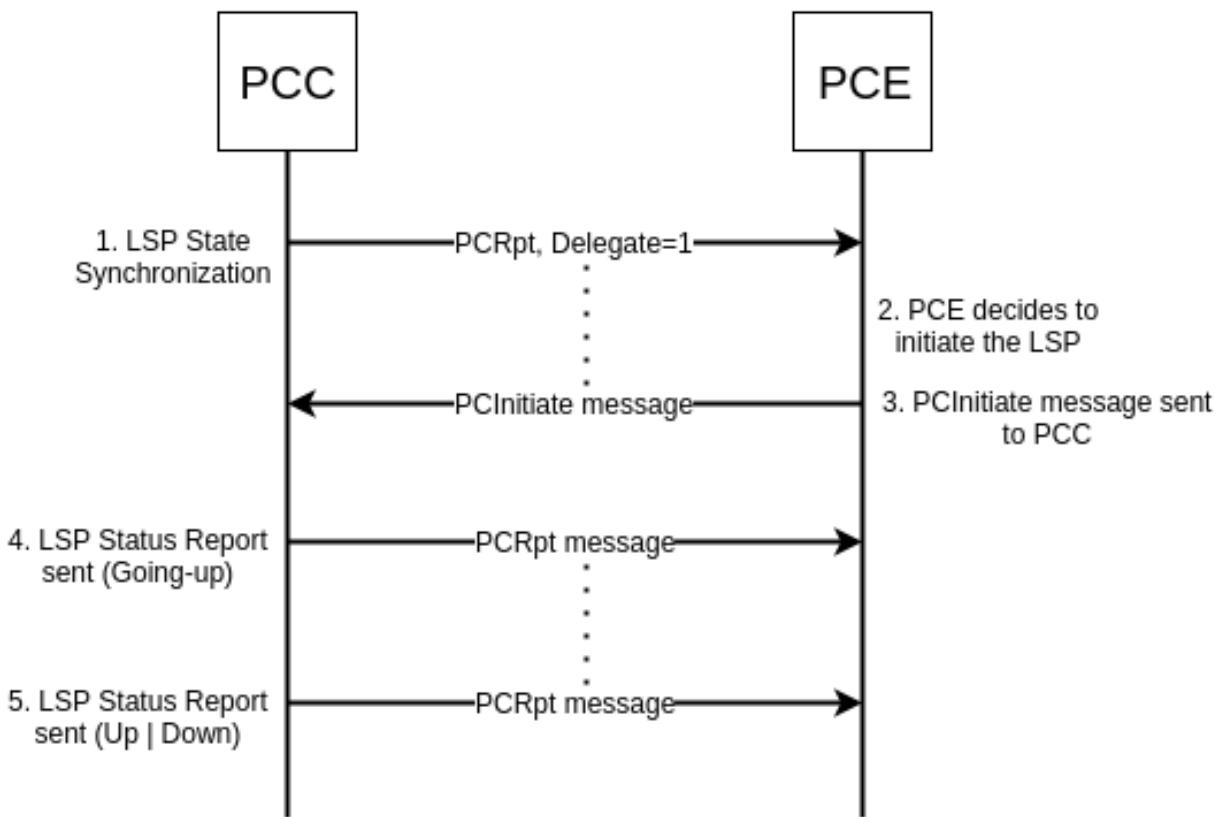


Fig. 13: LSP instantiation.

```

1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <name>update-tunel</name>
4     <arguments>
5       <lsp xmlns="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
6         <delegate>true</delegate>
7         <administrative>true</administrative>
8       </lsp>
9       <endpoints-obj>
10      <ipv4>
11        <source-ipv4-address>43.43.43.43</source-ipv4-address>
12        <destination-ipv4-address>39.39.39.39</destination-ipv4-address>
13      </ipv4>
14    </endpoints-obj>
15    <ero>
16      <subobject>
17        <loose>false</loose>
18        <ip-prefix>
19          <ip-prefix>201.20.160.40/32</ip-prefix>
20        </ip-prefix>
21      </subobject>
22      <subobject>
23        <loose>false</loose>
24        <ip-prefix>
25          <ip-prefix>195.20.160.39/32</ip-prefix>
26        </ip-prefix>
27      </subobject>
28      <subobject>
29        <loose>false</loose>
30        <ip-prefix>
31          <ip-prefix>39.39.39.39/32</ip-prefix>
32        </ip-prefix>
33      </subobject>
34    </ero>
35  </arguments>
36  <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">
37    ↵<topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
    ↵topology-ref>
</input>
```

@line 2: **node** The PCC identifier.

@line 3: **name** The name of the LSP to be created.

@line 8: **endpoints-obj** - The *END-POINT* Object is mandatory for an instantiation request of an RSVP-signaled LSP. It contains source and destination addresses for provisioning the LSP.

@line 14: **ero** - The *ERO* object is mandatory for LSP initiation request.

## LSP Deletion

The PCE may request a deletion of PCE-initiated LSPs. The PCE must be delegation holder for this particular LSP.

Following RPC example shows a request for the LSP deletion:

**URL:** /restconf/operations/network-topology-pcep:remove-lsp

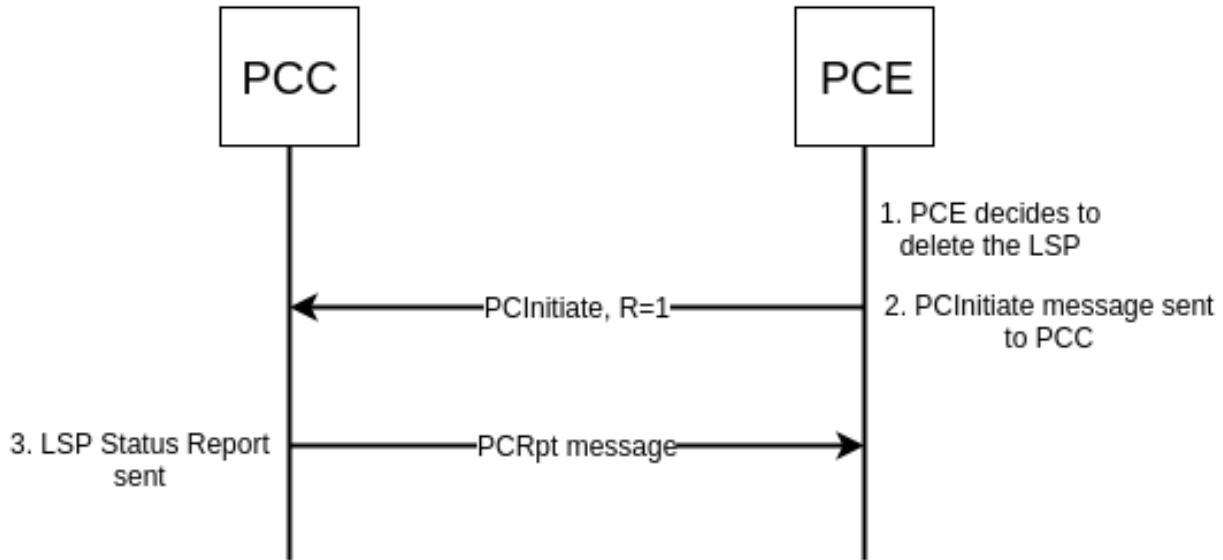


Fig. 14: LSP deletion.

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <name>update-tunel</name>
4   <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">/
5     topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
6     topology-ref>
7 </input>
```

@line 2: **node** The PCC identifier.

@line 3: **name** The name of the LSP to be removed.

### PCE-initiated LSP Delegation

The PCE-initiated LSP control is delegated to the PCE which requested the initiation. The PCC cannot revoke delegation of PCE-initiated LSP. When PCE returns delegation for such LSP or PCE fails, then the LSP become orphan and can be removed by a PCC after some time. The PCE may ask for a delegation of the orphan LSP.

---

Following RPC example illustrates a request for the LSP delegation:

**URL:** /restconf/operations/network-topology-pcep:update-lsp

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

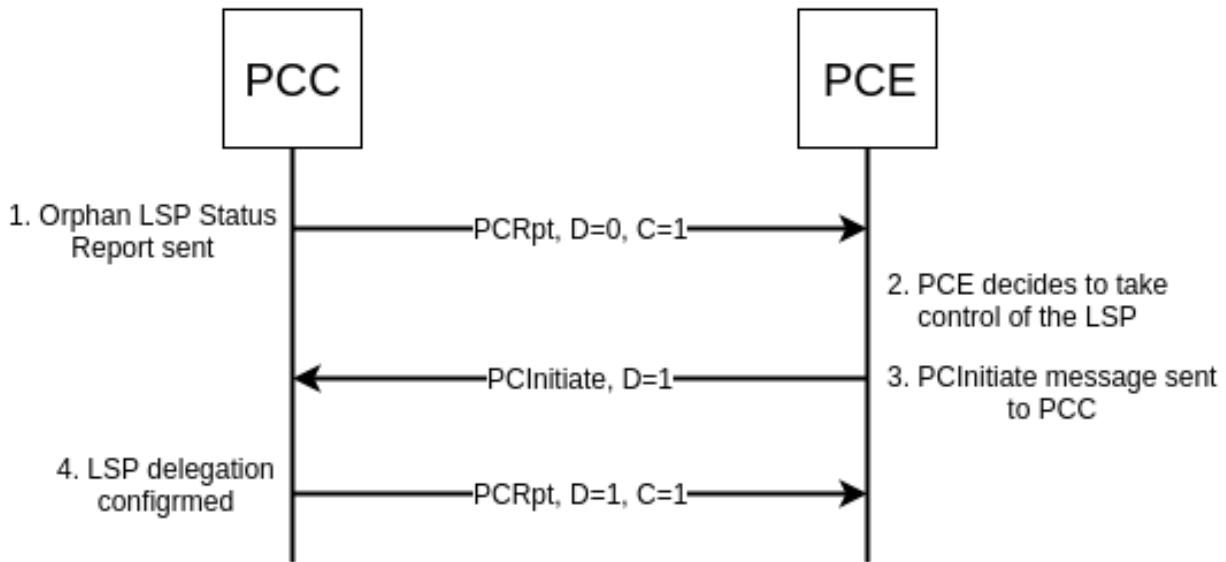


Fig. 15: Orphan PCE-initiated LSP - control taken by PCE.

```

1 <input>
2   <node>pcc://43.43.43.43</node>
3   <name>update-tunel</name>
4   <arguments>
5     <lsp xmlns:stateful="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
6       <delegate>true</delegate>
7       <administrative>true</administrative>
8       <tlvs>
9         <symbolic-path-name>
10        <path-name>dXBkYXR1LXR1bmVs</path-name>
11        </symbolic-path-name>
12      </tlvs>
13    </lsp>
14  </arguments>
15  <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">
16    topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
    topology-ref>
</input>
  
```

@line 2: **node** The PCC identifier.@line 3: **name** The name of the LSP.@line 6: **delegate** - *Delegation* flag set *true* in order to take the LSP delegation.@line 10: **path-name** - The *Symbolic Path Name* TLV must be present when sending a request to take a delegation.

## Segment Routing

The PCEP Extensions for Segment Routing (SR) allow a stateful PCE to compute and initiate TE paths in SR networks. The SR path is defined as an order list of *segments*. Segment Routing architecture can be directly applied to the MPLS forwarding plane without changes. Segment Identifier (SID) is encoded as a MPLS label.

## Configuration

This capability is enabled by default. In order to disable it, a configuration should be changed as follows:

**URL:** /restconf/config/pcep-segment-routing-app-config:pcep-segment-routing-app-config

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <pcep-segment-routing-config xmlns=
  ↵ "urn:opendaylight:params:xml:ns:yang:controller:pcep:segment-routing-app-config">
2   <sr-capable>false</sr-capable>
3 </pcep-segment-routing-config>
```

@line 2: **sr-capable** - True if capability is supported.

## IANA code points

In PCEP-SR draft version 6, SR Explicit Route Object/Record Route Object subobjects IANA code points change was proposed. In order to use the latest code points, a configuration should be changed as follows:

**URL:** /restconf/config/pcep-segment-routing-app-config:pcep-segment-routing-config

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```
1 <pcep-segment-routing-config xmlns=
  ↵ "urn:opendaylight:params:xml:ns:yang:controller:pcep:segment-routing-app-config">
2   <iana-sr-subobjects-type>true</iana-sr-subobjects-type>
3 </pcep-segment-routing-config>
```

@line 2: **iana-sr-subobjects-type** - True if IANA code points should be used.

## LSP Operations for PCEP SR

The PCEP SR extension defines new ERO subobject - *SR-ERO subobject* capable of carrying a SID.

```
sr-ero-type
+--- c-flag?           boolean
+--- m-flag?           boolean
+--- sid-type?         sid-type
+--- sid?              uint32
+--- (nai)?
  +--:(ip-node-id)
  | +--- ip-address      inet:ip-address
  +--:(ip-adjacency)
  | +--- local-ip-address    inet:ip-address
  | +--- remote-ip-address    inet:ip-address
  +--:(unnumbered-adjacency)
    +--- local-node-id     uint32
    +--- local-interface-id  uint32
```

(continues on next page)

(continued from previous page)

+---- remote-node-id	uint32
+---- remote-interface-id	uint32

Following RPC example illustrates a request for the SR-TE LSP creation:

**URL:** /restconf/operations/network-topology-pcep:add-lsp

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <name>sr-path</name>
4   <arguments>
5     <lsp xmlns="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
6       <delegate>true</delegate>
7       <administrative>true</administrative>
8     </lsp>
9     <endpoints-obj>
10    <ipv4>
11      <source-ipv4-address>43.43.43.43</source-ipv4-address>
12      <destination-ipv4-address>39.39.39.39</destination-ipv4-address>
13    </ipv4>
14  </endpoints-obj>
15  <path-setup-type xmlns="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
16    <pst>1</pst>
17  </path-setup-type>
18  <ero>
19    <subobject>
20      <loose>false</loose>
21      <sid-type xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing"
22        >ipv4-node-id</sid-type>
23        <m-flag xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">
24        true</m-flag>
25        <sid xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">
26        24001</sid>
27        <ip-address xmlns=
28          "urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">39.39.39.39</ip-address>
29      </subobject>
    </ero>
  </arguments>
<network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology"/>
  <topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
  topology-ref>
</input>
```

@line 16: **path-setup-type** - Set 1 for SR-TE LSP

@line 21: **ipv4-node-id** - The SR-ERO subobject represents *IPv4 Node ID NAI*.

@line 22: **m-flag** - The SID value represents an MPLS label.

@line 23: **sid** - The Segment Identifier.

Following RPC example illustrates a request for the SR-TE LSP update including modified path:

**URL:** /restconf/operations/network-topology-pcep:update-lsp

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```
1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <name>update-tunnel</name>
4   <arguments>
5     <lsp xmlns="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
6       <delegate>true</delegate>
7       <administrative>true</administrative>
8     </lsp>
9     <path-setup-type xmlns="urn:opendaylight:params:xml:ns:yang:pcep:ietf:stateful">
10       <pst>1</pst>
11     </path-setup-type>
12     <ero>
13       <subobject>
14         <loose>false</loose>
15         <sid-type xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing"
16           >ipv4-node-id</sid-type>
17           <m-flag xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">
18             true</m-flag>
19             <sid xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">
20               24002</sid>
21               <ip-address xmlns=
22                 "urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">200.20.160.41</ip-
23               address>
24             </subobject>
25             <subobject>
26               <loose>false</loose>
27               <sid-type xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing"
28                 >ipv4-node-id</sid-type>
29                 <m-flag xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">
30                   true</m-flag>
31                   <sid xmlns="urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">
32                     24001</sid>
33                     <ip-address xmlns=
34                       "urn:opendaylight:params:xml:ns:yang:pcep:segment:routing">39.39.39.39</ip-address>
35                   </subobject>
36                 </ero>
37               </arguments>
38               <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">/
39                 topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
40                 topology-ref>
41             </input>
```

## LSP State Synchronization Optimization Procedures

This extension bring optimizations for state synchronization:

- State Synchronization Avoidance
- Incremental State Synchronization

- PCE-triggered Initial Synchronization
- PCE-triggered Re-synchronization

## Configuration

This capability is enabled by default. No additional configuration is required.

## State Synchronization Avoidance

The State Synchronization Avoidance procedure is intended to skip state synchronization if the state has survived and not changed during session restart.

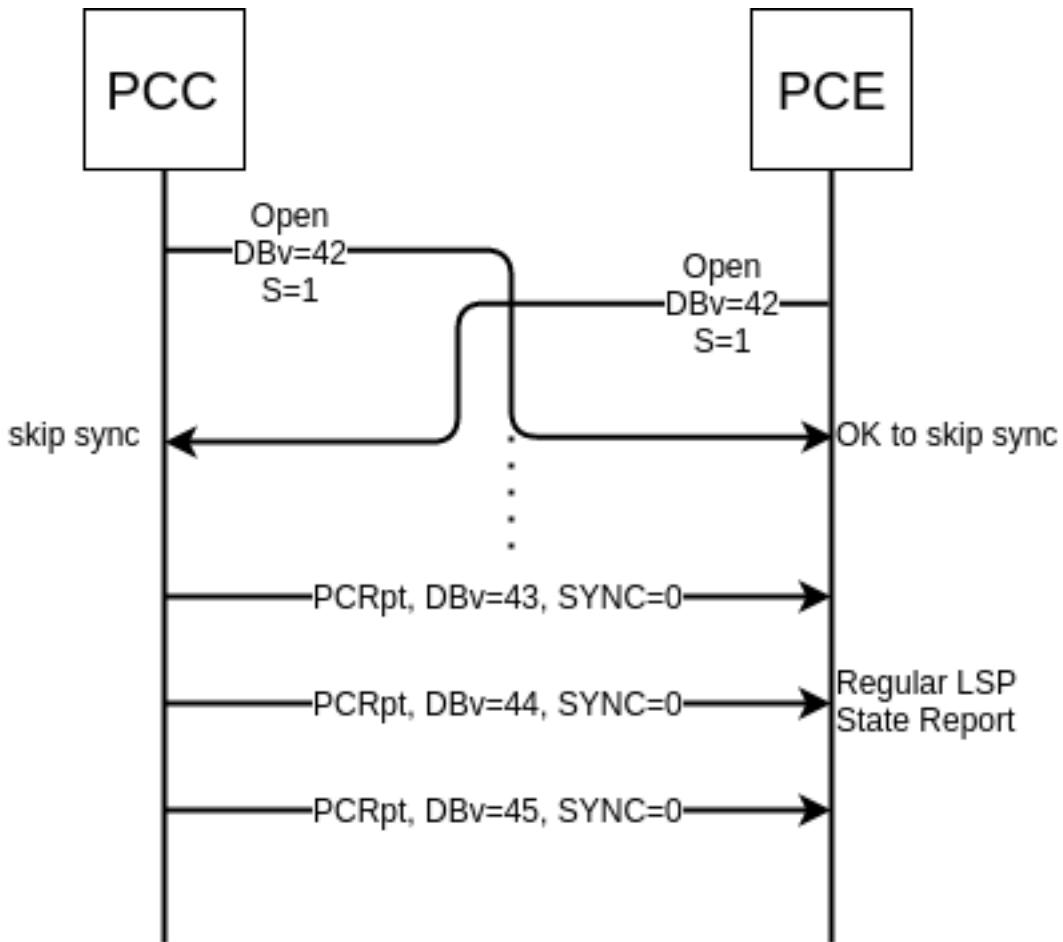


Fig. 16: State Synchronization Skipped.

## Incremental State Synchronization

The Incremental State Synchronization procedure is intended to do incremental (delta) state synchronization when possible.

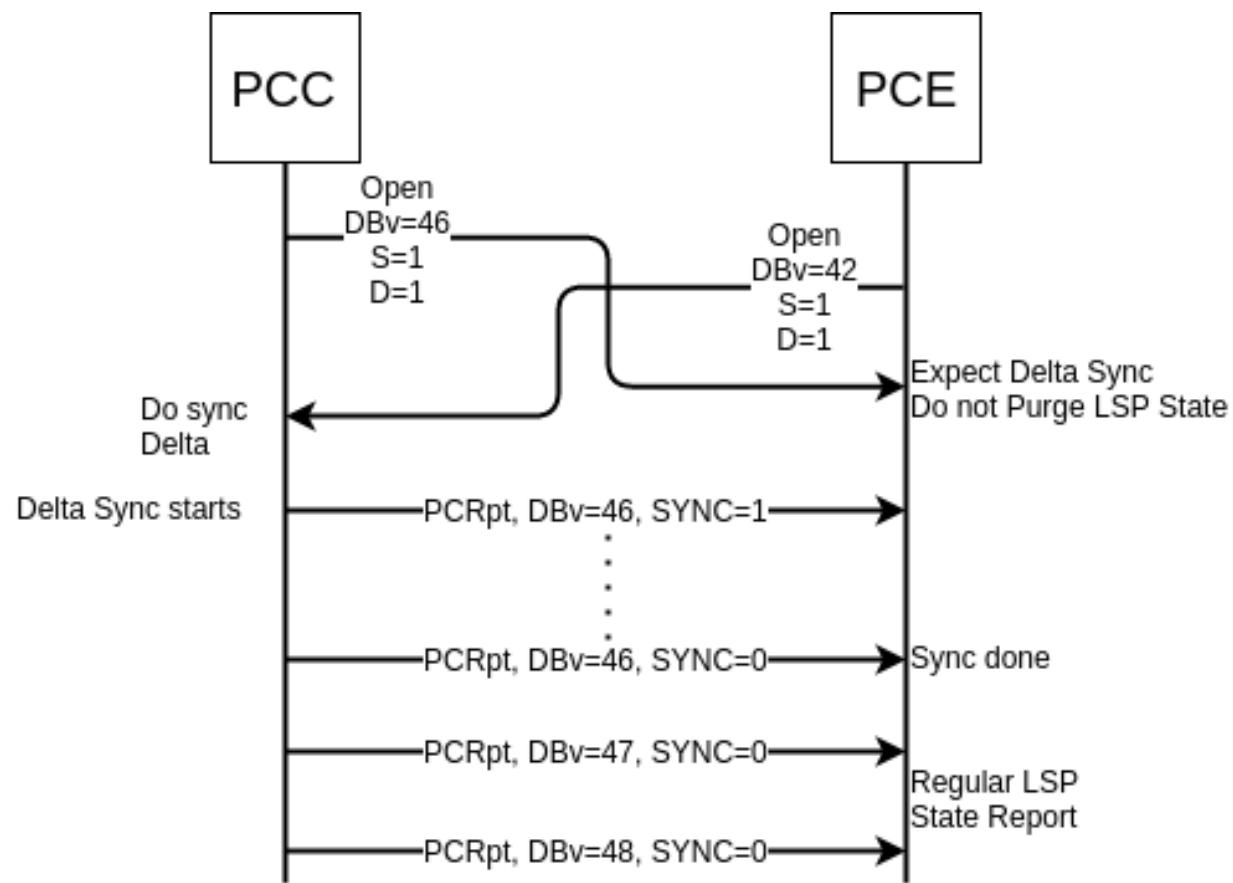


Fig. 17: Incremental Synchronization Procedure.

### PCE-triggered Initial Synchronization

The PCE-triggered Initial Synchronization procedure is intended to do let PCE control the timing of the initial state synchronization.

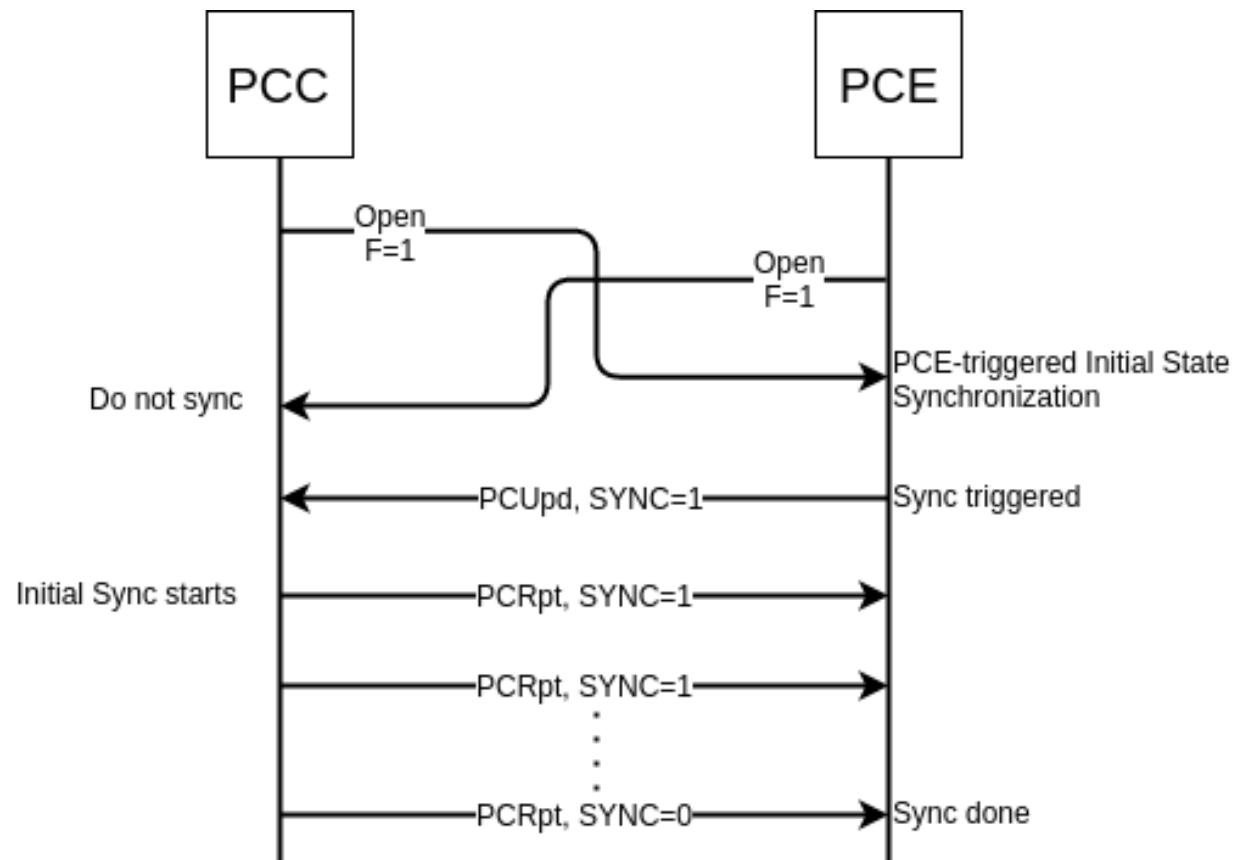


Fig. 18: PCE-triggered Initial State Synchronization Procedure.

Following RPC example illustrates a request for the initial synchronization:

**URL:** /restconf/operations/network-topology-pcep:trigger-sync

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">/
4     topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
      topology-ref>
</input>

```

### PCE-triggered Re-synchronization

The PCE-triggered Re-synchronization: To let PCE re-synchronize the state for sanity check.

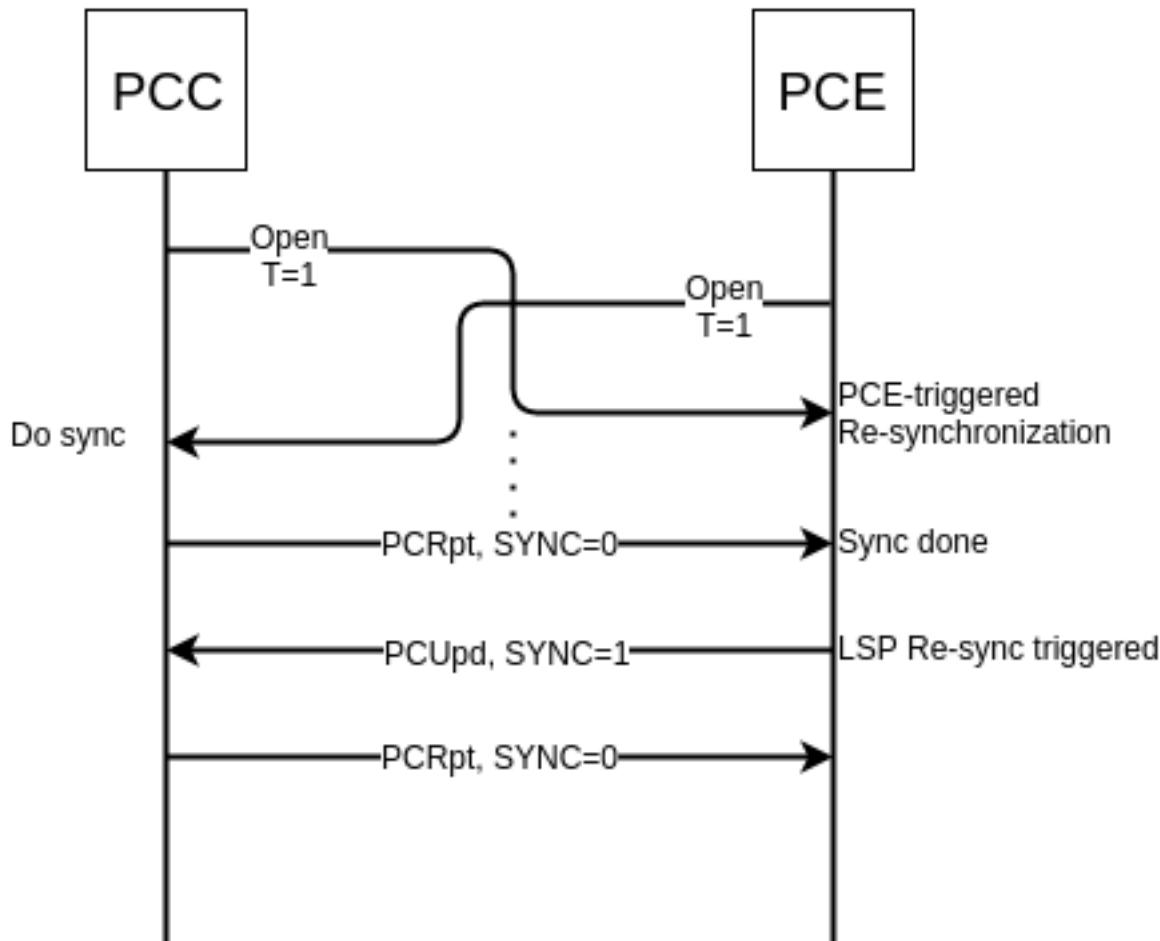


Fig. 19: PCE-triggered Re-synchronization Procedure.

Following RPC example illustrates a request for the LSP re-synchronization:

**URL:** /restconf/operations/network-topology-pcep:trigger-sync

**Method:** POST

**Content-Type:** application/xml

**Request Body:**

```

1 <input xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep">
2   <node>pcc://43.43.43.43</node>
3   <name>update-lsp</name>
4   <network-topology-ref xmlns:topo="urn:TBD:params:xml:ns:yang:network-topology">
5     topo:network-topology/topo:topology[topo:topology-id="pcep-topology"]</network-
      topology-ref>
</input>

```

@line 3: **name** - The LSP name. If this parameter is omitted, re-synchronization is requested for all PCC's LSPs.

### 2.3.5 Session statistics

The PCEP statistics provides information about PCE <-> PCC session and its stateful listener (topology-provider).

#### Usage

**URL:** /restconf/operational/network-topology:network-topology/topology/pcep-topology/node/pcc:%2F%2F43.43.43.43/pcep-session-state

**Method:** GET

#### Response Body:

```

1  <pcep-session-state xmlns="urn:opendaylight:params:xml:ns:yang:topology:pcep:stats">
2    <messages>
3      <last-received-rpt-msg-timestamp xmlns=
4        "urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">1512640592</last-received-
5        rpt-msg-timestamp>
6        <sent-upd-msg-count xmlns=
7          "urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">0</sent-upd-msg-count>
8        <received-rpt-msg-count xmlns=
9          "urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">2</received-rpt-msg-count>
10       <sent-init-msg-count xmlns=
11         "urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">0</sent-init-msg-count>
12         <sent-msg-count>0</sent-msg-count>
13         <last-sent-msg-timestamp>0</last-sent-msg-timestamp>
14         <unknown-msg-received>0</unknown-msg-received>
15         <received-msg-count>2</received-msg-count>
16         <error-messages>
17           <last-sent-error></last-sent-error>
18           <received-error-msg-count>0</received-error-msg-count>
19           <sent-error-msg-count>0</sent-error-msg-count>
20           <last-received-error></last-received-error>
21         </error-messages>
22       <reply-time>
23         <average-time>0</average-time>
24         <min-time>0</min-time>
25         <max-time>0</max-time>
26       </reply-time>
27     </messages>
28   <peer-pref>
29     <keepalive>30</keepalive>
30     <deadtimer>120</deadtimer>
31     <ip-address>127.0.0.1</ip-address>
32     <session-id>0</session-id>
33   </peer-pref>
34   <local-pref>
35     <keepalive>30</keepalive>
36     <deadtimer>120</deadtimer>
37     <ip-address>127.0.0.1</ip-address>
38     <session-id>0</session-id>
39   </local-pref>
40   <peer-capabilities>
41     <stateful xmlns="urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">true</
42     <stateful>
43       <instantiation xmlns="urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">
44         true</instantiation>

```

(continues on next page)

(continued from previous page)

```
38      <active xmlns="urn:opendaylight:params:xml:ns:yang:pcep:stateful:stats">true</
39      ↵active>
40      </peer-capabilities>
41      <session-duration>0:00:00:18</session-duration>
42      <delegated-lsps-count>1</delegated-lsps-count>
43      <synchronized>true</synchronized>
44  </pcep-session-state>
```

@line 3: **last-received-rpt-msg-timestamp** - The timestamp of last received PCRpt message.

@line 4: **sent-upd-msg-count** - The number of sent PCUpd messages.

@line 5: **received-rpt-msg-count** - The number of received Pcrpt messages.

@line 6: **sent-init-msg-count** - The number of sent PCInitiate messages.

@line 7: **sent-msg-count** - Total number of sent PCEP messages.

@line 8: **last-sent-msg-timestamp** - The timestamp of last sent message.

@line 9: **unknown-msg-received** - The number of received unknown messages.

@line 10: **received-msg-count** - Total number of received PCEP messages.

@line 13: **last-sent-error** - Type/value tuple of last sent error.

@line 14: **received-error-msg-count** - Total number of received PCErr messages.

@line 15: **sent-error-msg-count** - Total number of sent PCErr messages.

@line 16: **last-received-error** - Type/value tuple of last sent error.

@line 19: **keepalive** - Advertised keep-alive value.

@line 20: **deadtimer** - Advertised deadtimer value.

@line 21: **ip-address** - Peer's IP address.

@line 22: **session-id** - Peer's session identifier.

@line 25: **keepalive** - Advertised keep-alive value.

@line 26: **deadtimer** - Advertised deadtimer value.

@line 27: **ip-address** - Peer's IP address.

@line 28: **session-id** - Peer's session identifier.

@line 31: **stateful** - Represents peer's stateful/stateless capability.

@line 32: **instantiation** - Represents peer's instantiation capability.

@line 33: **active** - Represents peer's LSP update capability.

@line 35: **session-duration** - Elapsed time (in d:H:m:s) from session-up until last statistic update.

@line 36: **delegated-lsps-count** - The number of delegated LSPs (tunnels) from PCC.

@line 37: **synchronized** - Represents synchronization status.

## 2.3.6 CLI

PCEP Karaf Console (odl-bgpcep-pcep-cli) provides a CLI feature to read session statistics per node.

```
opendaylight-user@root> pcep:node-state -topology-id pcep-topology -node-id pcc://43.
→ 43.43.43
```

## 2.3.7 Test tools

### PCC Mock

The PCC Mock is a stand-alone Java application purposed to simulate a PCC(s). The simulator is capable to report sample LSPs, respond to delegation, LSP management operations and synchronization optimization procedures. This application is not part of the OpenDaylight Karaf distribution, however it can be downloaded from OpenDaylight's Nexus (use latest release version):

<https://nexus.opendaylight.org/content/repositories/opendaylight.release/org/opendaylight/bgpcep/pcep-pcc-mock>

### Usage

The application can be run from command line:

```
java -jar pcep-pcc-mock-*--executable.jar
```

with optional input parameters:

```
--local-address <Address:Port> (optional, default 127.0.0.1)
  The first PCC IP address. If more PCCs are required, the IP address will be
  ↪ incremented. Port number can be optionally specified.

--remote-address <Address1:Port1,Address2:Port2,Address3:Port3,...> (optional,
  ↪ default 127.0.0.1:4189)
  The list of IP address for the PCE servers. Port number can be optionally
  ↪ specified, otherwise default port number 4189 is used.

--pcc <N> (optional, default 1)
  Number of mocked PCC instances.

--lsp <N> (optional, default 1)
  Number of tunnels (LSPs) reported per PCC, might be zero.

--pcerr (optional flag)
  If the flag is present, response with PCErr, otherwise PCUpd.

--log-level <LEVEL> (optional, default INFO)
  Set logging level for pcc-mock.

-d, --deadtimer <0..255> (optional, default 120)
  DeadTimer value in seconds.

-ka, --keepalive <0..255> (optional, default 30)
  KeepAlive timer value in seconds.

--password <password> (optional)
  If the password is present, it is used in TCP MD5 signature, otherwise plain TCP
  ↪ is used.
```

(continues on next page)

(continued from previous page)

```
--reconnect <seconds> (optional)
    If the argument is present, the value in seconds, is used as a delay before each new reconnect (initial connect or connection re-establishment) attempt.
    The number of reconnect attempts is unlimited. If the argument is omitted, pcc-mock is not trying to reconnect.

--redelegation-timeout <seconds> (optional, default 0)
    The timeout starts when LSP delegation is returned or PCE fails, stops when LSP is re-delegated to PCE.
    When timeout expires, LSP delegation is revoked and held by PCC.

--state-timeout <seconds> (optional, default -1 (disabled))
    The timeout starts when LSP delegation is returned or PCE fails, stops when LSP is re-delegated to PCE.
    When timeout expires, PCE-initiated LSP is removed.

--state-sync-avoidance <disconnect_after_x_seconds> <reconnect_after_x_seconds>
→<dbVersion>
    Synchronization avoidance capability enabled.
        - disconnect_after_x_seconds: seconds that will pass until disconnections is forced. If set to smaller number than 1, disconnection wont be performed.
        - reconnect_after_x_seconds: seconds that will pass between disconnection and new connection attempt. Only happens if disconnection has been performed.
        - dbVersion: dbVersion used in new Open and must be always equal or bigger than LSP. If equal than LSP skip synchronization will be performed, if not full synchronization will be performed taking in account new starting dbVersion desired.

--incremental-sync-procedure <disconnect_after_x_seconds> <reconnect_after_x_seconds>
→ <dbVersion>
    Incremental synchronization capability enabled.
        - dbVersion: dbVersion used in new Open and must be always bigger than LSP.
        Incremental synchronization will be performed taking in account new starting dbVersion desired.

--triggered-initial-sync
    PCE-triggered synchronization capability enabled. Can be combined with state-sync-avoidance/incremental-sync-procedure.

--triggered-re-sync
    PCE-triggered re-synchronization capability enabled.
```

## Data Change Counter Tool

Data Change Counter tool registers a Data Change Listener to a specified topology's subtree. This will allow us to know the quantity of changes produced under it, with each data change event counter will be incremented.

## Installation

Installing data change counter tool

```
feature:install odl-restconf odl-bgpcep-data-change-counter
```

## Configuration

Once we set the configuration, a new data change counter will be created and registers to example-linkstate-topology.

---

**Important: Clustering** - Each Counter Identifier should be unique.

---

**URL:** /restconf/config/odl-data-change-counter-config:data-change-counter-config/data-change-counter

**Method:** PUT

**Content-Type:** application/xml

**Request Body:**

```

1 <data-change-counter-config xmlns="urn:opendaylight:params:xml:ns:yang:bgpcep:data-
2   ↵change-counter-config">
3     <counter-id>data-change-counter</counter-id>
4     <topology-name>example-linkstate-topology</topology-name>
5   </data-change-counter-config>
```

@line 2: **Counter Id** - Unique counter change identifier.

@line 3: **Topology Name** - An identifier for a topology.

## Usage

Counter state for topology

**URL:** /restconf/operational/data-change-counter:data-change-counter/counter/data-change-counter

**Method:** GET

**Response Body:**

```

1 <counter xmlns="urn:opendaylight:params:xml:ns:yang:bgp-data-change-counter">
2   <id>data-change-counter</id>
3   <count>0</count>
4 </counter>
```

@line 2: **Counter Id** - Unique counter change identifier.

@line 3: **Count** - Number of changes under registered topology's subtree.

### 2.3.8 Troubleshooting

This section offers advices in a case OpenDaylight PCEP plugin is not working as expected.

#### Contents

- *PCEP is not working...*
- *Bug reporting*
  - *References*

## PCEP is not working...

- First of all, ensure that all required features are installed, local PCE and remote PCC configuration is correct.

To list all installed features in OpenDaylight use the following command at the Karaf console:

```
feature:list -i
```

- Check OpenDaylight Karaf logs:

From Karaf console:

```
log:tail
```

or open log file: data/log/karaf.log

Possibly, a reason/hint for a cause of the problem can be found there.

- Try to minimize effect of other OpenDaylight features, when searching for a reason of the problem.
- Try to set DEBUG severity level for PCEP logger via Karaf console commands, in order to collect more information:

```
log:set DEBUG org.opendaylight.protocol.pcep
```

```
log:set DEBUG org.opendaylight.bgpcep.pcep
```

## Bug reporting

Before you report a bug, check BGPCEP Jira to ensure same/similar bug is not already filed there.

Write an e-mail to [bgpcep-users@lists.opendaylight.org](mailto:bgpcep-users@lists.opendaylight.org) and provide following information:

1. State OpenDaylight version
2. Describe your use-case and provide as much details related to PCEP as possible
3. Steps to reproduce
4. Attach Karaf log files, optionally packet captures, REST input/output

## References

- A Path Computation Element (PCE)-Based Architecture
- Path Computation Element (PCE) Communication Protocol Generic Requirements
- Unanswered Questions in the Path Computation Element Architecture
- A PCE-Based Architecture for Application-Based Network Operations
- Framework for PCE-Based Inter-Layer MPLS and GMPLS Traffic Engineering
- Applicability of a Stateful Path Computation Element (PCE)